



COMMERCIAL  
PRODUCT CATALOG

# OfficeMart

#Sololosmejoresmuebles

SHELVING  
CARTS  
LAB FURNITURE  
WORKSTATIONS  
MERCHANDISERS



# Advantage Metro.

Looking for  
high-touch services?

Metro can make everything  
from application visualization  
to service easy.

## Professional Services Available:

- “SpaceAudits” to Maximize Your Storage Potential
- Product Planning and Room Layout
- Project Quoting and Management
- 3D Product and Application Visualization
- Custom Product Design and Engineering
- Metro ESP—Enhanced Service Program

# ESP<sup>PRO</sup>

ENHANCED SPACE PRODUCTIVITY



The easier it is to be able to perform job tasks correlates directly to profitability and employee happiness.

Metro-certified ESPPro™ specialists evaluate your process, your product, and your purpose to provide a complete system designed to help you work.

Increase  
productivity  
up to  
**2X**



Increase  
accessible  
storage  
up to  
**40%**

Metro-certified ESPPro™ specialists evaluate your space to provide the ideal space optimizing solution.


# Experience The Metro Effect.



## CONNECT ON LINKEDIN

Keep informed on latest industry trends,  
product opportunities, and Metro innovations.

[www.linkedin.com/company/intermetroindustriescorp](http://www.linkedin.com/company/intermetroindustriescorp)

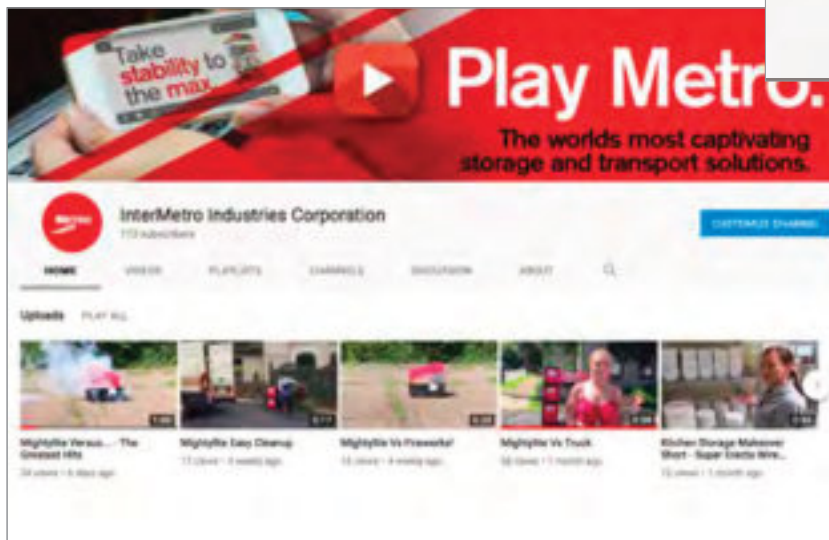

## WATCH US ON YOUTUBE

See the latest how-to videos, product informational  
videos and industry entertainment.

[www.metro.com/YouTube](http://www.metro.com/YouTube)





# Contents

## Polymer Shelving Solutions ..... 8-29

MetroMax Platform Overview .....	10-11
MetroMax i Shelves& Posts .....	12-13
MetroMax 4 Shelves& Posts .....	14-15
MetroMax Q Shelves& Posts .....	16-17
Casters, Pull & Push Handles .....	18-19
Mobile Shelving Units & Utility Carts .....	20-21
MetroMax Platform Accessories .....	22-29

## Wire and Solid Shelving Solutions ..... 32-79

Wire/Polymer Hybrid Shelving .....	32-35
Easy-Adjust Shelving & Carts .....	36-39
Wire Shelving, Carts & Trucks .....	40-49
Casters & Accessories for Wire Shelving .....	50-63
Appeal Display Shelving .....	64-65
qwikSLOT Adjustable Shelving .....	65-71
Shelving Storage Bins .....	72-73
Solid Shelving & Accessories .....	74-76
Light-Duty Wire Shelving & Accessories .....	77
Heavy-Duty Solid Shelving & Accessories .....	78-79

## Wall Shelving, Workstations & Worktables .... 82-104

SmartWall Grid & Wall Shelving .....	82-90
PrepMate Multi Stations .....	91-92
SmartLever Multifunctional Workstations .....	93-95
SmartStation Productivity Workstations .....	96-97
Stainless Steel Worktables & Accessories .....	98-101
Heavy-Duty Work Tables & Accessories .....	102-104

## High-Density Storage & Seismic Shelving ..... 108-121

High-Density Movable Aisle Shelving .....	108-118
Vertical High-Density Shelving .....	119
Seismic Shelving .....	120-121

## Utility Carts, Dunnage & Security ..... 122-137

Polymer Utility Carts .....	124-127
Wire & Solid Utility Carts .....	128-129
Dunnage Racks & Shelves .....	130-131
Security Storage .....	132-137



## Grocery & Retail Products ..... 138-153

Grocery Solutions .....	140-147
Retail Solutions .....	148-149
Speciality Shelving .....	150-152
Mobile Tray & Drying Racks.....	153

## Laboratory Products ..... 154-225

Lab Carts & Storage .....	156-169
Lab Storage, Autoclave Storage & Carts .....	170-175
LAR Feed Carts & Storage.....	176-177
Starsys Lab Furniture.....	178-210
Cannabis Solutions .....	211

## Electronics & CleanRoom Products ..... 212-235

PCB Handling, Carts & Covers .....	214-221
High-Density, Reel & Stencil Storage .....	222-225
Casters, Accessories, Tote Boxes & Bins .....	226-229
Clean Tables, Carts & Gowning Room Products .....	230-235


## Municipal Services Products ..... 236-240

Turn-out Gear/General Storage and Security .....	238
Sanitation & Electronic Charging Stations .....	239
Evidence & Property Storage .....	240

Terms and Conditions .....	241-242
----------------------------	---------

Index.....	Inside Back Cover
------------	-------------------

Locations .....	Back Cover
-----------------	------------

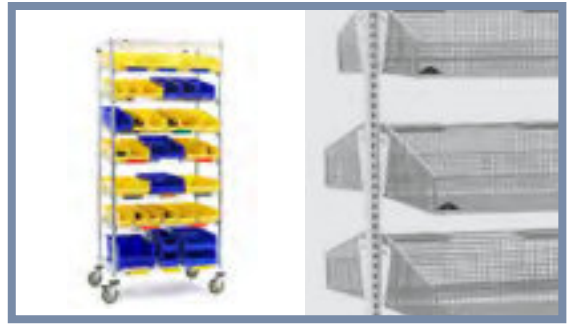



# Metro® stands alone.

Leading the industry in stability, mobility and efficiency.



MetroMax® i	MetroMax® 4	MetroMax® Q	Super Erecta Pro®	Metroseal 3™	Chrome Plated & BRITE	Type 304 Stainless Steel
Ultimate Lifetime Storage and Handling System.	Corrosion Proof with Unrivaled Value.	Quick-to-Clean. Quick-to-Adjust.	Durable & Cleanable. The Original...Reinnovated.	The Original Wire Shelving for Wet Environments.	Basic Storage and Transport for Dry Environments.	Long Life Use in the Toughest Environments.
HHHH Corrosion Protection	HHHH Corrosion Protection	HHH Corrosion Protection	HHH Corrosion Protection	HH Corrosion Protection	Dry Environments	HHHH Corrosion Protection
HHHH Cleanability	HHHH Cleanability	HHH Cleanability	HHH Cleanability	HH Cleanability	HH Cleanability	HH Cleanability
HHHH Tear Resistance	HHHH Tear Resistance	HH Tear Resistance	HH Tear Resistance	H Tear Resistance	H Tear Resistance	H Tear Resistance
800lbs. (363kg) Shelf Capacity	600lbs. (272kg) Shelf Capacity	800lbs. (363kg) Shelf Capacity	800lbs. (363kg) Shelf Capacity	800lbs. (363kg) Shelf Capacity	800lbs. (363kg) Shelf Capacity	800lbs. (363kg) Shelf Capacity
\$\$\$ Relative Price	\$\$\$ Relative Price	\$\$\$ Relative Price	\$ Relative Price	\$ Relative Price	\$ Relative Price	\$\$\$\$\$ Relative Price

PROTECTION THAT LIVES ON  
**MICROBAN®**

PROTECTION THAT LIVES ON  
**MICROBAN®**

PROTECTION THAT LIVES ON  
**MICROBAN®**

PROTECTION THAT LIVES ON  
**MICROBAN®**

PROTECTION THAT LIVES ON  
**MICROBAN®**

## Superior materials and design for every application.

Robust Corners and Frames • Proven Stability

Durable Finishes • Advanced Polymer Materials • Type 304 Stainless Steel

Easy-to-Adjust in Increments of 1" (25mm)

PROTECTION THAT LIVES ON  
**MICROBAN®**

MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



SUPPORTS GOOD  
**HACCP**  
PROCESSES

**Metro incorporates several elements in its product design to support cleaning protocols:**



- Microban® antimicrobial product protection helps keep shelves "cleaner between cleanings" by inhibiting the growth of mold, mildew, fungus, and bacteria that cause odors and stains on the shelf surface.
- Advanced polymer and other proprietary finishes provide corrosion resistance.
- Smooth rounded corners to allow for easier cleaning.

### **MetroMax® i:**

The strongest, most versatile, corrosion proof shelving system in the world.

### **MetroMax® 4:**

The Corrosion proof performance, proven Metro stability, and unrivaled value.

### **MetroMax® Q:**

Quick adjustment, corrosion resistance and the strength of steel.

### **Super Adjustable Super Erecta®:**

The easiest to adjust wire shelving system ever.

### **qwikSLOT®:**

Add-A-Shelf, Remove-A-Shelf... Instantly.

### **Super Erecta Pro®:**

Durable and Cleanable.  
The original —reinnovated.

### **Super Erecta®:**

The Original Wire Storage and Handling System.

### **Drop Mat®:**

Provides density and containment economically.

### **Super Erecta® Solid:**

A solid performer in the proven SuperErecta style.





# Take confidence to the max.

**MetroMax<sup>®</sup>** All-Polymer Shelving System





MetroMax Shelving

# CORROSION PROOF POLYMER & HYBRID POLYMER/WIRE SHELVING

MetroMax Shelving Overview .....	10-11
MetroMax i Shelves & Posts .....	12-13
MetroMax 4 Shelves & Posts .....	14-15
MetroMax Q Shelves & Posts .....	16-17
Casters, Pull & Push Handles .....	18-19
Mobile Shelving Units & Utility Carts .....	20-21
MetroMax Accessories .....	22-29

# MetroMax<sup>®</sup>

# Forever Shelving.

Stronger,  
cleaner,  
superior  
in any  
environment.

Interchangeable Posts



Interchangeable Shelves

**PLUS NEW**  
MetroMax 4  
Grid Shelf (pictured)  
or Solid Shelf

MetroMax Q  
Grid Shelf

MetroMax i  
Solid Shelf

MetroMax i  
Grid Shelf

MetroMax i  
Heavy-Duty  
Grid Shelf

**NEW**



PROTECTION THAT LIVES ON  
**MICROBAN**

SUPPORTS GOOD  
**HACCP**  
PROCESSES

MetroMax<sup>®</sup> Q



GOOD



**RUST RESISTANT POLYMER  
& COATED WIRE**  
with Removable Shelf Mats

Quick adjustment, corrosion  
resistance and the strength of steel.



**15-YEAR**  
CORROSION WARRANTY



EASY-TO-CLEAN,  
REMOVABLE MATS



**HOLDS UP TO 800 LBS**  
(363kg) PER SHELF  
**2000 LBS** (907kg) PER UNIT  
**1000 LBS** (454kg) PER MOBILE UNIT

- DEPTHS: 18", 21", 24" [457, 530, 610mm]
- LENGTHS: 24/30/36/42/48/54/60/72"  
[610/760/914/1060/1219/1372/1524/1829mm]





## MetroMax® 4



# BETTER



## 100% RUST-PROOF ALL-POLYMER

Corrosion proof performance, proven Metro stability, and unrivaled value.



**LIFETIME**  
CORROSION WARRANTY



EASY-TO-CLEAN,  
REMOVABLE MATS



**HOLDS UP TO 600 LBS**  
(272kg) PER SHELF  
**2000 LBS** (907kg) PER UNIT  
**750 LBS** (340kg) PER MOBILE UNIT



TEAR RESISTANT  
SURFACES

- DEPTHS: 18", 21", 24" [457, 530, 610mm]
- LENGTHS: 24/30/36/42/48/54/60"  
[610/760/914/1060/1219/1372/1524mm]



## MetroMax® i



# BEST



## 100% RUST-PROOF ALL-POLYMER

with Super Strong StainlessSteel Corners

The strongest, most versatile, corrosion proof shelving system in the world.



**LIFETIME**  
CORROSION WARRANTY



EASY-TO-CLEAN,  
REMOVABLE MATS



**HOLDS UP TO 800 LBS**  
(363kg) PER SHELF  
**2000 LBS** (907kg) PER UNIT  
**1000 LBS** (454kg) PER MOBILE UNIT



TEAR RESISTANT  
SURFACES

- DEPTHS: 18", 24" [457, 610mm]
- LENGTHS: 24/30/36/42/48/54/60/72"  
[610/760/914/1060/1219/1372/1524/1829mm]





## MetroMax® i Polymer Shelving — {9.20}

### Standard Shelves

- Part number includes shelf with removable mats and one bag of wedges.

Width (in.)	Nominal (mm)	Length (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Shelf with Grid Mat	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Shelf with Solid Mat
18	457	24	610	8.7	4.0	<b>MX1824G</b>	12.7	5.8	<b>MX1824F</b>
18	457	30	760	10.5	4.7	<b>MX1830G</b>	14.5	6.6	<b>MX1830F</b>
18	457	36	914	12.2	5.5	<b>MX1836G</b>	17.2	7.8	<b>MX1836F</b>
18	457	42	1060	13.9	5.3	<b>MX1842G</b>	20.1	9.1	<b>MX1842F</b>
18	457	48	1219	15.7	7.1	<b>MX1848G</b>	23.1	10.5	<b>MX1848F</b>
18	457	54	1372	17.5	7.9	<b>MX1854G</b>	21.5	9.7	<b>MX1854F</b>
18	457	60	1524	19.2	8.7	<b>MX1860G</b>	23.2	10.5	<b>MX1860F</b>
18	457	72	1829	22.5	10.2	<b>MX1872G</b>	27.5	12.5	<b>MX1872F</b>
24	610	24	610	12.2	5.5	<b>MX2424G</b>	14.2	6.4	<b>MX2424F</b>
24	610	30	760	13.9	6.3	<b>MX2430G</b>	15.9	7.2	<b>MX2430F</b>
24	610	36	914	15.6	7.1	<b>MX2436G</b>	19.6	8.9	<b>MX2436F</b>
24	610	42	1060	17.5	7.9	<b>MX2442G</b>	21.5	9.8	<b>MX2442F</b>
24	610	48	1219	19.3	8.7	<b>MX2448G</b>	25.3	11.5	<b>MX2448F</b>
24	610	54	1372	21.0	9.5	<b>MX2454G</b>	25.0	11.3	<b>MX2454F</b>
24	610	60	1524	22.8	10.5	<b>MX2460G</b>	26.8	12.1	<b>MX2460F</b>
24	610	72	1829	26.0	11.8	<b>MX2472G</b>	31.0	14.1	<b>MX2472F</b>

**Actual Dimensions:** Width: Add 1/4" (6mm) to nominal size. Length: Subtract 1/4" (6mm) from nominal size.  
**Maximum weight capacity evenly distributed:** Up to and including 48" (1220mm) long shelf, 800 lbs. (363kg);  
 54" (1372mm) and longer, 600 lbs. (272kg).



Standard shelf with solid mat



Standard shelf with grid mat



Heavy-duty grid shelf

### Heavy-Duty Dunnage Shelves

- Weight capacity per shelf evenly distributed: 1,200 lbs. (544kg) on shelves up to and including 48" (1220mm) long; 900 lbs. (408kg) for shelves 60" (1524mm) long.

Nominal Width (in.)	(mm)	Length (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Shelf with Grid Mat
24	610	36	914	21	9.5	<b>MHP2436G</b>
24	610	48	1220	27	12.2	<b>MHP2448G</b>
24	610	60	1524	33	15.0	<b>MHP2460G</b>

(Dunnage shelves are not recommended for use as part of an add-on unit with two posts.)

### Polymer Posts

- Corrosionproof with built-in Microban antimicrobial product protection.
- Stationary posts include an adjustable leveling foot to compensate for uneven floors. Leveling foot can be adjusted 1" (25mm).

Nominal Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Stationary Post with Leveling Foot	Cat. No. Mobile Post for Stem Caster
9	228	0.3	0.15	—	<b>MX9UP</b>
13	330	0.5	0.2	<b>MX13P</b>	<b>MX13UP</b>
27	685	0.9	0.4	<b>MX27P</b>	<b>MX27UP</b>
33	838	1.0	0.5	<b>MX33P</b>	<b>MX33UP</b>
54	1372	1.6	0.7	<b>MX54P</b>	<b>MX54UP</b>
63	1600	1.8	0.8	<b>MX63P</b>	<b>MX63UP</b>
74	1880	2.2	1.0	<b>MX74P</b>	<b>MX74UP</b>
86	2184	3.0	1.4	<b>MX86P</b>	<b>MX86UP</b>

(Special height cut posts are available. Consult your Metro representative.)



PROTECTION THAT LIVES ON  
**MICROBAN**



### MetroMax® i Replacement Wedges

Bag of (4)  
 Cat. No. MX9985  
 MetroMax® i Wedges are not compatible with original MetroMax shelves and posts.



### Post Clamp

Adds stability by joining posts of two separate units together. With it, each unit is supported by four posts and buttressed by the adjacent unit.  
 Cat. No. 9994X



### Foot Plate



Use to add stability to the shelving unit or to bolt units to the floor.  
 Cat. No. Zinc 9993Z  
 Cat. No. Stainless Steel 9993S

**NOTE:** For maximum rigidity on heavily loaded carts, the steel posts may be used. See page 16 for models.

Note: MetroMax® i shelves, posts, and wedges are not compatible with original MetroMax shelves and posts.

## MetroMax® i Shelving Starter and Add-On Units – {9.10}

- Starter Units consist of four polymer posts and indicated number of MetroMax i shelves.
- Add-On Units consist of two polymer posts, indicated number of shelves, and two “S” Hooks per shelf, for attaching add-on unit to starter unit in an end-to-end configuration. To attach shelves at right angles, Intermediate “S” Hook Kits must be ordered separately.



- Regular “S” Hook location
- Intermediate bracket location
- Post
- Post not required



Add-On units with “S” hooks can only be attached to shelves supported by two or more posts.

4-Tier Unit with 63" posts									
Nominal Width/Length (in.)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Add-On Unit		
18x24	457x610	48.0	21.8	<b>X316GX3</b>	44.0	20.0	<b>AX316GX3</b>		
18x30	457x760	52.0	23.6	<b>X326GX3</b>	48.0	21.8	<b>AX326GX3</b>		
18x36	457x914	56.0	25.4	<b>X336GX3</b>	52.0	23.6	<b>AX336GX3</b>		
18x42	457x1060	64.0	29.0	<b>X346GX3</b>	60.0	27.2	<b>AX346GX3</b>		
18x48	457x1219	72.0	32.7	<b>X356GX3</b>	68.0	30.8	<b>AX356GX3</b>		
18x60	457x1524	88.0	39.9	<b>X366GX3</b>	84.0	38.1	<b>AX366GX3</b>		
18x72	457x1829	100.0	45.4	<b>X376GX3</b>	96.0	43.5	<b>AX376GX3</b>		
24x24	610x610	54.0	24.5	<b>X516GX3</b>	50.0	22.7	<b>AX516GX3</b>		
24x30	610x760	64.0	29.0	<b>X526GX3</b>	60.0	27.2	<b>AX526GX3</b>		
24x36	610x914	68.0	30.8	<b>X536GX3</b>	64.0	29.0	<b>AX536GX3</b>		
24x42	610x1060	76.0	34.5	<b>X546GX3</b>	72.0	32.7	<b>AX546GX3</b>		
24x48	610x1219	84.0	38.1	<b>X556GX3</b>	80.0	36.3	<b>AX556GX3</b>		
24x60	610x1524	92.0	41.7	<b>X566GX3</b>	88.0	39.9	<b>AX566GX3</b>		
24x72	610x1829	116.0	52.6	<b>X576GX3</b>	112.0	50.8	<b>AX576GX3</b>		

**Actual Dimensions:** Width: Add 1/4" (6mm) to nominal size.  
Length: Subtract 1/4" (6mm) from nominal size.

5-Tier Unit with 74" posts									
Nominal Width/Length (in.)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Add-On Unit		
60.0	27.2	<b>5X317GX3</b>	55.0	24.9	<b>5AX317GX3</b>				
65.0	29.5	<b>5X327GX3</b>	60.0	27.2	<b>5AX327GX3</b>				
70.0	31.8	<b>5X337GX3</b>	65.0	29.5	<b>5AX337GX3</b>				
80.0	36.3	<b>5X347GX3</b>	75.0	34.0	<b>5AX347GX3</b>				
90.0	40.8	<b>5X357GX3</b>	85.0	38.6	<b>5AX357GX3</b>				
110.0	49.9	<b>5X367GX3</b>	105.0	47.6	<b>5AX367GX3</b>				
125.0	56.7	<b>5X377GX3</b>	120.0	54.4	<b>5AX377GX3</b>				
65.0	29.5	<b>5X517GX3</b>	60.0	27.2	<b>5AX517GX3</b>				
80.0	36.3	<b>5X527GX3</b>	75.0	34.0	<b>5AX527GX3</b>				
85.0	38.6	<b>5X537GX3</b>	80.0	36.3	<b>5AX537GX3</b>				
95.0	43.1	<b>5X547GX3</b>	90.0	40.8	<b>5AX547GX3</b>				
105.0	47.6	<b>5X557GX3</b>	100.0	45.4	<b>5AX557GX3</b>				
115.0	52.2	<b>5X567GX3</b>	110.0	49.9	<b>5AX567GX3</b>				
145.0	65.8	<b>5X577GX3</b>	140.0	63.5	<b>5AX577GX3</b>				

5-Tier Unit with 74" posts (4) Grid (1) Solid Shelves									
Nominal Width/Length (in.)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Starter Unit					
18x24	457x610	56.4	25.6	<b>5X317HX3</b>					
18x36	457x914	74.8	33.9	<b>5X337HX3</b>					
18x48	457x1219	94.5	42.9	<b>5X357HX3</b>					
18x60	457x1524	108.8	49.4	<b>5X367HX3</b>					

**Actual Dimensions:** Width: Add 1/4" (6mm) to nominal size  
Length: Subtract 1/4" (6mm) from nominal size.

5-Tier Unit with 74" posts (4) Grid (1) Solid Shelves									
Nominal Width/Length (in.)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Starter Unit					
24x24	610x610	71.7	32.5	<b>5X517HX3</b>					
24x36	610x914	91.0	41.3	<b>5X537HX3</b>					
24x48	610x1219	111.1	50.4	<b>5X557HX3</b>					
24x60	610x1524	126.6	57.4	<b>5X567HX3</b>					

Needed for Corner (Right Angle) Configurations

## Corner Add-on “S” Hook Kits — {9.10}

For Add-on Units.



x4

Four-tier Corner Unit  
Cat. No. MXCNR4



x5

Five-tier Corner Unit  
Cat. No. MXCNR5

## “S” Hook Kits — {9.25} For individual shelves.



### MetroMax® i “S” Hook Kit

Add on shelving to existing units using two posts instead of four. Kit includes one “S” hook and one corner adapter plug. Two kits required per storage level when configuring units end-to-end.  
Cat. No. M9995



### MetroMax® i Intermediate “S” Hook Kit

Required when joining units at right angles with open corner and no post. Intermediate bracket connects a shelf corner to the front beam of the adjoining shelf. Kit includes one intermediate bracket, two “S” Hooks, and two corner adapter plugs. One required per storage level.  
Cat. No. MX9996



Corner adapter (plug) fits MetroMax i





**Removable**  
wash-machine friendly mats.

PROTECTION THAT LIVES ON  
**MICROBAN**



## MetroMax® 4 Polymer Shelves — {9.22}

Standard Shelves.

- All-polymer shelves with removable 6" (152mm) wide shelf mats.
- Compatible on the same shelving units with MetroMax i and MetroMax Q shelves.
- Part number includes shelf with removable shelf mats and one bag of wedges.

Nominal Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Shelf w/ grid Mats	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Shelf w/ Solid Mats
18x24	457x610	6.3	2.9	MAX4-1824G	6.5	3.0	MAX4-1824F
18x30	457x760	7.4	3.4	MAX4-1830G	7.7	3.5	MAX4-1830F
18x36	457x914	8.8	4.0	MAX4-1836G	9.2	4.2	MAX4-1836F
18x42	457x1060	9.6	4.3	MAX4-1842G	10.0	4.5	MAX4-1842F
18x48	457x1219	10.8	4.9	MAX4-1848G	11.3	5.1	MAX4-1848F
18x54	457x1372	11.7	5.3	MAX4-1854G	12.3	5.6	MAX4-1854F
18x60	457x1524	12.8	5.8	MAX4-1860G	13.5	6.1	MAX4-1860F
21x24	530x610	6.9	3.1	MAX4-2124G	7.2	3.2	MAX4-2124F
21x30	530x760	8.1	3.7	MAX4-2130G	8.5	3.8	MAX4-2130F
21x36	530x914	9.6	4.4	MAX4-2136G	10.1	4.6	MAX4-2136F
21x42	530x1060	10.5	4.8	MAX4-2142G	11.0	5.0	MAX4-2142F
21x48	530x1219	11.9	5.4	MAX4-2148G	12.5	5.7	MAX4-2148F
21x54	530x1372	12.9	5.9	MAX4-2154G	13.6	6.2	MAX4-2154F
21x60	530x1524	14.2	6.4	MAX4-2160G	15.0	6.8	MAX4-2160F
24x24	610x914	7.3	3.3	MAX4-2424G	7.8	3.5	MAX4-2424F
24x30	610x1060	8.8	4.0	MAX4-2430G	9.3	4.2	MAX4-2430F
24x36	610x1219	10.5	4.8	MAX4-2436G	11.0	5.0	MAX4-2436F
24x42	610x1524	11.8	5.4	MAX4-2442G	12.3	5.6	MAX4-2442F
24x48	610x1219	13.1	5.9	MAX4-2448G	13.9	6.3	MAX4-2448F
24x54	610x1372	14.3	6.5	MAX4-2454G	15.4	7.0	MAX4-2454F
24x60	610x1524	15.5	7.0	MAX4-2460G	17.0	7.7	MAX4-2460F

**Actual Dimensions:** Width: Add 1/2" (13mm) to nominal size. Length: Subtract 1/16" (1.6mm) from nominal size.

**Maximum weight capacity evenly distributed:** up to and including 48" (1219mm) long shelf, 600 lbs. (272kg); 54" (1372mm) and larger, 500 lbs. (227kg).

NOTE: For extra heavy loads exceeding 600 lbs. MetroMax i shelves can be added to MetroMax 4 units.

## Polymer Posts

- Corrosionproof with built-in Microban antimicrobial product protection.
- Stationary posts include an adjustable leveling foot to compensate for uneven floors. Leveling foot can be adjusted 1" (25mm).

Nominal Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stationary Post with Leveling Foot	Cat. No. Mobile Post for Stem Caster
9	0.3	0.15	MX9UP
13	0.5	0.2	MX13P
27	0.9	0.4	MX27P
33	1.0	0.5	MX33P
54	1.6	0.7	MX54P
63	1.8	0.8	MX63P
74	2.2	1.0	MX74P
86	3.0	1.4	MX86P


(Special height cut posts are available. Consult your Metro representative.)

NOTE: For maximum rigidity on heavily loaded carts, the steel posts may be used. See page 16 for models.



## MetroMax® 4 Replacement Wedges

Bag of (4)  
Cat. No. MAX4-9985



## Post Clamp

Adds stability by joining posts of two separate units together. With it, each unit is supported by four posts and buttressed by the adjacent unit.  
Cat. No. 9994X





## Foot Plate

Use to add stability to the shelving unit or to bolt units to the floor.  
Cat. No. Zinc 9993Z  
Cat. No. Stainless Steel 9993S

## MetroMax® 4 Shelving Starter and Add-On Units {9.12}

- Starter Units consist of four polymer posts and indicated number of MetroMax 4 shelves.
- Add-On Units consist of two polymer posts, indicated number of shelves, and two “S” Hooks per shelf, for attaching add-on unit to starter unit in an end-to-end configuration. To attach shelves at right angles, Corner “S” Hook Kits must be ordered separately.



- Regular “S” Hook location
- ✕ Intermediate bracket location
- Post
- Post not required

Add-On units with “S” hooks can only be attached to shelves supported by two or more posts.



4-Tier Grid Shelf Unit with 63" posts

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
18x24 457x610	32.5 14.7	<b>X316G4</b>	30.5 13.8	<b>AX316G4</b>
18x30 457x760	36.9 16.7	<b>X326G4</b>	34.9 15.8	<b>AX326G4</b>
18x36 457x914	42.6 19.3	<b>X336G4</b>	40.6 18.4	<b>AX336G4</b>
18x42 457x1060	45.5 20.7	<b>X346G4</b>	43.5 19.8	<b>AX346G4</b>
18x48 457x1219	50.3 22.8	<b>X356G4</b>	48.3 21.9	<b>AX356G4</b>
18x60 457x1524	58.6 26.6	<b>X366G4</b>	56.6 25.7	<b>AX366G4</b>
21x24 530x610	34.8 15.8	<b>X416G4</b>	32.8 14.9	<b>AX416G4</b>
21x30 530x760	39.7 18.0	<b>X426G4</b>	37.7 17.1	<b>AX426G4</b>
21x36 530x914	45.7 20.7	<b>X436G4</b>	43.7 19.8	<b>AX436G4</b>
21x42 530x1060	49.3 22.4	<b>X446G4</b>	47.3 21.5	<b>AX446G4</b>
21x48 530x1219	54.7 24.8	<b>X456G4</b>	52.7 23.9	<b>AX456G4</b>
21x60 530x1524	63.9 29.0	<b>X466G4</b>	61.9 28.1	<b>AX466G4</b>
24x24 610x610	36.4 16.5	<b>X516G4</b>	34.4 15.6	<b>AX516G4</b>
24x30 610x760	42.4 19.2	<b>X526G4</b>	40.4 18.3	<b>AX526G4</b>
24x36 610x914	49.2 22.3	<b>X536G4</b>	47.2 21.4	<b>AX536G4</b>
24x42 610x1060	54.4 24.7	<b>X546G4</b>	52.4 23.8	<b>AX546G4</b>
24x48 610x1219	59.6 27.0	<b>X556G4</b>	57.6 26.1	<b>AX556G4</b>
24x60 610x1524	69.2 31.4	<b>X566G4</b>	67.2 30.5	<b>AX566G4</b>

**Actual Dimensions:** Width: Add 1/2" (13mm) to nominal size. Length: Subtract 1/16" (2mm) from nominal size.

5-Tier Grid Shelf Unit with 74" posts

Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
40.4 18.3	<b>5X317G4</b>	38.0 17.2	<b>5AX317G4</b>
45.9 20.8	<b>5X327G4</b>	43.5 19.7	<b>5AX327G4</b>
53.0 24.1	<b>5X337G4</b>	50.6 23.0	<b>5AX337G4</b>
56.7 25.7	<b>5X347G4</b>	54.3 24.6	<b>5AX347G4</b>
62.7 28.4	<b>5X357G4</b>	60.3 27.4	<b>5AX357G4</b>
73.0 33.1	<b>5X367G4</b>	70.6 32.0	<b>5AX367G4</b>
43.3 19.6	<b>5X417G4</b>	40.9 18.5	<b>5AX417G4</b>
49.4 22.4	<b>5X427G4</b>	47.0 21.3	<b>5AX427G4</b>
56.9 25.8	<b>5X437G4</b>	54.5 24.7	<b>5AX437G4</b>
61.4 27.9	<b>5X447G4</b>	59.0 26.8	<b>5AX447G4</b>
68.2 30.9	<b>5X457G4</b>	65.8 29.8	<b>5AX457G4</b>
79.7 36.1	<b>5X467G4</b>	77.3 35.0	<b>5AX467G4</b>
45.3 20.5	<b>5X517G4</b>	42.9 19.5	<b>5AX517G4</b>
52.8 23.9	<b>5X527G4</b>	50.4 22.9	<b>5AX527G4</b>
61.3 27.8	<b>5X537G4</b>	58.9 26.7	<b>5AX537G4</b>
67.8 30.8	<b>5X547G4</b>	65.4 29.7	<b>5AX547G4</b>
74.3 33.7	<b>5X557G4</b>	71.9 32.6	<b>5AX557G4</b>
86.3 39.1	<b>5X567G4</b>	83.9 38.1	<b>5AX567G4</b>

5-Tier Unit with 74" posts (4) Grid (1) Solid Shelves

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit
18x24 457x610	40.6 18.4	<b>5X317H4</b>
18x36 457x914	53.4 24.2	<b>5X337H4</b>
18x48 457x1219	63.2 28.7	<b>5X357H4</b>
18x60 457x1524	73.7 33.4	<b>5X367H4</b>

**Actual Dimensions:** Width: Add 1/2" (13mm) to nominal size. Length: Subtract 1/16" (2mm) from nominal size.

5-Tier Unit with 74" posts (4) Grid (1) Solid Shelves

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit
24x24 610x610	45.8 20.8	<b>5X517H4</b>
24x36 610x914	61.8 28.0	<b>5X537H4</b>
24x48 610x1219	75.1 34.1	<b>5X557H4</b>
24x60 610x1524	87.8 39.8	<b>5X567H4</b>

Needed for Corner (Right Angle) Configurations

## Corner Add-on “S” Hook Kits — {9.12}

For Add-on Units.



Four-tier Corner Unit  
Cat. No. MAX4-CNR4



Five-tier Corner Unit  
Cat. No. MAX4-CNR5

## “S” Hook Kits — {9.25} For individual shelves.



Intermediate “S” Hook Kit

### MetroMax® 4 Intermediate “S” Hook Kit

Required when joining units at right angles with open corner and no post. Kit includes one intermediate bracket, one “S” Hooks, and two corner adapter plugs.  
Cat. No. MAX4-9996



Standard “S” Hook Kit

### MetroMax® 4 “S” Hook Kit

Kit includes one “S” hook and one corner adapter plug. Two kits required per storage level when configuring units end-to-end.  
Cat. No. MAX4-9995



## MetroMax® Q Shelving —{9.21} Standard Shelves

- Part number includes shelf with removable mats and one bag of wedges.

		Nominal		Length		Approx. Pkd. Wt.		Cat. No. Shelf with Grid Mats
Width (in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	
18	457	24	610	6.2	2.8			MQ1824G
18	457	30	760	8.0	3.6			MQ1830G
18	457	36	914	9.7	4.4			MQ1836G
18	457	42	1060	11.4	5.2			MQ1842G
18	457	48	1219	13.2	6.0			MQ1848G
18	457	54	1372	15.0	6.8			MQ1854G
18	457	60	1524	16.7	7.6			MQ1860G
18	457	72	1829	20.0	9.1			MQ1872G
21	530	24	610	8.0	3.6			MQ2124G
21	530	30	760	9.7	4.4			MQ2130G
21	530	36	914	11.4	5.2			MQ2136G
21	530	42	1060	12.8	5.8			MQ2142G
21	530	48	1219	14.5	6.6			MQ2148G
21	530	54	1372	16.7	7.6			MQ2154G
21	530	60	1524	18.5	8.4			MQ2160G
21	530	72	1829	21.7	9.9			MQ2172G
24	610	24	610	9.7	4.4			MQ2424G
24	610	30	760	11.4	5.2			MQ2430G
24	610	36	914	13.1	6.0			MQ2436G
24	610	42	1060	14.1	6.4			MQ2442G
24	610	48	1219	15.8	7.1			MQ2448G
24	610	54	1372	18.5	8.4			MQ2454G
24	610	60	1524	20.3	9.2			MQ2460G
24	610	72	1829	23.5	10.7			MQ2472G

**Actual Dimensions:** Width: Add 3/8" (10mm) to nominal size.

Length: Subtract 3/16" (5mm) from nominal size.

**Maximum weight capacity evenly distributed:** Up to and including 48" (1220mm) long shelf, 800 lbs. (363kg); 54" (1372mm) and longer, 600 lbs. (272kg).

**NOTE:** The current MetroMax® Q shelves with the blue S-hook plugs have different actual measurements than original MetroMax Q shelves manufactured in March 2009 and earlier and cannot be mixed on the same shelving units.

**Removable**  
wash-machine friendly mats.



**1"** Shelves  
adjust at 1"  
increments.  
(25mm)

## Posts

- Epoxycoated steel and polymer posts have Microban antimicrobial product protection.
- Stationary posts include an adjustable leveling foot to compensate for uneven floors. Leveling foot can be adjusted 1" (25mm).
- When mounting a shelving unit to a dolly base, stationary posts are used.

STEEL				POLYMER			
Nominal Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stationary Post with Leveling Foot	Cat. No. Mobile Post for Stem Caster	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stationary Post with Leveling Foot	Cat. No. Mobile Post for Stem Caster	
9 228	0.3 0.15	—	—		—	MX9UP	
13 370	1.0 0.5	MQ13PE	MQ13UPE	0.5 0.2	MX13P	MX13UP	
27 685	2.0 0.9	MQ27PE	MQ27UPE	0.9 0.4	MX27P	MX27UP	
33 875	2.5 1.1	MQ33PE	MQ33UPE	1.0 0.5	MX33P	MX33UP	
54 1370	4.0 1.8	MQ54PE	MQ54UPE	1.6 0.7	MX54P	MX54UP	
63 1585	4.5 2.0	MQ63PE	MQ63UPE	1.8 0.8	MX63P	MX63UP	
70 1778	5.0 2.3	—	MQ70UPE		—	—	
74 1890	5.5 2.5	MQ74PE	MQ74UPE	2.2 1.0	MX74P	MX74UP	
86 2195	6.5 2.9	MQ86PE	MQ86UPE	3.0 1.4	MX86P	MX86UP	

(Special height cut posts are available. Consult your Metro representative.)



## MetroMax® Q Replacement Wedges



Bag of (4)  
Cat. No. MQ9985

MetroMax® Q Wedges are compatible with original MetroMax Q shelves and posts.



## MetroMax® Q Shelving Starter and Add-On Units —{9.11}

- Starter Units consist of four epoxy-coated steel posts and indicated number of MetroMax Q shelves.
- Add-On Units consist of two epoxy-coated steel posts, indicated number of shelves, and two "S" Hooks per shelf, for attaching shelf to adjacent unit in an end-to-end configuration. To attach shelves at right angles, Intermediate "S" Hook Kits must be ordered separately.



- Regular "S" Hook location
- ✕ Intermediate bracket location
- Post
- Post not required

Add-On units with "S" hooks can only be attached to shelves supported by two or more posts.



4-Tier Unit with 63" posts

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
18x24 457x610	41.5 18.8	<b>Q316G3</b>	32.5 14.7	<b>AQ316G3</b>
18x30 457x760	47.5 21.5	<b>Q326G3</b>	34.5 15.6	<b>AQ326G3</b>
18x36 457x914	53.5 24.3	<b>Q336G3</b>	40.5 18.4	<b>AQ336G3</b>
18x42 457x1060	59.5 27.0	<b>Q346G3</b>	46.5 21.1	<b>AQ346G3</b>
18x48 457x1219	65.5 29.7	<b>Q356G3</b>	65.2 29.6	<b>AQ356G3</b>
18x60 457x1524	53.5 24.3	<b>Q366G3</b>	64.5 29.3	<b>AQ366G3</b>
18x72 457x1829	89.5 40.6	<b>Q376G3</b>	86.5 39.2	<b>AQ376G3</b>
21x24 530x610	46.3 21.0	<b>Q416G3</b>	34.3 15.6	<b>AQ416G3</b>
21x30 530x760	52.3 23.7	<b>Q426G3</b>	39.3 17.8	<b>AQ426G3</b>
21x36 530x914	57.9 26.3	<b>Q436G3</b>	44.9 20.4	<b>AQ436G3</b>
21x42 530x1060	67.1 30.4	<b>Q446G3</b>	54.1 24.5	<b>AQ446G3</b>
21x48 530x1219	72.7 33.0	<b>Q456G3</b>	59.7 27.1	<b>AQ456G3</b>
21x60 530x1524	86.3 39.1	<b>Q466G3</b>	73.3 33.2	<b>AQ466G3</b>
21x72 530x1829	98.3 44.6	<b>Q476G3</b>	85.3 38.7	<b>AQ476G3</b>
24x24 610x610	49.5 22.5	<b>Q516G3</b>	36.5 16.6	<b>AQ516G3</b>
24x30 610x760	57.5 26.1	<b>Q526G3</b>	44.5 20.2	<b>AQ526G3</b>
24x36 610x914	65.5 29.7	<b>Q536G3</b>	52.5 23.8	<b>AQ536G3</b>
24x42 610x1060	73.5 33.3	<b>Q546G3</b>	60.5 27.4	<b>AQ546G3</b>
24x48 610x1219	81.5 37.0	<b>Q556G3</b>	68.5 31.1	<b>AQ556G3</b>
24x60 610x1524	77.5 35.2	<b>Q566G3</b>	84.5 38.3	<b>AQ566G3</b>
24x72 610x1829	113.5 51.5	<b>Q576G3</b>	100.5 45.6	<b>AQ576G3</b>

**Actual Dimensions:** Width: Add 3/8" (10mm) to nominal size. Length: Subtract 3/16" (5mm) from nominal size.

5-Tier Unit with 74" posts

Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
50.4 22.9	<b>5Q317G3</b>	40.4 18.3	<b>5AQ317G3</b>
57.9 26.3	<b>5Q327G3</b>	47.9 21.7	<b>5AQ327G3</b>
65.4 29.7	<b>5Q337G3</b>	55.4 25.1	<b>5AQ337G3</b>
72.9 33.1	<b>5Q347G3</b>	62.9 28.5	<b>5AQ347G3</b>
80.4 36.5	<b>5Q357G3</b>	70.4 31.9	<b>5AQ357G3</b>
95.4 43.3	<b>5Q367G3</b>	85.4 38.7	<b>5AQ367G3</b>
110.4 50.1	<b>5Q377G3</b>	100.4 45.5	<b>5AQ377G3</b>
56.4 25.6	<b>5Q417G3</b>	46.4 21.0	<b>5AQ417G3</b>
63.1 28.6	<b>5Q427G3</b>	53.1 24.1	<b>5AQ427G3</b>
70.9 32.2	<b>5Q437G3</b>	60.9 27.6	<b>5AQ437G3</b>
82.1 37.2	<b>5Q447G3</b>	72.1 32.7	<b>5AQ447G3</b>
89.4 40.5	<b>5Q457G3</b>	79.4 36.0	<b>5AQ457G3</b>
106.4 48.3	<b>5Q467G3</b>	96.4 43.7	<b>5AQ467G3</b>
121.4 55.1	<b>5Q477G3</b>	111.4 50.5	<b>5AQ477G3</b>
56.4 25.6	<b>5Q517G3</b>	46.4 21.0	<b>5AQ517G3</b>
66.4 30.1	<b>5Q527G3</b>	56.4 25.6	<b>5AQ527G3</b>
76.4 34.7	<b>5Q537G3</b>	65.4 29.7	<b>5AQ537G3</b>
86.4 39.2	<b>5Q547G3</b>	75.4 34.2	<b>5AQ547G3</b>
96.4 43.7	<b>5Q557G3</b>	85.4 38.7	<b>5AQ557G3</b>
116.4 52.8	<b>5Q567G3</b>	106.4 48.3	<b>5AQ567G3</b>
136.4 61.9	<b>5Q577G3</b>	126.4 57.3	<b>5AQ577G3</b>



To attach shelves at right angles, one Intermediate "S" Hook Kit needed per shelf.

Intermediate "S"  
Hook Kit  
Cat. No. Q9995Z

## "S" Hook Kits —For individual shelves.



"S" Hook  
Cat. No. M9995

### MetroMax® Q "S" Hook Kit —{9.25}

Add on shelving using two posts instead of four. Includes one "S" hook. Two kits required per level when configuring units end-to-end. Cat. No. M9995

**Note:** Collar/hole plug is designed for use with MetroMax i shelves only.



Intermediate "S"  
Hook Kit  
Cat. No. Q9995Z

### MetroMax® Q Intermediate "S" Hook Kit

Use when configuring MetroMax Q Starter and Add-On Units at right angles.

Cat. No. Q9995Z

# Go mobile.

Add casters to any shelving unit to add versatility.

## MetroMax® Stem Casters — {9.25}

For use with either polymer or steel stem caster posts.

- Promotes easy cleaning. Casters allow shelving units to be moved easily for access to floors and walls.
- Efficient Transport: Create a cart to efficiently move supplies throughout a facility or campus.



5PCX



5PCBX



5MPX

Rigid stem casters are often ordered two per unit for improved tracking and handling. Rigid caster channels are provided with each two rigid stem casters at no charge.



## Polymer Stem Casters — {9.25}

Innovative polymer stem casters offer corrosion resistance and enhanced durability. Appropriate for all medium-duty mobile applications. Bumpers included.

- All-polymer horn, stainless axle, and hardware.
- 5" (127mm) diameter polyurethane, flat wheel tread.
- Sleeve style axle bearing and optional toe-operated brake mechanism

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.	Cat. No. Antimicrobial
5 127	1 1/4 32	300 135	Stem/Swivel	-20°-120° -29°-49°	2 0.9	5PCX	5PCXM
5 127	1 1/4 32	300 135	Stem/Brake	-20°-120° -29°-49°	2 0.9	5PCBX	5PCBXM
5 127	1 1/4 32	300 135	Stem/Rigid*	-20°-120° -29°-49°	2 0.9	5PCRX	—

\*Note 1: Rigid casters are held in place by a connecting channel. When ordering, shelf width must be provided. Rigid connecting channel (aluminum) for 5PCRX caster: Cat. No. P18RC, P21RC, P24RC.

Note 2: Not suitable for cart wash and autoclave applications.

## Standard Stem Casters — {9.25}

- Plated caster horns and hardware. Bumper included with each caster.
- Swivel, Swivel with Brakes, and Rigid Caster options available.

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Wheel Tread	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
5 127	1 1/4 32	200 90	Stem/Swivel	Resilient, Flat	-30°-160° -34°-71°	2 1/2 1.1	5MX
5 127	1 1/4 32	200 90	Stem/Brake	Resilient, Flat	-30°-160° -34°-71°	2 5/8 1.2	5MBX
5 127	1 1/4 32	200 90	Stem/Rigid*	Resilient, Flat	-30°-160° -34°-71°	3 1/2 1.5	5MRX
5 127	1 1/4 32	250 113	Stem/Swivel	High Modulus Donut	-40°-180° -40°-82°	2 1/2 1.1	5MDXA
5 127	1 1/4 32	250 113	Stem/Brake	High Modulus Donut	-40°-180° -40°-82°	2 5/8 1.2	5MDBXA
5 127	1 1/4 32	250 113	Stem/Rigid*	High Modulus Donut	-40°-180° -40°-82°	2 3/8 1.1	5MDRXA
5 127	1 1/4 32	300 135	Stem/Swivel	Polyurethane, Flat	-30°-180° -34°-82°	2 1/8 0.9	5MPX
5 127	1 1/4 32	300 135	Stem/Brake	Polyurethane, Flat	-30°-180° -34°-82°	2 1/4 1	5MPBX
5 127	1 1/4 32	300 135	Stem/Rigid*	Polyurethane, Flat	-30°-180° -34°-82°	2 0.9	5MPRX

\*Note: Rigid casters are held in place by a connecting channel. When ordering, shelf width must be provided. Rigid connecting channel (stainless steel): Cat. No. 18RS, 21RS, or 24RS.

## Stainless Steel Cart-Washable Stem Casters — {9.25}


- Stainless horn, axle, and stem with sealed bearings. Bumper included with each caster.

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Wheel Tread	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
5 127	1 1/4 32	300 135	Stem/Swivel	Polyurethane, Flat	-30°-180° -34°-82°	2 1/8 0.9	5MPXGSA
5 127	1 1/4 32	300 135	Stem/Brake	Polyurethane, Flat	-30°-180° -34°-82°	2 1/4 1	5MPBXGSA
5 127	1 1/4 32	300 135	Stem/Rigid*	Polyurethane, Flat	-30°-180° -34°-82°	2 0.9	5MPRXGSA

\*Note: Rigid casters are held in place by a connecting channel. When ordering, shelf width must be provided. Rigid connecting channel (stainless steel): Cat. No. 18RS, 21RS, or 24RS.

## Replacement Bumper — tri-lobal polymer or steel post.

Cat. No. M9992DBX

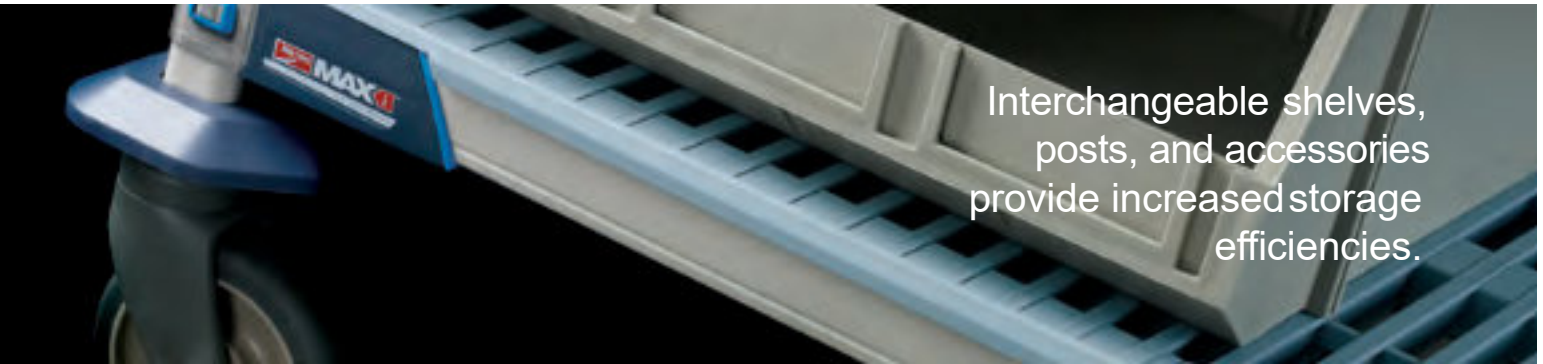

Interchangeable shelves, posts, and accessories provide increased storage efficiencies.

# Handle it.

Adding stainlesssteel handles to shelving puts you in control.

- Use handles on mobile units to improve maneuverability and ergonomics.
- Handles are compatible with MetroMax® i, MetroMax® 4, and MetroMax® Q units.
- Corrosion proof Type 304 stainlesssteel construction offers long lasting performance.



Tri-Lobal Adapters  
Included with handles.

## Tri-Lobal Adapter Replacements

Cat. No. MTLA  
Bag of 4 assemblies

MTLA adapters are designed to work with MetroMax i, MetroMax 4, and MetroMax Q and are not compatible with original MetroMax.

Extended and Easy-Grip Handles are compatible with original MetroMax Q shelves.

## Extended Handle — {9.25}

Fits Shelf Depth (in.) (mm)		Extension Depth (Post to Edge of Handle) (in.) (mm)		Approx. Pkd. Wt (lbs.) (kg)		i, 4, and Q Cat. No.
18	457	4.5	113	2.5	1.1	MEH18S
24	610	4.5	113	2.8	1.3	MEH24S

NOTE: Stainless steel fasteners are provided with each handle to secure the handle to the post for heavier duty applications




## Easy-Grip Handle — {9.25}

Fits Shelf Depth (in.) (mm)		Extension Depth (Post to Edge of Handle) (in.) (mm)		Approx. Pkd. Wt (lbs.) (kg)		i, 4, and Q Cat. No.
18	457	6	151	2.5	1.1	MERGH18S
24	610	6	151	3.0	1.4	MERGH24S

NOTE: Stainless steel fasteners are provided with each handle to secure the handle to the post for heavier duty applications





MetroMax® i  
4-Tier with Open Grid  
or Solid Shelves



MetroMax® i  
5-Tier with Solid Bottom Shelf

### MetroMax® i —Stem Caster Carts —{9.13}

- Corrosion proof shelves and posts; removable polymer mats.
- 4-Tier Units consist of four shelves, MX63UP posts 63" (1600mm), wedge connectors and choice of resilient rubber or polyurethane casters.
- 5-Tier Units consist of 5 shelves (4 open grid, 1 MetroMax i solid), 74" (1880mm) posts, wedge connectors, and polyurethane casters.
- Weight Capacity of cart: models with resilient rubber casters: 600 lbs. (272kg); models with polyurethane casters: 900 lbs. (408kg)



#### 4-Tier Open Grid Mats —Unit Height 67 5/16 (1710mm)

Nominal Width/Length (in.)		Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. 2-Swivel, 2-Brake Resilient Rubber Casters	Cat. No. 2-Swivel, 2-Brake Polyurethane Casters
18x36	457x914	74	33	<b>X336BGX3</b>	<b>X336EGX3</b>
18x48	457x1219	86	38	<b>X356BGX3</b>	<b>X356EGX3</b>
18x60	457x1524	98	44	<b>X366BGX3</b>	<b>X366EGX3</b>
24x36	610x914	82	37	<b>X536BGX3</b>	<b>X536EGX3</b>
24x48	610x1219	98	44	<b>X556BGX3</b>	<b>X556EGX3</b>
24x60	610x1524	114	51	<b>X566BGX3</b>	<b>X566EGX3</b>

#### Solid Mats

Unit Height 67 5/16 (1710mm)

Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. 2-Swivel, 2-Brake Polyurethane Casters
94	42	<b>X336EFX3</b>
106	48	<b>X356EFX3</b>
118	53	<b>X366EFX3</b>
102	46	<b>X536EFX3</b>
118	53	<b>X556EFX3</b>
134	60	<b>X566EFX3</b>

#### 5-Tier Solid Bottom

Unit Height 79 5/16 (2015mm)

Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. 2-Swivel, 2-Brake Polyurethane Casters
82	37	<b>5X337EGX3</b>
109	49	<b>5X357EGX3</b>
121	55	<b>5X367EGX3</b>
102	46	<b>5X537EGX3</b>
123	56	<b>5X557EGX3</b>
141	63	<b>5X567EGX3</b>



MetroMax® 4  
5-Tier with Open Grid and  
Bottom Solid Shelf



MetroMax® 4  
4-Tier with Open Grid Shelves

### MetroMax® 4 —Stem Caster Carts —{9.15}

- Corrosion proof shelves and posts; removable polymer mats.
- 4-Tier Units consist of four shelves, MX63UP posts 63" (1600mm), wedge connectors and polyurethane casters with polymer horns.
- Weight Capacity of cart: models with polyurethane casters: 750 lbs. (340kg)



#### 4-Tier Open Grid Mats

Unit Height 67 5/16 (1710mm)

Nominal Width/Length (in.)		Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. 2-Swivel, 2-Brake Polyurethane Casters
18x36	457x914	50.6	22.9	<b>X336PG4</b>
18x48	457x1219	58.3	26.5	<b>X356PG4</b>
18x60	457x1524	66.6	30.2	<b>X366PG4</b>
24x36	610x914	57.2	25.9	<b>X536PG4</b>
24x48	610x1219	67.6	30.7	<b>X556PG4</b>
24x60	610x1524	77.2	35.0	<b>X566PG4</b>

#### 5-Tier w/ Solid Bottom

Unit Height 79 5/16 (2015mm)

Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. 2-Swivel, 2-Brake Polyurethane Casters
61.0	27.7	<b>5X337PG4</b>
70.7	32.1	<b>5X357PG4</b>
81.0	36.8	<b>5X367PG4</b>
69.3	31.4	<b>5X537PG4</b>
82.3	37.3	<b>5X557PG4</b>
94.3	42.8	<b>5X567PG4</b>





MetroMax® Q  
4-Tier with Open Grid  
(5-Tier available)

## MetroMax® Q —Stem Caster Cart, Open Grid Shelves—{9.14}

- Quick adjust shelves with removable polymer shelf mats.
- 4-Tier Units consist of four open grid shelves, MQ63UPE posts 63" (1600mm), wedge connectors, and choice of resilient rubber or polyurethane casters.
- 5-Tier Units consist of 5 shelves, 74" (1880mm) posts, wedge connectors, and choice of resilient rubber or polyurethane casters.
- Weight Capacity of cart: models with resilient rubber casters: 600 lbs. (272kg); models with polyurethane casters: 900 lbs. (408kg)



### 4-Tier Open Grid Mats —Unit Height 67 5/16 (1710mm)

Nominal Width/Length (in.)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. 2-Swivel, 2-Brake Resilient Rubber Casters	Cat. No. 2-Swivel, 2-Brake Polyurethane Casters
18x36	457x914	68	31	<b>Q336BG3</b>	<b>Q336EG3</b>
18x48	457x1219	84	38	<b>Q356BG3</b>	<b>Q356EG3</b>
18x60	457x1524	100	45	<b>Q366BG3</b>	<b>Q366EG3</b>
21x36	530x914	74	34	<b>Q436BG3</b>	<b>Q436EG3</b>
21x48	530x1219	90	41	<b>Q456BG3</b>	<b>Q456EG3</b>
21x60	530x1524	106	48	<b>Q466BG3</b>	<b>Q466EG3</b>
24x36	610x914	80	36	<b>Q536BG3</b>	<b>Q536EG3</b>
24x48	610x1219	96	44	<b>Q556BG3</b>	<b>Q556EG3</b>
24x60	610x1524	112	51	<b>Q566BG3</b>	<b>Q566EG3</b>

### 5-Tier Open Grid Mats Unit Height 79 5/16 (2015mm)

Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. 2-Swivel, 2-Brake Polyurethane Casters
85	39	<b>5Q337EG3</b>
111	50	<b>5Q357EG3</b>
123	56	<b>5Q367EG3</b>
-	-	-
-	-	-
-	-	-
104	47	<b>5Q537EG3</b>
125	57	<b>5Q557EG3</b>
144	65	<b>5Q567EG3</b>



Solid bottom shelf and 5PCX/5PCBX casters

## MetroMax® i —Utility Carts

- Corrosion proof shelves, posts, and Type 304 stainless steel handle.
- Corrosion resistant 5PCX casters with 5" (127mm) polyurethane wheels, polymer horns, and stainless steel axles.
- 39 1/4" (997mm) tall. Weight capacity of cart: 900 lbs. (408kg) evenly distributed.

Nominal Width/Length (in.)	Nominal Width/Length (mm)	Actual Width/Length (in.)	Actual Width/Length (mm)	Description	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
18x30	457x760	20 5/16 x 34 1/2	516 x 876	2-shelf	35.5	15.8	<b>MXUC1830G-25</b>
24x36	610x914	26 5/16 x 40 1/2	668 x 1029	2-shelf	46.0	20.5	<b>MXUC2436G-25</b>
18x30	457x760	20 5/16 x 34 1/2	516 x 876	3-shelf	46.0	20.5	<b>MXUC1830G-35</b>
24x36	610x914	26 5/16 x 40 1/2	668 x 1029	3-shelf	61.5	27.5	<b>MXUC2436G-35</b>



## MetroMax® Q —Utility Carts

- Quick adjust corrosion resistant shelves and posts.
- Corrosion proof Type 304 stainless steel handle.
- Includes four 5MPX casters with 5" (127mm) polyurethane wheels.
- 39 1/4" (997mm) tall. Weight capacity of cart: 900 lbs. (408kg) evenly distributed.

Nominal Width/Length (in.)	Nominal Width/Length (mm)	Actual Width/Length (in.)	Actual Width/Length (mm)	Description	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
18x30	457x760	20 5/16 x 34 1/2	516 x 876	2-shelf	35.5	15.8	<b>MQUC1830G-25</b>
24x36	610x914	26 5/16 x 40 1/2	668 x 1029	2-shelf	46.0	20.5	<b>MQUC2436G-25</b>
18x30	457x760	20 5/16 x 34 1/2	516 x 876	3-shelf	46.0	20.5	<b>MQUC1830G-35</b>
24x36	610x914	26 5/16 x 40 1/2	668 x 1029	3-shelf	61.5	27.5	<b>MQUC2436G-35</b>






# Organize.

Organize supplies to improve operational efficiencies.

- Well-organized storage results in fewer expired supplies and less waste.
- Innovative shelf and accessory designs have smooth surfaces that protect vacuum sealed and other packaged items from damage.
- Flexible compartments help sort supplies for faster access and maximize the use of storage space.


**A** Dividers **B** Ledges **C** Enclosure Panels **D** Metro Totes **E** Metro Bins

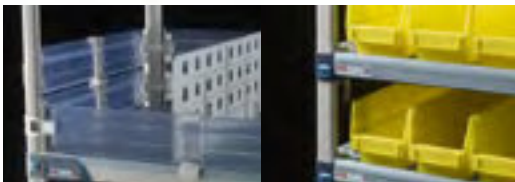

## Flexible Compartments

Dividers and Ledges can be used to create flexible compartments that most efficiently use available storage space. When combined with open grid shelves this minimizes dust accumulation.

Bins offer removable compartmentalized storage for easy access or as part of an exchange system. See page 72 for Bin options.




## 8" (203mm) Shelf Dividers — Standard Duty — {9.25}

- Used to create organized compartments or to simply separate shelf contents.
- Easily repositioned on grid and solid shelves.
- Corrosion proof: Polymer (High-Density Polypropylene).
- Three-piece design — Ships assembled.

Nominal Length (in.) (mm)		i Cat. No.	4 Cat. No.	Q Cat. No.
18	457	MXD18-8	MAX4-D18-8	MQD18-8
24	610	MXD24-8	MAX4-D24-8	MQD24-8

\*Note: Can be retrofitted to original MetroMax and MetroMax Q.



## Universal 8" (203mm) Shelf Dividers — Light Duty, for open grid shelves — {9.25}

- For use with grid shelves (MetroMax i, MetroMax 4, MetroMax Q, and Super Erecta Pro), Super Erecta wire shelves, and Super Adjustable wire shelves.
- Easiest divider to install.
- Maximum flexibility: Can be repositioned along the entire shelf.
- Each divider includes a panel and two clips to connect to any open grid or wire shelf. Does not attach to solid shelves.
- Corrosion proof.

Nominal Length (in.) (mm)		Fits Shelf Depth	Approx Pkd. Wt. (lbs.) (kg)		i, 4, and Q Cat. No.
18	457	18", 21" (457, 530mm)	1.3	0.6	MUD18-8
24	610	24" (610mm)	1.6	0.7	MUD24-8

\*Note: Can be retrofitted to original MetroMax and MetroMax Q.  
Additional clips: Cat. No DCLIP, 2 per bag.

## Shelf-to-Shelf Dividers — {9.25}

- Full height dividers efficiently compartmentalize the space between two shelves.
- Smooth surfaces protect packaged items from damage.
- Corrosion proof.
- Compatible with open grid polymer shelves, Super Erecta wire shelves, and Super Adjustable wire shelves. Does not work with solid shelves.

Fits Shelf Depth (in.) (mm)		Nominal Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		i, 4, and Q Cat. No.
18, 21	457, 530	16	406	2.3	1.0	MD18-16
18, 21	457, 530	20	508	2.5	1.1	MD18-20
18, 21	457, 530	24	610	3.8	1.7	MD18-24
24	610	16	406	2.8	1.2	MD24-16
24	610	20	508	3.0	1.3	MD24-20
24	610	24	610	4.4	2.0	MD24-24

\*Note: Can be retrofitted to original MetroMax and MetroMax Q shelves.

\*Note: -16 parts have three panels, -20 parts have four panels, -24 parts have five panels.



## 2" (51mm) Stackable Shelf Ledges — {9.25}

- Prevent items from falling off shelves.
- Snap on and off quickly. Easily stacked to contain larger items.
- Corrosion proof: Polymer (High-Density Polypropylene) and Type 304 stainless steel.
- Ships assembled.

Nominal Length (in.) (mm)		Type	i Cat. No.	4 Cat. No.	Q Cat. No.
18	457	Side	MXLS18-2S	MAX4-LS18-2S	MQLS18-2S
21	530	Side	—	MAX4-LS21-2S	MQLS21-2S
24	610	Side	MXLS24-2S	MAX4-LS24-2S	MQLS24-2S
24	610	Back	MXL24-2S	MAX4-L24-2S	MQL24-2S
30	760	Back	MXL30-2S	MAX4-L30-2S	MQL30-2S
36	914	Back	MXL36-2S	MAX4-L36-2S	MQL36-2S
42	1066	Back	MXL42-2S	MAX4-L42-2S	MQL42-2S
48	1219	Back	MXL48-2S	MAX4-L48-2S	MQL48-2S
54	1370	Back	MXL54-2S	MAX4-L54-2S	MQL54-2S
60	1524	Back	MXL60-2S	MAX4-L60-2S	MQL60-2S
72	1829	Back	MXL72-2S	—	MQL72-2S

\*Note: MetroMax i wire ledges can be retrofitted to original MetroMax.

\*Note: MetroMax Q wire ledges (MQ-) cannot be retrofitted to original MetroMax Q.



## 4" (102mm) Solid Clear Stackable Shelf Ledges — {9.26}

- Solid design helps contain small items.
- Clear plastic allows light penetration and visible access to supplies.
- Corrosion proof.
- Ships assembled.

Nominal Length (in.) (mm)		Type	Approx. Pkd. Wt. (lbs.) (kg)		i Cat. No.	4 Cat. No.
18	457	Side	0.50	0.2	MXLS18-4P	MAX4-LS18-4P
24	610	Side	0.50	0.2	MXLS24-4P	MAX4-LS24-4P
24	610	Back	0.50	0.2	MXL24-4P	MAX4-L24-4P
36	914	Back	1.00	0.4	MXL36-4P	MAX4-L36-4P
48	1219	Back	1.25	0.6	MXL48-4P	MAX4-L48-4P
60	1524	Back	1.75	0.8	MXL60-4P	MAX4-L60-4P

Note: Not suitable for cart-wash applications.





# Contain it.

Efficiently enclose and contain  
with Enclosure Panels.

## Enclosure Panels — {9.25}

- An efficient way of enclosing the sides and back of all shelves in a unit to contain stored contents.
- Slot opening: 3" W x 3<sup>7</sup>/<sub>8</sub>" H.
- Designed to work with MetroMax® i, MetroMax® 4, and MetroMax® Q shelves. Mounting clips included.

Use shelf to shelf  
dividers with enclosure  
panels to create full  
height compartments  
to organize bulky,  
hard-to-handle supplies.

Actual Width/Height (in.) (mm)		Post Height (in.) (mm)		For use with Shelf Width (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		i, 4, and Q Cat. No.
12 <sup>3</sup> / <sub>8</sub> x 51 <sup>1</sup> / <sub>4</sub>	315 x 1300	54	1370	18	457	6 <sup>1</sup> / <sub>4</sub>	2.8	MEP35E
12 <sup>3</sup> / <sub>8</sub> x 59 <sup>1</sup> / <sub>4</sub>	315 x 1505	63	1600	18	457	7	3.2	MEP36E
12 <sup>3</sup> / <sub>8</sub> x 71 <sup>1</sup> / <sub>4</sub>	315 x 1810	74	1880	18	457	8 <sup>3</sup> / <sub>4</sub>	4.0	MEP37E
18 <sup>3</sup> / <sub>8</sub> x 51 <sup>1</sup> / <sub>4</sub>	467 x 1300	54	1370	21, 24	530, 610	9	4.1	MEP55E
18 <sup>3</sup> / <sub>8</sub> x 59 <sup>1</sup> / <sub>4</sub>	467 x 1505	63	1600	21, 24	530, 610	10 <sup>1</sup> / <sub>4</sub>	4.7	MEP56E
18 <sup>3</sup> / <sub>8</sub> x 71 <sup>1</sup> / <sub>4</sub>	467 x 1810	74	1880	21, 24	530, 610	11 <sup>3</sup> / <sub>4</sub>	5.3	MEP57E

\*Note: Can be retrofitted to original MetroMax and MetroMax Q shelving.

Panels Required to Enclose Both Ends of the Shelving Unit or Cart

Post Height	Shelf Width		
	18" (457mm)	21" (530mm)	24" (610mm)
54" (1370mm)	(2) MEP35E	(2) MEP55E	(2) MEP55E
63" (1600mm)	(2) MEP36E	(2) MEP56E	(2) MEP56E
74" (1880mm)	(2) MEP37E	(2) MEP57E	(2) MEP57E

## Configuration Notes

1. Handles and enclosure panels can be used on the same end of the cart. Please note the following details: 21" (530mm) wide units: use the 12<sup>3</sup>/<sub>8</sub>" (315mm) wide panel on the same end as the handle.
2. Top-Track: When using on the ends of a Top-Track mobile unit the enclosure panel must be mounted so that it does not interfere with the overhead tracks. Mobile posts on Top-Track are 74" (1880mm). The standard panels for a 63" post are recommended.

Panels Required to Enclose Back of Shelving Unit or Cart

Post Height	Shelf Length						
	30" (760mm)	36" (914mm)	42" (1066mm)	48" (1219mm)	54" (1370mm)	60" (1524mm)	72" (1825mm)
54" (1370mm)	(2) MEP35E	(1) MEP55E	(2) MEP55E	(2) MEP35E	(1) MEP35E	(3) MEP55E	(1) MEP35E
63" (1600mm)	(2) MEP36E	(1) MEP36E	(2) MEP56E	(2) MEP36E	(1) MEP36E	(3) MEP56E	(1) MEP36E
74" (1880mm)	(2) MEP37E	(1) MEP37E	(2) MEP57E	(2) MEP37E	(1) MEP37E	(3) MEP57E	(1) MEP37E



## MetroMax® i Mounting Clip Replacements

Bag of 8  
Cat. No. RPMX3-RODTAB



## MetroMax® 4 Mounting Clip Replacements

Bag of 8  
Cat. No. RPMX4-RODTAB




## MetroMax® Q Mounting and Bottom Adapter Clip Replacements

Bag of 8  
Cat. No. RPMQ3-RODTAB



Enclosure Panel



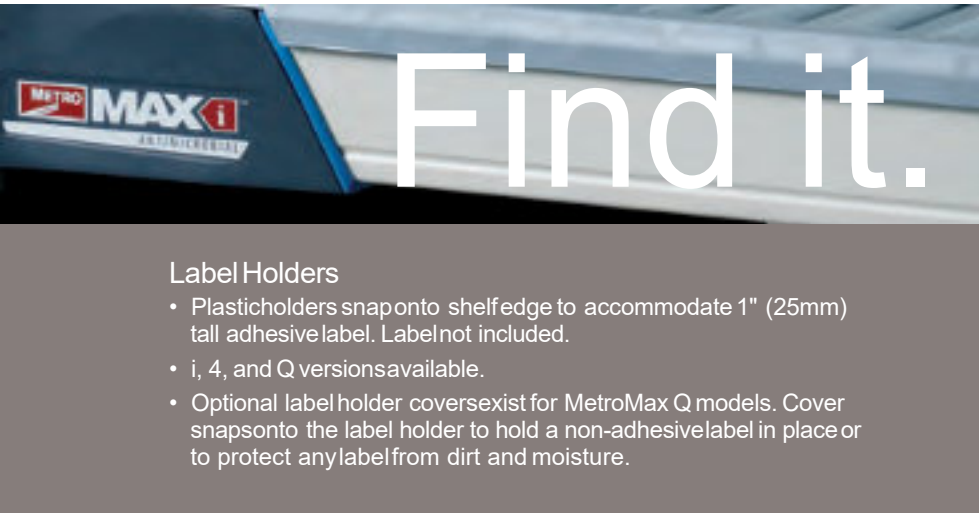

### Label Holders

- Plastic holders snap onto shelf edge to accommodate 1" (25mm) tall adhesive label. Label not included.
- i, 4, and Q versions available.
- Optional label holder cover exists for MetroMax Q models. Cover snaps onto the label holder to hold a non-adhesive label in place or to protect any label from dirt and moisture.



### MetroMax® i Label Holder — {9.25}

Designed to accept label cards or adhesive labels. Slot measures approximately 1 1/4" (32mm).

Actual Length (in.) (mm)		Fits Shelf Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Label Holder
4 1/2	114	All		.03	.01	9989PX
11 9/32	285	24	610	.14	.06	9989X1
23 9/32	590	36	914	.30	.13	9989X3
35 9/32	895	48	1219	.40	.18	9989X5

### MetroMax® Q Label Holder — {9.25}

Designed to accept label cards or adhesive labels. Slot measures approximately 1 1/4" (32mm).

Actual Length (in.) (mm)		Fits Shelf Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Label Holder
4	102	All		.03	.01	MQ04LH
15 7/16	392	24	610	.14	.06	MQ24LH
27 7/16	697	36	914	.30	.13	MQ36LH
39 7/16	1002	48	1219	.40	.18	MQ48LH
51 7/16	1307	60	1524	.50	.22	MQ60LH
63 7/16	1611	72	1825	.60	.27	MQ72LH

### MetroMax® 4 Label Holder — {9.25}


Designed to accept label cards or adhesive labels. Slot measures approximately 1" (25mm).

Actual Length (in.) (mm)		Fits Shelf (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		4 Cat.No.
4	102	All		.03	.01	MAX4-9989PX

### Color Shelf Markers — {9.25}

- Attach easily to shelf for content identification.
- Use to assign color coding to individual shelf levels, shelving units, carts, or storage areas.
- i and Q versions available.
- 6" (152mm) length.

Shelf Marker Color	Approx. Pkd. Wt.		i	Q
	(lbs.)	(kg)	Cat. No.	Cat. No.
Blue	0.05	0.02	CSM6-BX	CSM6-BQ
Green	0.05	0.02	CSM6-GX	CSM6-GQ
Red	0.05	0.02	CSM6-RX	CSM6-RQ
Tan	0.05	0.02	CSM6-TX	CSM6-TQ
White	0.05	0.02	CSM6-WX	CSM6-WQ
Yellow	0.05	0.02	CSM6-YX	CSM6-YQ
Gray	0.05	0.02	CSM6-GRX	CSM6-GRQ

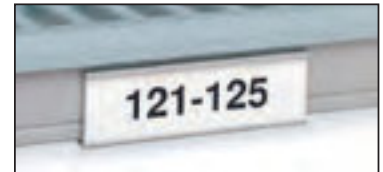

MetroMax® i Label Holder




MetroMax® Q Label Holder



MetroMax® 4 Label Holder



MetroMax® i Color Shelf Marker

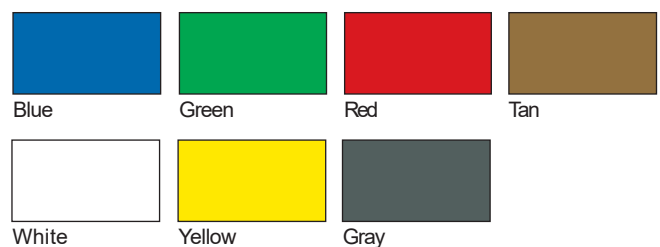



Totes sold separately

### Super Slide — {9.25}

- Designed to fit a 24" (610mm) wide shelf.
- Easily attaches to the shelf frame (under the mats) and is sized to hold 3", 5", 6", and 8" (76, 127, 152, 203mm) tall tote boxes (sold separately).
- MetroMax® i and MetroMax 4 models available.
- Corrosion resistant taupe epoxy finish with Microban antimicrobial product protection.

Width (in.) (mm)		Length (in.) (mm)		Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		i Cat. No.	4 Cat. No.
20.4	520	21.6	550	10.3	260	5.3	2	<b>MXSS2E</b>	<b>MAX4-SS2E</b>



### Adjustable Slides — {9.25}

- Slides can be adjusted left to right to accommodate a variety of pan, tray, and container sizes.
- MetroMax® i and Q models available.
- Corrosion resistant taupe epoxy finish with Microban antimicrobial product protection.
- Shelves must be spaced 20" (508mm) apart.
- Can be used in conjunction with 20" (508mm) tall shelf-to-shelf dividers.

Fits Shelf Width (in.) (mm)		Type	Approx. Pkd. Wt. (lbs.) (kg)		i Cat. No.	Q Cat. No.
24	610	Adjustable	12 <sup>3</sup> / <sub>4</sub>	6	<b>MX24SE</b>	<b>MQ24SE</b>



### Can Rack System — {9.25}

- Front loading, front dispensing can rack holds eight #10 cans or twelve #5 cans.
- Tough, corrosion resistant taupe epoxy finish with Microban antimicrobial product protection.
- Designed to fit a 24" (610mm) wide shelf.
- Mounts on any MetroMax® i or MetroMax Q shelf.

Width/Length/Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		i and Q Cat. No.
7 <sup>7</sup> / <sub>8</sub> x25 <sup>5</sup> / <sub>16</sub> x15	200x643x381	10	4.5	CR24E

## Storage Level Frames — {9.25}

- Open four sided frames accommodate drop-in accessories including wire baskets and stainless drying racks.
- Includes corrosion proof MetroMax i frame and a bag of wedges.
- Can be mounted on MetroMax i, MetroMax 4, and MetroMax Q shelving units.

Nominal Exterior Length		Frame Interior Width/Length		Approx. Pkd. Wt.		Cat. No.
Width (in.) (mm)	Length (in.) (mm)	(in.)	(mm)	(lbs.)	(kg)	
18	457	36	914	18x32	457x810	7 3.2 <b>M4F1836</b>
24	610	24	610	24x20	610x510	7 1/2 3.4 <b>M4F2424</b>
24	610	36	914	24x32	610x810	11 1/4 5.1 <b>M4F2436</b>
24	610	42	1060	24x38	610x965	13 1/4 6.0 <b>M4F2442</b>
24	610	48	1220	24x44	610x1120	15 6.8 <b>M4F2448</b>
24	610	60	1524	24x56	610x1370	18 3/4 8.5 <b>M4F2460</b>

**Note:** Any MetroMax i shelf can be converted to an open storage level frame. Simply remove the shelf mats and center beam to create an open frame.



### MetroMax i Configuration

QTY. to fill out shelf frame.

FRAME	B2416XE	B2422XE
M4F2436	2	
M4F2442	1	1
M4F2448		2
M4F2460	2	1

### MetroMax 4 Configuration

SHELF	B2416XE	B2422XE
MAX4-2436G		1
MAX4-2436G	2	
MAX4-2436G	1	1
MAX4-2436G	3	

**NOTE:** Remove the shelf mats to install the drop in basket.

## Wire Baskets — {9.25}

- Conveniently hold small items.
- 9" (229mm) deep.
- Built in storage handles allow easy removal.
- Corrosion resistant taupe epoxy finish.
- Weight Capacity: 50 lbs. (23kg)
- Installs flat. Mounts to a MetroMax i storage level frame. Retrofits to a MetroMax i shelf or MetroMax 4 shelf.

**NOTE:** Wire baskets can be retrofitted to MetroMax i or MetroMax 4 shelves.

**MetroMax i:** Remove the mats center beams and drop in the baskets.

**MetroMax 4:** Remove the mats and drop in the baskets.

Wire baskets can complement a MetroMax 4 shelf. If the requirement is to completely fill out the space with baskets, use a MetroMax i storage level frame.

Width		Length		Approx. Pkd. Wt.		Cat. No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	
24	610	16	406	10	4.5	<b>MB2416XE</b>
24	610	22	560	12	5.5	<b>MB2422XE</b>



## Glassware Handling Basket

Vinyl coated. Fits 18 x 36" (457 x 914mm) MetroMax i frame.

Cat. No. GWBSKT36

See Spec Sheet 52.01 for detail.

Not NSF listed.



## 3-Sided frames


- 1" (25mm) x 1 1/2" (38mm) structural steel tubing. Includes tri-lobal adapters to attach to posts. (Replacement adapters: Cat. No. MTLA bag of 4)
- Corrosion resistant taupe epoxy finish.
- Use when configuring work tables or as a 3-sided ledge to contain bulky items.

Nominal Width		Nominal Length		Approx. Pkd. Wt.		i, 4, and Q Cat. No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	
24	610	24	610	12	5.4	<b>M3TF2424E</b>
24	610	30	760	13	5.7	<b>M3TF2430E</b>
24	610	36	914	14	6.4	<b>M3TF2436E</b>
24	610	48	1220	18	8.2	<b>M3TF2448E</b>
24	610	60	1524	20	9.1	<b>M3TF2460E</b>





# Dry it.

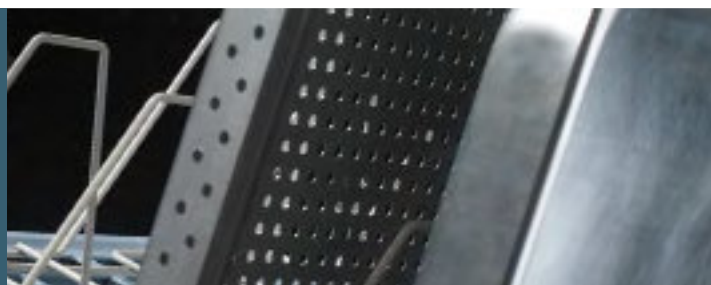

## MetroMax® i Drying Rack Unit — {9.31}

- Allows superior air circulation and fast drying of trays, pans, lids, pots and all pot sink items.
- Promotes food safety by eliminating moisture. Offers an efficient organized drying area.
- Mobile models come equipped with corrosion resistant polymer casters: (2) swivel 5PCX and (2) swivel/brake 5PCBX.
- Shelves, posts, and tray drying racks include Microban antimicrobial product protection
- NSF Listed

Models with two drop-ins (Cat. No. DR48S) and one cutting board/tray drying rack (Cat. No. MTR2448XE)

Configuration	Nominal Width (in.) (mm)		Nominal Length (in.) (mm)		Height (in.) (mm)		Pkd. Wt. (lbs.) (kg)		i Cat. No.
Stationary	24	610	48	1219	75½	1917	106	49	PR48X3
Mobile*	24	610	48	1219	68	1727	106	49	PR48VX3

\*Note: Includes two 5PCX swivel casters and two 5PCBX swivel casters with brakes.

Models with four cutting board/tray drying racks: (2) MTR2448XE and (2) MTR2448XEA

This rack is perfect for steam and bun pans, and one unit can hold up to 96 pans.

Configuration	Nominal Width (in.) (mm)		Nominal Length (in.) (mm)		Height (in.) (mm)		Pkd. Wt. (lbs.) (kg)		i Cat. No.
Stationary	24	610	48	1219	75½	1917	106	49	PR48X4
Mobile*	24	610	48	1219	68	1727	106	49	PR48VX4

\*Note: Includes two 5PCX swivel casters and two 5PCBX swivel casters with brakes.



## Cutting Board and Tray Drying Rack — {9.25} {9.31}

- Rack is compatible with MetroMax i, MetroMax Q, Super Erecta Pro, Super Adjustable, and Super Erecta wire shelves.
- Promotes safe air drying of cutting boards, trays and steam pans.
- 1½" (28mm) and 3" (76mm) slide spacing available.

Fits Shelf		Upright Spacing		Upright Height		Tray Caacity	Pkd. Wt.		i and Q
(in.)	(mm)	(in.)	(mm)	(in.)	(mm)		(lbs.)	(kg)	Cat. No.
24x36	610x914	1 1/8	28	6	150	24	13.5	6.1	MTR2436XE
24x48	610x1219	1 1/8	28	6	150	34	18.0	8.2	MTR2448XE
24x60	610x1524	1 1/8	28	6	150	42	22.5	10.2	MTR2460XE
24x36	610x914	3	76	6	150	10	9.8	4.4	MTR2436XEA
24x48	610x1219	3	76	6	150	14	13	5.9	MTR2448XEA
24x60	610x1524	3	76	6	150	17	16.3	7.4	MTR2460XEA

\*Note: Can be retrofitted to original MetroMax and MetroMax Q.





## Stainless Steel Drop-in Racks — {9.25}{9.31}

- Open wire design provides air flow to safely dry pots, pans, and containers
- Are installed over an open MetroMax® i frame and center beam.
- Can be retrofitted to existing MetroMax® i shelves. Simply remove the mats and drop in the stainless drying rack.

How to order: (1) drop-in rack, (1) 4-sided shelf frame, (1) replacement center beam

Width (in.) (mm)		Length (in.) (mm)		Height (in.) (mm)		Wire Spacing (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
24	610	33 <sup>7</sup> / <sub>8</sub>	854	5 <sup>1</sup> / <sub>4</sub>	133	<sup>3</sup> / <sub>4</sub>	19	9	4.1	<b>DR36S</b>
24	610	45 <sup>7</sup> / <sub>8</sub>	1156	5 <sup>1</sup> / <sub>4</sub>	133	<sup>3</sup> / <sub>4</sub>	19	12	5.4	<b>DR48S</b>
24	610	57 <sup>7</sup> / <sub>8</sub>	1458	5 <sup>1</sup> / <sub>4</sub>	133	<sup>3</sup> / <sub>4</sub>	19	15	6.8	<b>DR60S</b>

**Note:** Any MetroMax i shelf can be converted to an open storage level frame. Simply remove the shelf mats and center beam to create an open frame.



## Shelf Frames — See page 27.

## Replacement Center Beam

Fits Shelf Frame (in.) (mm)		Cat. No.
24 x 36	610 x 914	<b>RPMX36-CBEAM</b>
24 x 48	610 x 1219	<b>RPMX48-CBEAM</b>
24 x 60	610 x 1524	<b>RPMX60-CBEAM</b>

## MetroMax® i Sloped Basket Cart — {30.20}

- Ideal for compartmentalizing bulky or odd-shaped items.
- Baskets have a taupe epoxy finish with Microban antimicrobial product protection.  
*Note: Baskets are not suitable for walk-in coolers.*
- Baskets have semi open front for easy access.
- Baskets can mount flat or at a 10° angle for stock rotation
- Dividers adjust horizontally

Description	Height/Width/Length (in.) (mm)		Total Baskets Per Cart	Casters	Cat. No.
Open Cart	60x24x24	1524x610x610	4	*	<b>MXIV1</b>
Open Cart with Top Shelf	69x24x24	1753x610x610	4	*	<b>MXIV2</b>
Open Cart	60x24x42	1524x610x1066	8	†	<b>MXIV4</b>
Open Cart with Top Shelf	69x24x42	1753x610x1066	8	†	<b>MXIV5</b>
Open Cart	60x24x60	1524x610x1524	12	†	<b>MXIV6</b>
Open Cart with Top Shelf	69x24x60	1753x610x1524	12	†	<b>MXIV7</b>

**Note:** Each basket sold with cart includes two dividers and a label holder.

\*Four 5" (127mm) polyurethane casters; two swivel, two with brakes.

†5" (127mm) polyurethane casters with plated horns; casters on dolly frame; two swivel, one swivel with brake, and one rigid.



MXIV1

## Accessories

Description	(in.)	(mm)	Cat. No.
Basket with Label Holder	18 <sup>1</sup> / <sub>2</sub> x24 <sup>1</sup> / <sub>2</sub> x10	470x622x254	<b>IVB1</b>
Divider	9	229	<b>IVBD</b>



IVB1  
(shown with  
optional Divider)



Superior  
materials  
and design  
for every  
application.




Super Erecta Pro®  
 Super Adjustable Super Erecta®  
 and Super Erecta®  
 Erecta Shelf®  
 HD Super®

# WIRE & SOLID SHELVING SOLUTIONS

Wire/Polymer Hybrid Shelving .....	32-35
Easy-Adjust Shelving & Carts .....	36-39
Wire Shelving, Carts & Trucks .....	40-49
Casters & Accessories for Wire Shelving .....	50-63
qwikSLOT Adjustable Shelving .....	65-71
Shelving Storage Bins .....	72-73
Solid Shelving & Accessories .....	74-76
Light-Duty Wire Shelving & Accessories .....	77
Heavy-Duty Solid Shelving & Accessories .....	78-79

# Proven.

Genuine Metro Super Erecta®  
The industry standard —innovated and reinnovated.

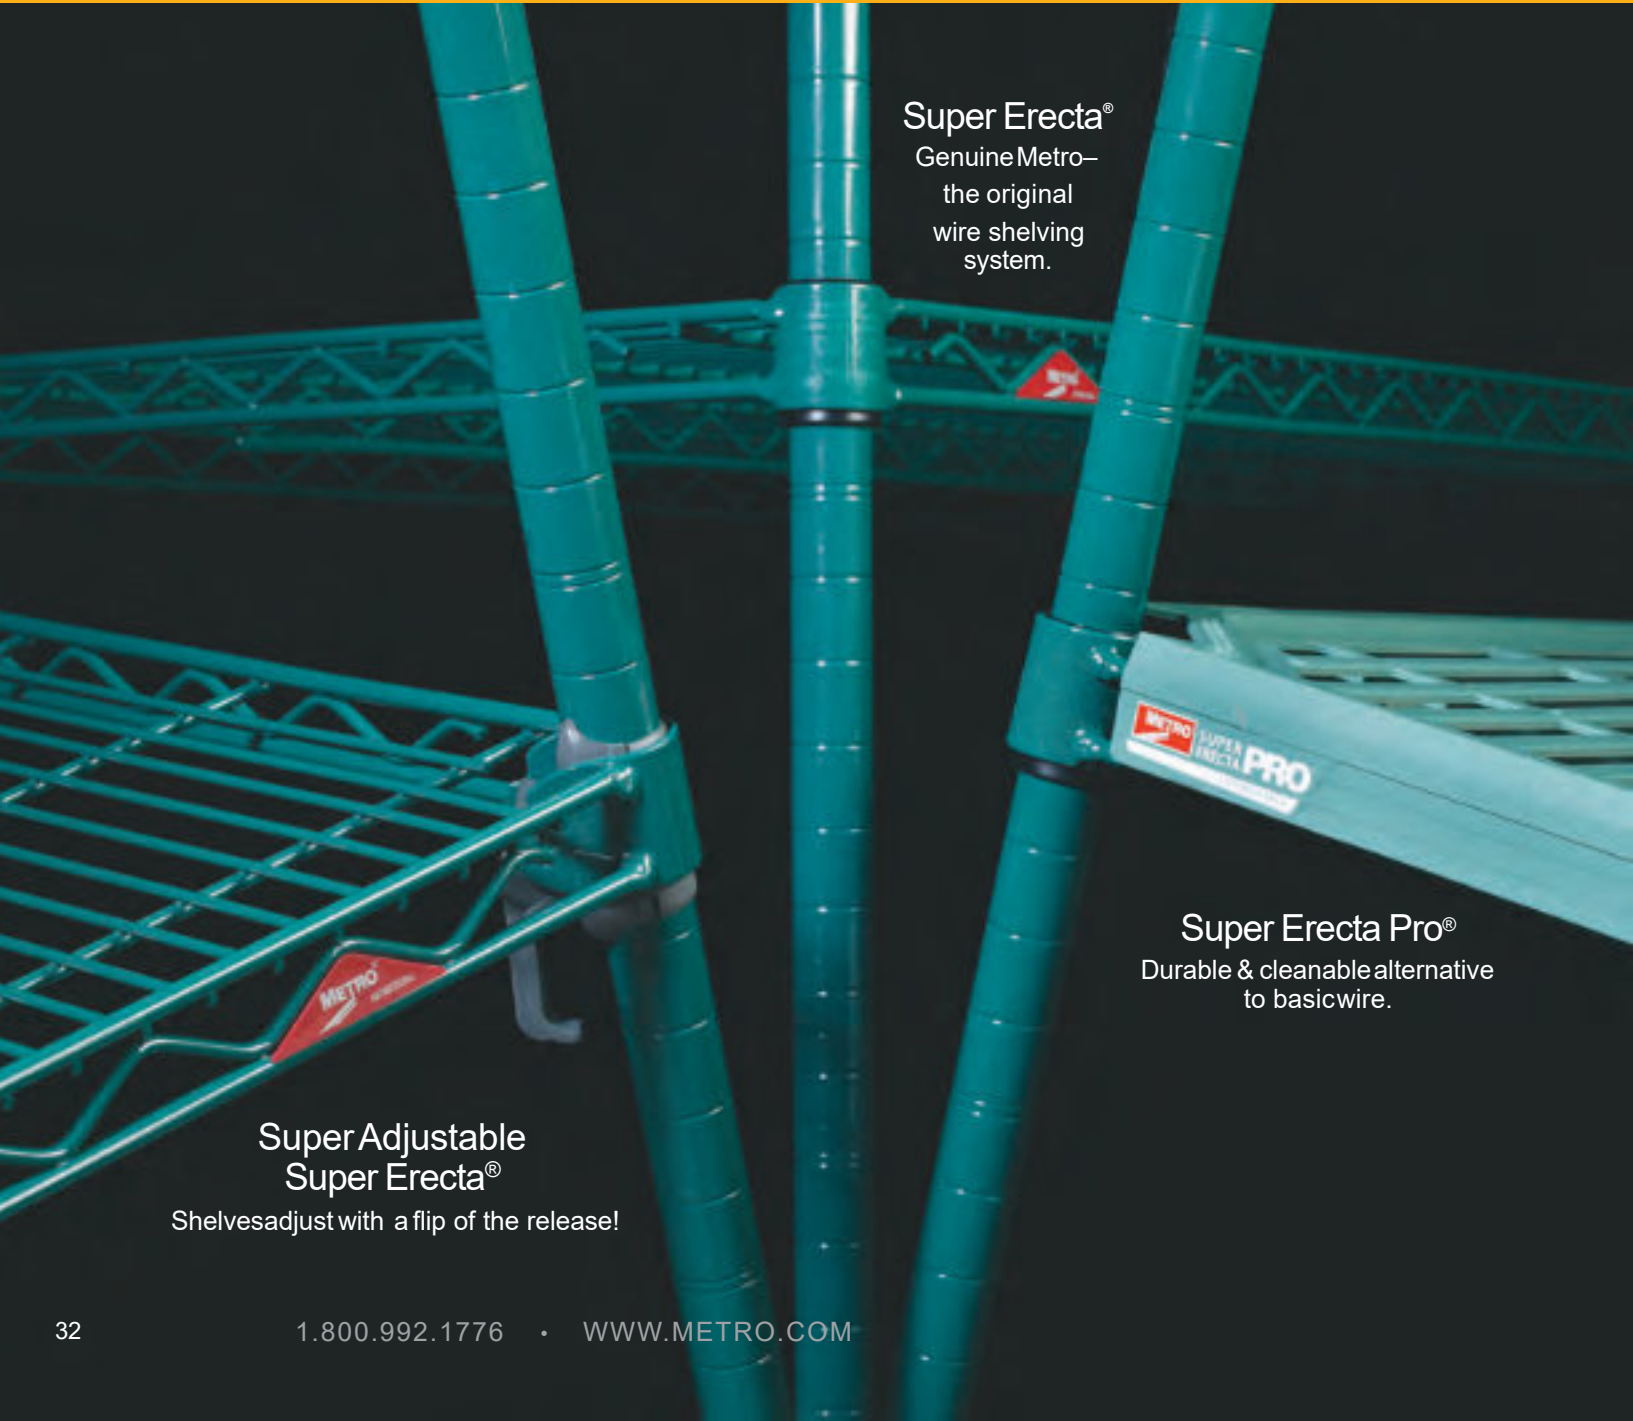

Super Erecta®  
Genuine Metro—  
the original  
wire shelving  
system.

Super Erecta Pro®  
Durable & cleanable alternative  
to basic wire.

Super Adjustable  
Super Erecta®

Shelves adjust with a flip of the release!



# Progress.

Super Erecta Pro™  
Durable & cleanable.  
The original —reinnovated.



Epoxy coated Super Erecta-style frames with removable polymer shelf mats.

Stays cleaner between cleanings.

Polymer shelf mats and Metroseal 3 epoxy coated shelf frames and posts have built in Microban® antimicrobial product protection.



Easy to clean.

Lift-off mats can be easily removed and washed by hand or in a wash machine.

Prolonged durability.

Polymer shelf mats withstand daily abuse from containers and sharp edges. Robust design provides the strength and rigidity of Super Erecta...holds up to 800 lbs. (363kg) per shelf.



Interchangeable.

Super Erecta Pro shelves can be configured with traditional shelf and accessory options on the same unit for maximum flexibility.



PROTECTION THAT LIVES ON  
**MICROBAN**



### Super Erecta Pro® Easy Order Kits

Kit includes four shelves and four 74.5" (1892mm) split posts. Ships in one box.

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Pro Metroseal 3
18x36 457x914	58 26.3	EZPR1836NK3-4
18x48 457x1219	73 33.1	EZPR1848NK3-4
24x36 610x914	72 32.6	EZPR2436NK3-4
24x48 610x1219	83 37.6	EZPR2448NK3-4

### Super Erecta Pro® Shelves — {10.80}

Packaging: Shelves are priced individually and packaged no more than 4 per carton except 60" (1524mm) and 72" (1829mm) lengths which are packaged no more than 2 per carton. Plastic split sleeves are included with each shelf.

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Pro Metroseal 3
18x24 457x610	6.0 2.7	PR1824NK3
18x30 457x760	7.8 3.5	PR1830NK3
18x36 457x914	9.5 4.2	PR1836NK3
18x42 457x1060	11.3 5.0	PR1842NK3
18x48 457x1219	13.0 5.8	PR1848NK3
18x54 457x1372	14.8 6.6	PR1854NK3
18x60 457x1524	16.5 7.4	PR1860NK3
18x72 457x1829	19.8 8.8	PR1872NK3
21x24 530x610	8.0 3.6	PR2124NK3
21x30 530x760	9.5 4.2	PR2130NK3
21x36 530x914	11.3 5.0	PR2136NK3
21x42 530x1060	12.5 5.6	PR2142NK3
21x48 530x1219	14.3 6.4	PR2148NK3
21x54 530x1372	16.5 7.4	PR2154NK3
21x60 530x1524	18.3 8.1	PR2160NK3
21x72 530x1829	21.5 9.6	PR2172NK3
24x24 610x610	9.5 4.2	PR2424NK3
24x30 610x760	11.3 5.0	PR2430NK3
24x36 610x914	13.0 5.8	PR2436NK3
24x42 610x1060	14.0 6.3	PR2442NK3
24x48 610x1219	15.5 6.9	PR2448NK3
24x54 610x1372	18.3 8.1	PR2454NK3
24x60 610x1524	20.0 8.9	PR2460NK3
24x72 610x1829	23.3 10.4	PR2472NK3

**Note:** Each Super Erecta Pro™ shelf up to and including 48" (1219mm) long have a maximum weight capacity of 800 lbs. (363kg) evenly distributed. Shelves longer than 48" (1219mm) have a maximum weight capacity of 600 lbs. (272kg) evenly distributed.

**Actual Dimensions:** Width: Add 1/4" (6mm) to nominal size.  
Length: Subtract 1/4" (6mm) from nominal size.

### Super Erecta with Metroseal 3™ — Standard Shelves

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Adjustable Metroseal 3	Cat. No. Super Erecta Metroseal 3	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Dunnage Shelf Metroseal 3
18x24 457x610	7 3.2	A1824NK3	1824NK3	14 6.3	1824DRK3
18x30 457x760	8 3.6	A1830NK3	1830NK3	18 8.1	1830DRK3
18x36 457x914	9.5 4.3	A1836NK3	1836NK3	21 9.4	1836DRK3
18x42 457x1060	11 5.0	A1842NK3	1842NK3	—	—
18x48 457x1219	12 5.4	A1848NK3	1848NK3	28 12.6	1848DRK3
18x54 457x1372	14.5 6.6	A1854NK3	1854NK3	—	—
18x60 457x1524	17 7.7	A1860NK3	1860NK3	34 15.3	1860DRK3
18x72 457x1829	20 9.1	A1872NK3	1872NK3	—	—
21x24 530x610	8 3.6	A2124NK3	2124NK3	—	—
21x30 530x760	9 4.1	A2130NK3	2130NK3	—	—
21x36 530x914	11 5.0	A2136NK3	2136NK3	—	—
21x42 530x1060	12 5.4	A2142NK3	2142NK3	—	—
21x48 530x1219	14 6.4	A2148NK3	2148NK3	—	—
21x54 530x1372	16 7.3	A2154NK3	2154NK3	—	—
21x60 530x1524	18 8.2	A2160NK3	2160NK3	—	—
21x72 530x1829	24 10.9	A2172NK3	2172NK3	—	—
24x24 610x610	9 4.1	A2424NK3	2424NK3	16 7.2	2424DRK3
24x30 610x760	11 5.0	A2430NK3	2430NK3	20 9.0	2430DRK3
24x36 610x914	13 5.9	A2436NK3	2436NK3	24 10.8	2436DRK3
24x42 610x1060	15 6.8	A2442NK3	2442NK3	—	—
24x48 610x1219	16 7.3	A2448NK3	2448NK3	30 13.5	2448DRK3
24x54 610x1372	19 8.6	A2454NK3	2454NK3	—	—
24x60 610x1524	21 9.5	A2460NK3	2460NK3	37 16.6	2460DRK3
24x72 610x1829	26 11.8	A2472NK3	2472NK3	—	—

Indicates antimicrobial product.

## SiteSelect™ Posts — {10.80}

Stationary SuperErecta SiteSelect posts are fitted with adjustable leveling bolts to compensate for uneven surfaces. Mobile posts come without leveling bolt assembly to accommodate stem casters. Special length posts are available. See page 50 for stem caster options.



SiteSelect posts provide a visual guide for positioning and adjusting shelves, saving considerable time during assembly and adjustment. An easy-to-identify double groove, every 8" (203mm), offers a quick way to align all shelves.

## Stationary Posts

Height (in.)	Height (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Metroseal 3	Cat. No. Stainless
14 1/2	370	1 0.5	<b>13PK3</b>	<b>13PS</b>
34 1/2	875	2 0.9	<b>33PK3</b>	<b>33PS</b>
54 9/16	1385	3 1.4	<b>54PK3</b>	<b>54PS</b>
62 9/16	1590	3 1/2 1.6	<b>63PK3</b>	<b>63PS</b>
74 7/8	1895	4 1.8	<b>74PK3</b>	<b>74PS</b>
86 5/8	2200	5 2.3	<b>86PK3</b>	<b>86PS</b>

## Mobile Posts

Height (in.)	Height (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Metroseal 3	Cat. No. Stainless
13 3/4	349	1 0.5	<b>13UPK3</b>	<b>13UPS</b>
33 3/4	857	2 0.9	<b>33UPK3</b>	<b>33UPS</b>
53 13/16	1366	3 1.4	<b>54UPK3</b>	<b>54UPS</b>
61 13/16	1570	3 1/2 1.6	<b>63UPK3</b>	<b>63UPS</b>
69 3/4	1772	3.8 1.7	<b>70UPK3</b>	—
73 7/8	1876	4 1.8	<b>74UPK3</b>	<b>74UPS</b>
85 7/8	2181	5 2.3	<b>86UPK3</b>	<b>86UPS</b>

## Accessories — {10.81}

Note: These accessories are designed to attach to a SuperErecta Pro Shelf. Accessories for basic SuperErecta wire shelves can be found on pages 55-63. For a complete list of compatible accessories for SuperErecta Pro shelves, please refer to specsheet 10.81 for more information.

## “S” Hooks

Eliminates the need for adjacent posts. Two required for each storage level.

Cat. No. Q9995Z

## Standard Divider

- Corrosionproof

Nominal Length (in.) (mm)	Fits Shelf Depth	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
18 457	18", 21" (457, 530mm)	1.3 0.6	<b>MQD18-8</b>
24 610	24" (610mm)	1.6 0.7	<b>MQD24-8</b>

## Shelf-to-Shelf Divider

- Connects between two shelves
- Corrosionproof

Nominal Height (in.) (mm)	Compatible with Shelf Depths (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
16 406	18, 21 457, 530	2.3 1.0	<b>MD18-16</b>
20 508	18, 21 457, 530	2.5 1.1	<b>MD18-20</b>
24 610	18, 21 457, 530	3.8 1.7	<b>MD18-24</b>
16 406	24 610	2.8 1.2	<b>MD24-16</b>
20 508	24 610	3.0 1.3	<b>MD24-20</b>
24 610	24 610	4.4 2.0	<b>MD24-24</b>

## Color Shelf Marker

- 6" (152mm) Length
- Fits SuperErecta Pro Shelf
- Attach easily to shelf to identify contents stored.

Color	Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
Blue	6 152	0.05 0.02	<b>CSM6-BQ</b>
Green	6 152	0.05 0.02	<b>CSM6-GQ</b>
Red	6 152	0.05 0.02	<b>CSM6-RQ</b>
Tan	6 152	0.05 0.02	<b>CSM6-TQ</b>
White	6 152	0.05 0.02	<b>CSM6-WQ</b>
Yellow	6 152	0.05 0.02	<b>CSM6-YQ</b>
Gray	6 152	0.05 0.02	<b>CSM6-GRQ</b>

## Label Holders

- Fits SuperErecta Pro Shelf
- Plastic holders snap into place to accommodate 1" (25mm) tall adhesive label.

Cat. No. MQ04LH



Indicates antimicrobial product.



# Reclaim Wasted Space.



Super Adjustable  
Super Erecta® Shelving

Adjust and add shelves  
quickly and easily  
to reclaim wasted space.



Super Erecta

Easy "no-tool"  
shelf adjustment

1" (25mm)  
spacing minimizes  
dead space

Efficient use of space  
allows more storage  
levels to be added.

Storage efficiency  
can increase  
by 25% or more



Super Adjustable  
Super Erecta







# SUPER ADJUSTABLE SUPER ERECTA® SHELVING

## Super Adjustable Wire Shelves — {10.01a} {10.10a}

Packaging: Wire shelves are priced individually and packaged no more than 4 per carton except 60" (1524mm) and 72" (1829mm) lengths and 30" (760mm) and 36" (914mm) widths, which are packaged no more than 2 per carton. Plastic sleeves and wedges are included with each shelf.

Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
14x24 355x610	6 2.7	A1424NC	A1424NK3	A1424NS
14x30 355x760	7 3.2	A1430NC	A1430NK3	A1430NS
14x36 355x914	8 3.6	A1436NC	A1436NK3	A1436NS
14x42 355x1066	9 1/2 4.3	A1442NC	A1442NK3	A1442NS
14x48 355x1219	10 1/2 4.7	A1448NC	A1448NK3	A1448NS
14x60 355x1524	14 6.3	A1460NC	A1460NK3	A1460NS
14x72 355x1825	17 7.7	A1472NC	A1472NK3	A1472NS
18x24 457x610	7 3.2	A1824NC	A1824NK3	A1824NS
18x30 457x760	8 3.6	A1830NC	A1830NK3	A1830NS
18x36 457x914	9 1/2 4.3	A1836NC	A1836NK3	A1836NS
18x42 457x1066	11 5.0	A1842NC	A1842NK3	A1842NS
18x48 457x1219	12 5.4	A1848NC	A1848NK3	A1848NS
18x54 457x1370	14 1/2 6.6	A1854NC	A1854NK3	A1854NS
18x60 457x1524	17 7.7	A1860NC	A1860NK3	A1860NS
18x72 457x1829	20 9.1	A1872NC	A1872NK3	A1872NS
21x24 530x610	8 3.6	A2124NC	A2124NK3	A2124NS
21x30 530x760	9 4.1	A2130NC	A2130NK3	A2130NS
21x36 530x914	11 5.0	A2136NC	A2136NK3	A2136NS
21x42 530x1066	12 5.4	A2142NC	A2142NK3	A2142NS
21x48 530x1219	14 6.4	A2148NC	A2148NK3	A2148NS
21x54 530x1370	16 7.3	A2154NC	A2154NK3	A2154NS
21x60 530x1524	18 8.2	A2160NC	A2160NK3	A2160NS
21x72 530x1829	24 10.9	A2172NC	A2172NK3	A2172NS
24x24 610x610	9 4.1	A2424NC	A2424NK3	A2424NS
24x30 610x760	11 5.0	A2430NC	A2430NK3	A2430NS
24x36 610x914	13 5.9	A2436NC	A2436NK3	A2436NS
24x42 610x1066	15 6.8	A2442NC	A2442NK3	A2442NS
24x48 610x1219	16 7.3	A2448NC	A2448NK3	A2448NS
24x54 610x1370	18 8.6	A2454NC	A2454NK3	A2454NS
24x60 610x1524	21 9.5	A2460NC	A2460NK3	A2460NS
24x72 610x1829	26 11.8	A2472NC	A2472NK3	A2472NS
30x36 760x914	15 6.8	A3036NC		
30x48 760x1219	21 9.5	A3048NC		
30x60 760x1524	26 1/2 11.8	A3060NC		
30x72 760x1829	31 14.0	A3072NC		
36x36 910x914	18 8.2	A3636NC		
36x48 910x1219	23 10.4	A3648NC		
36x60 910x1524	29 13.1	A3660NC		
36x72 910x1829	34 1/2 15.4	A3672NC		

Note: The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.  
Note: Wire shelves up to 48" (1219mm) long have a weight capacity of 800 lbs. (363kg); Shelves longer than 48" (1219mm) have a weight capacity of 600 lbs. (272kg) per shelf evenly distributed.  
Note: 14" (355mm) deep shelving – Stationary units taller than 63" (1600mm) must be fastened to the floor or wall using Metro foot plates or wall brackets. On mobile units the maximum allowable post height is 54" (1370mm).  
Note: Metroseal 3 is not cart-washable.

Indicates antimicrobial product.

## SiteSelect™ Posts — {10.01a} {10.10a}

Stationary Super Erecta® SiteSelect posts are fitted with adjustable leveling bolts to compensate for uneven surfaces. Mobile posts come without leveling bolt assembly to accommodate stem casters. Special length posts are available.†

STATIONARY					MOBILE				
Height* (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless**	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Plated	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless	
7 1/2 191	1/2 0.3	7P	7PK3						
14 1/2 370	1 0.5	13P	13PK3	13PS	1 0.5	13UP	13UPK3	13UPS	
27 1/2 699	1 3/4 0.75	27P	27PK3	27PS	1 3/4 0.75	27UP	27UPK3	27UPS	
34 1/2 875	2 0.9	33P	33PK3	33PS	2 0.9	33UP	33UPK3	33UPS	
54 9/16 1385	3 1.4	54P	54PK3	54PS	3 1.4	54UP	54UPK3	54UPS	
62 29/16 1590	3 1/2 1.6	63P	63PK3	63PS	3 1/2 1.6	63UP	63UPK3	63UPS	
74 5/8 1895	4 1.8	74P	74PK3	74PS	3 3/4 1.7		70UPK3		
86 5/8 2200	5 2.3	86P	86PK3	86PS	4 1.8	74UP	74UPK3	74UPS	
96 5/8 2454	5 1/2 2.5	***96P			4.5 2.0	86UP	86UPK3	86UPS	

\*Height includes leveling bolt and cap.

\*\*Stainless stationary post includes stainless leveling bolt.

\*\*\*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.

†Note: Special length posts are available, priced at next higher length plus a cutting charge. Actual height of a stationary cut post is the nominal height plus 3/8" (10mm).

These posts come without leveling bolt assembly to accommodate stem casters.


†Note: Actual height of a mobile cut post is the nominal height minus 1/4" (6mm).

Casters for mobile applications can be found on pages 50 & 51.



## Shelving Starter and Add-On Units — {10.91}

- Starter Units consist of four posts and indicated number of Super Adjustable Super Erecta shelves.
- Add-On Units consist of two posts, indicated number of shelves, and two “S” Hooks per shelf, for attaching shelf to adjacent unit.

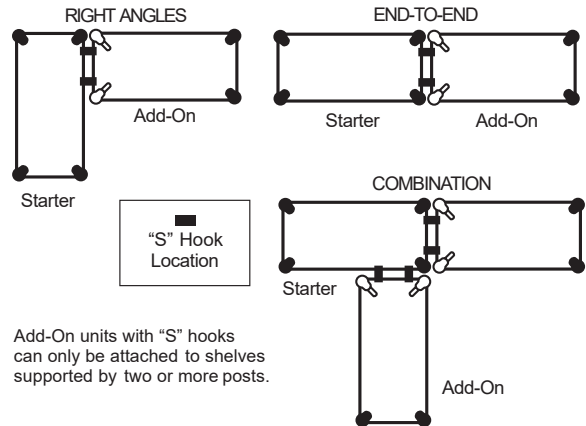

For additional wire shelves, order from page 37.

Chrome Four-Tier Unit with 63" posts

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
18x24 457x610	42 19.1	A316C	35 15.9	AA316C
18x30 457x760	47 21.3	A326C	40 18.1	AA326C
18x36 457x914	53 24.0	A336C	46 20.9	AA336C
18x42 457x1060	57 25.9	A346C	50 22.7	AA346C
18x48 457x1219	63 28.6	A356C	56 25.4	AA356C
18x60 457x1524	82 37.2	A366C	75 34.0	AA366C
18x72 457x1829	94 42.6	A376C	87 39.5	AA376C
21x24 530x610	46 20.9	A416C	39 17.7	AA416C
21x30 530x760	52 23.6	A426C	45 20.4	AA426C
21x36 530x914	59 26.8	A436C	52 23.6	AA436C
21x42 530x1060	65 29.5	A446C	58 26.3	AA446C
21x48 530x1219	71 32.2	A456C	64 29.0	AA456C
21x60 530x1524	88 39.9	A466C	81 36.7	AA466C
21x72 530x1829	98 44.5	A476C	92 41.7	AA476C
24x24 610x610	50 22.7	A516C	43 19.5	AA516C
24x30 610x760	57 25.9	A526C	50 22.7	AA526C
24x36 610x914	65 29.5	A536C	58 26.3	AA536C
24x42 610x1060	72 32.7	A546C	65 29.5	AA546C
24x48 610x1219	79 35.8	A556C	72 32.7	AA556C
24x60 610x1524	98 44.5	A566C	91 41.3	AA566C
24x72 610x1829	120 54.4	A576C	113 51.3	AA576C

Actual Dimensions: Width: Add 1/8" (3.2mm) to nominal size.  
Length: Subtract 1/8" (3.2mm) from nominal size.

Chrome Five-Tier Unit with 74" posts

Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
51 23.1	5A317C	43 19.5	5AA317C
58 26.3	5A327C	50 22.7	5AA327C
65 29.5	5A337C	57 25.9	5AA337C
70 31.8	5A347C	62 28.1	5AA347C
78 35.4	5A357C	70 31.8	5AA357C
102 46.3	5A367C	93 42.2	5AA367C
117 53.1	5A377C	108 49.0	5AA377C
57 25.9	5A417C	48 21.8	5AA417C
64 29.0	5A427C	56 25.4	5AA427C
73 33.1	5A437C	65 29.5	5AA437C
81 36.7	5A447C	73 33.1	5AA447C
88 39.9	5A457C	80 36.3	5AA457C
109 49.4	5A467C	101 45.8	5AA467C
122 55.3	5A477C	113 51.3	5AA477C
62 28.1	5A517C	53 24.0	5AA517C
71 32.2	5A527C	62 28.1	5AA527C
81 36.7	5A537C	73 33.1	5AA537C
89 40.4	5A547C	81 36.7	5AA547C
98 44.5	5A557C	90 40.8	5AA557C
122 55.3	5A567C	113 51.3	5AA567C
149 67.6	5A577C	141 64.0	5AA577C



### Replacement “S” Hook

2 are required for each storage level.  
Cat. No. 9995Z



### Security “S” Hook

2 are required for each storage level.  
Chrome. Cat. No. H9995C  
Black. Cat. No. H9995B



## Metroseal 3 Four-Tier Unit with 63" posts

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
18x24 457x610	42 19.1	A316K3	35 15.9	AA316K3
18x30 457x760	47 21.3	A326K3	40 18.1	AA326K3
18x36 457x914	53 24.0	A336K3	46 20.9	AA336K3
18x42 457x1060	57 25.9	A346K3	50 22.7	AA346K3
18x48 457x1219	63 28.6	A356K3	56 25.4	AA356K3
18x60 457x1524	82 37.2	A366K3	75 34.0	AA366K3
18x72 457x1829	94 42.6	A376K3	87 39.5	AA376K3
21x24 530x610	46 20.9	A416K3	39 17.7	AA416K3
21x30 530x760	52 23.6	A426K3	45 20.4	AA426K3
21x36 530x914	59 26.8	A436K3	52 23.6	AA436K3
21x42 530x1060	65 29.5	A446K3	58 26.3	AA446K3
21x48 530x1219	71 32.2	A456K3	64 29.0	AA456K3
21x60 530x1524	88 39.9	A466K3	81 36.7	AA466K3
21x72 530x1829	98 44.5	A476K3	92 41.7	AA476K3
24x24 610x610	50 22.7	A516K3	43 19.5	AA516K3
24x30 610x760	57 25.9	A526K3	50 22.7	AA526K3
24x36 610x914	65 29.5	A536K3	58 26.3	AA536K3
24x42 610x1060	72 32.7	A546K3	65 29.5	AA546K3
24x48 610x1219	79 35.8	A556K3	72 32.7	AA556K3
24x60 610x1524	98 44.5	A566K3	91 41.3	AA566K3
24x72 610x1829	120 54.4	A576K3	113 51.3	AA576K3

Actual Dimensions: Width: Add 1/8" (3.2mm) to nominal size.  
Length: Subtract 1/8" (3.2mm) from nominal size.\*



## Metroseal 3 Five-Tier Unit with 74" posts

Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
51 23.1	5A317K3	43 19.5	5AA317K3
58 26.3	5A327K3	50 22.7	5AA327K3
65 29.5	5A337K3	57 25.9	5AA337K3
70 31.8	5A347K3	62 28.1	5AA347K3
78 35.4	5A357K3	70 31.8	5AA357K3
102 46.3	5A367K3	93 42.2	5AA367K3
117 53.1	5A377K3	108 49.0	5AA377K3
57 25.9	5A417K3	48 21.8	5AA417K3
64 29.0	5A427K3	56 25.4	5AA427K3
73 33.1	5A437K3	65 29.5	5AA437K3
81 36.7	5A447K3	73 33.1	5AA447K3
88 39.9	5A457K3	80 36.3	5AA457K3
109 49.4	5A467K3	101 45.8	5AA467K3
122 55.3	5A477K3	113 51.3	5AA477K3
62 28.1	5A517K3	53 24.0	5AA517K3
71 32.2	5A527K3	62 28.1	5AA527K3
81 36.7	5A537K3	73 33.1	5AA537K3
89 40.4	5A547K3	81 36.7	5AA547K3
98 44.5	5A557K3	90 40.8	5AA557K3
122 55.3	5A567K3	113 51.3	5AA567K3
149 67.6	5A577K3	141 64.0	5AA577K3

Indicates antimicrobial product.

## Super Adjustable Super Erecta® Stem Caster Carts — {11.01a}

- Consists of Super Adjustable Super Erecta wire shelves.
- 5" (127mm) resilient rubber or polyurethane casters with donut bumpers.



Super Adjustable Super Erecta® Wire Stem Caster Cart



"BC" models with resilient rubber casters.

"EC" models with polyurethane casters.

## 4-Tier Models – Chrome Shelves and Chrome-Plated Posts Overall Height 67 7/8" (1724mm)


Shelf Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Catalog Number with Casters	Two Swivel Two Brake Resilient Rubber Casters	Two Swivel Two Brake Polyurethane Casters
18x36 457x914	60 27	A336BC	A336BC	A336EC
18x48 457x1219	72 32	A356BC	A356BC	A356EC
18x60 457x1524	88 40	A366BC	A366BC	A366EC
21x36 530x914	69 31	A436BC	A436BC	A436EC
21x48 530x1219	81 36	A456BC	A456BC	A456EC
21x60 530x1524	98 44	A466BC	A466BC	A466EC
24x36 610x914	76 34	A536BC	A536BC	A536EC
24x48 610x1219	92 41	A556BC	A556BC	A556EC
24x60 610x1524	112 51	A566BC	A566BC	A566EC

## 5-Tier Models – With Chrome Shelves and Chrome-Plated Posts Overall Height 67 7/8" (1724mm)

Shelf Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Catalog Number with Casters	Two Swivel Two Brake Resilient Rubber Casters	Two Swivel Two Brake Polyurethane Casters
18x36 457x914	60 27	5A336BC	5A336BC	5A336EC
18x48 457x1219	72 32	5A356BC	5A356BC	5A356EC
18x60 457x1524	88 40	5A366BC	5A366BC	5A366EC
21x36 530x914	69 31	5A436BC	5A436BC	5A436EC
21x48 530x1219	81 36	5A456BC	5A456BC	5A456EC
21x60 530x1524	98 44	5A466BC	5A466BC	5A466EC
24x36 610x914	76 34	5A536BC	5A536BC	5A536EC
24x48 610x1219	92 41	5A556BC	5A556BC	5A556EC
24x60 610x1524	112 51	5A566BC	5A566BC	5A566EC

Note: Models include 63UP posts.  
Use a solid shelf on the lowest levels to protect contents on the bottom of the cart from debris and dripping. (See page 75).

# Genuine Metro.

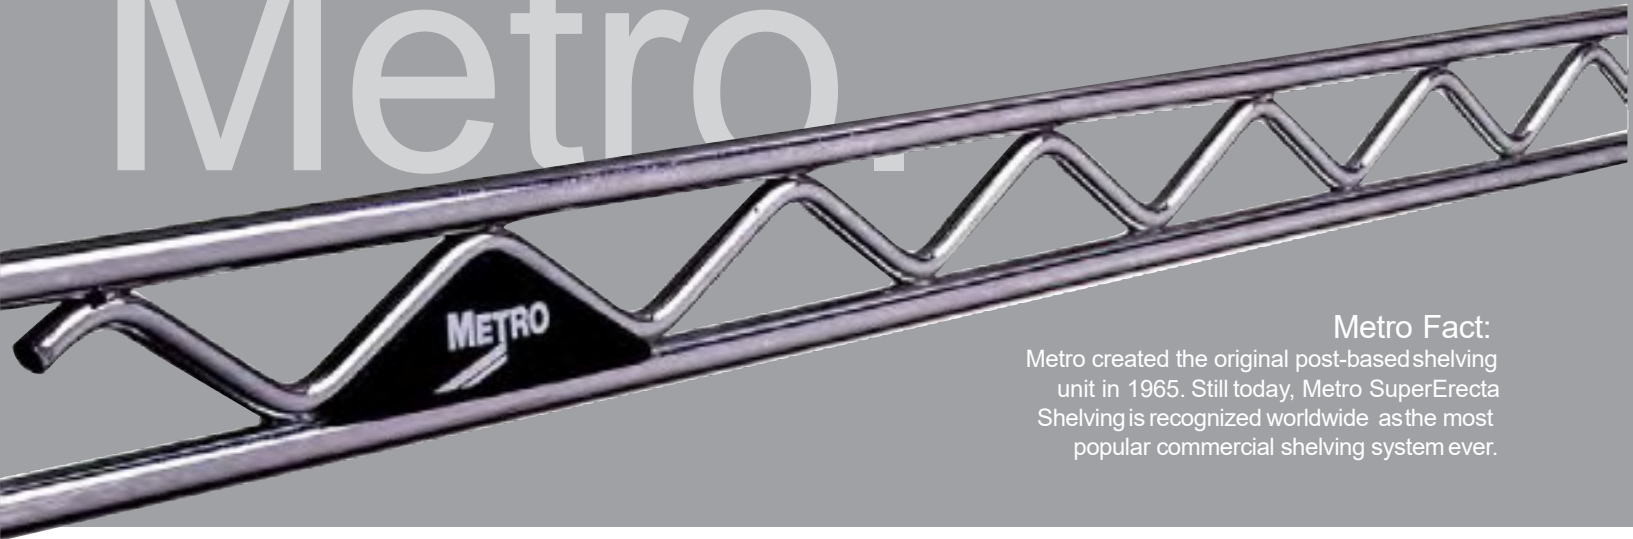

## Metro Fact:

Metro created the original post-based shelving unit in 1965. Still today, Metro SuperErecta Shelving is recognized worldwide as the most popular commercial shelving system ever.



NSF

## Super Erecta® Shelving System

The original wire storage system.

A storage system that defines the extent of space, Super Erecta's revolutionary concept was fresh and innovative from its start —nearly 50 years ago. It has continued to evolve, with nearly 100 highly specialized accessories, aimed at meeting the diversity of today's challenges.


- Adjustable: Shelves can be repositioned at precise 1" (25mm) increments along the length of the numbered posts.
- Unique Design: Open-wire design minimizes dust accumulation, allows a free circulation of air, and greater visibility of stored items.
- Mobile: Full choice of casters available for mobile applications.



SiteSelect posts provide a visual guide for positioning and adjusting shelves, saving considerable time during assembly and adjustment. An easy-to-identify double groove, every 8" (203mm), offers a quick way to align all shelves.



## Shelving Finishes Guide

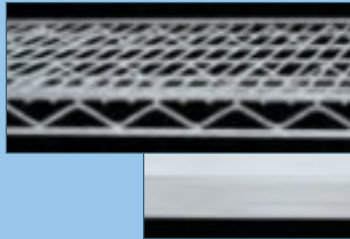

*Wire  
& Solid*




### Type 304 Polished Stainless Steel

Addressthe most aggressiveapplications and environments. All-stainless solid and wire options exist for high temperature automated cart wash and autoclave applications.

### Standard Epoxy and Designer Finishes

A pleasingaesthetic and basicprotection for dry environments.

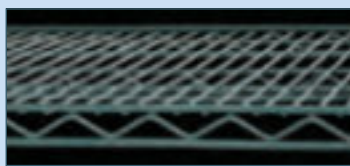


### Metroseal 3™ Epoxy

Corrosionresistantfinish for wet or high humidity environments with a 12 yearwarranty againstrust and corrosion. Microban antimicrobial is built into the finish to keep the product "cleaner between cleanings".



### Chrome Plating

The "real"nickel-chrome finish for dry, low humidity environments. Metro's durable chrome finish includes a protective lacquer coat.

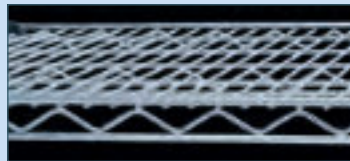

### Brite

Economical,chromate finish for dry, low humidity environments. Metro's Brite finish provides the look of chrome and includes a protective lacquer coat.



## Shelving Post Guide

Standard Stationary Post with adjustable leveling foot. Stainless models also feature a stainless leveling foot. Use Foot Plates for greater stability.

Standard Stem Caster Mobile Post accepts a Metro stem caster. Use these for the majority of standard duty transport and movable storage applications.

### Cart Wash and Autoclave Applications

Swaged stainless post has a fastened aluminum post cap and is specifically designed to withstand high temperatures. See page 50 for part numbers.

### Heavy Duty Transport

Staked post attaches to a dolly truck to address abusive transport applications. The reinforced connection between the base receptacle and post provides a more secure connection to the dolly truck. See page 52 for part numbers.



# SUPER ERECTA® SHELVING SYSTEM



## Wire Shelves — {10.01a} {10.10a}

Packaging: Wire shelves are priced individually and packaged no more than 4 per carton except 60" (1524mm) and 72" (1829mm) lengths and 30" (760mm) and 36" (914mm) widths, which are packaged no more than 2 per carton. Plastic sleeves and wedges are included with each shelf.

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless	
14x24	355x610	6	2.7	1424BR	1424NC	1424NK3	1424NS
14x30	355x760	7	3.2	1430BR	1430NC	1430NK3	1430NS
14x36	355x914	8	3.6	1436BR	1436NC	1436NK3	1436NS
14x42	355x1066	9½	4.3	1442BR	1442NC	1442NK3	1442NS
14x48	355x1219	10½	4.7	1448BR	1448NC	1448NK3	1448NS
14x60	355x1524	14	6.3	1460BR	1460NC	1460NK3	1460NS
14x72	355x1829	17	7.7	1472BR	1472NC	1472NK3	1472NS
18x18	457x457	6	2.7	N/A	1818NC	N/A	N/A
18x24	457x610	7	3.2	1824BR	1824NC	1824NK3	1824NS
18x30	457x760	8	3.6	1830BR	1830NC	1830NK3	1830NS
18x36	457x914	9½	4.3	1836BR	1836NC	1836NK3	1836NS
18x42	457x1066	11	5.0	1842BR	1842NC	1842NK3	1842NS
18x48	457x1219	12	5.4	1848BR	1848NC	1848NK3	1848NS
18x54	457x1370	14½	6.6	1854BR	1854NC	1854NK3	1854NS
18x60	457x1524	17	7.7	1860BR	1860NC	1860NK3	1860NS
18x72	457x1829	20	9.1	1872BR	1872NC	1872NK3	1872NS
21x24	530x610	8	3.6	2124BR	2124NC	2124NK3	2124NS
21x30	530x760	9	4.1	2130BR	2130NC	2130NK3	2130NS
21x36	530x914	11	5.0	2136BR	2136NC	2136NK3	2136NS
21x42	530x1066	12	5.4	2142BR	2142NC	2142NK3	2142NS
21x48	530x1219	14	6.4	2148BR	2148NC	2148NK3	2148NS
21x54	530x1370	16	7.3	2154BR	2154NC	2154NK3	2154NS
21x60	530x1524	18	8.2	2160BR	2160NC	2160NK3	2160NS
21x72	530x1829	24	10.9	2172BR	2172NC	2172NK3	2172NS
24x24	610x610	9	4.1	2424BR	2424NC	2424NK3	2424NS
24x30	610x760	11	5.0	2430BR	2430NC	2430NK3	2430NS
24x36	610x914	13	5.9	2436BR	2436NC	2436NK3	2436NS
24x42	610x1066	15	6.8	2442BR	2442NC	2442NK3	2442NS
24x48	610x1219	16	7.3	2448BR	2448NC	2448NK3	2448NS
24x54	610x1370	19	8.6	2454BR	2454NC	2454NK3	2454NS
24x60	610x1524	21	9.5	2460BR	2460NC	2460NK3	2460NS
24x72	610x1829	26	11.8	2472BR	2472NC	2472NK3	2472NS
30x36	760x914	15	6.8		3036NC	3036NK3	3036NS
30x48	760x1219	21	9.5		3048NC	3048NK3	3048NS
30x60	760x1524	26½	11.8		3060NC	3060NK3	3060NS
30x72	760x1829	31	14.0		3072NC	3072NK3	3072NS
36x36	910x914	18	8.2		3636NC	3636NK3	3636NS
36x48	910x1219	23	10.4		3648NC	3648NK3	3648NS
36x60	910x1524	29	13.1		3660NC	3660NK3	3660NS
36x72	910x1829	34½	15.4		3672NC	3672NK3	3672NS

Note: The actual length of the shelves is 1/8" (3.2mm) shorter than the nominal dimension shown. The actual depth of the shelves is 1/8" (3.2mm) greater than the nominal dimension shown.

Note: Wire shelves up to 48" (1219mm) long have a weight capacity of 800 lbs. (363kg); Shelves longer than 48" (1219mm) have a weight capacity of 600 lbs. (272kg) per shelf evenly distributed.

Note: 14" (355mm) deep shelving – Stationary units taller than 63" (1600mm) must be fastened to the floor or wall using Metro foot plates or wall brackets. On mobile units the maximum allowable post height is 54" (1370mm).

Note: Metroseal 3 is not cart-washable.

## SiteSelect™ Posts — {10.01a} {10.10a}

Stationary Super Erecta® SiteSelect posts are fitted with adjustable leveling bolts to compensate for uneven surfaces. Mobile posts come without leveling bolt assembly to accommodate stem casters. Special length posts are available.†

STATIONARY							MOBILE				
Height* (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless**	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Plated	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
7 1/2	191	1/2	0.3	7P	7PK3						
14 1/2	370	1	0.5	13P	13PK3	13PS	1	0.5	13UP	13UPK3	13UPS
27 1/2	699	1 3/4	0.75	27P	27PK3	27PS	1 3/4	0.75	27UP	27UPK3	27UPS
34 1/2	875	2	0.9	33P	33PK3	33PS	2	0.9	33UP	33UPK3	33UPS
54 9/16	1385	3	1.4	54P	54PK3	54PS	3	1.4	54UP	54UPK3	54UPS
62 9/16	1590	3 1/2	1.6	63P	63PK3	63PS	3 1/2	1.6	63UP	63UPK3	63UPS
							3 3/4	1.7		70UPK3	
74 5/8	1895	4	1.8	74P	74PK3	74PS	4	1.8	74UP	74UPK3	74UPS
86 5/8	2200	5	2.3	86P	86PK3	86PS	4.5	2.0	86UP	86UPK3	86UPS
96 5/8	2454	5 1/2	2.5	***96P							

These posts come without leveling bolt assembly to accommodate stem casters.

\*Height includes leveling bolt and cap.

\*\*Stainless stationary post includes stainless leveling bolt.

\*\*\*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.

†Note: Special length posts are available, priced at next higher length plus a cutting charge.

Actual height of a stationary cut post is the nominal height plus 3/8" (10mm)

These posts come without leveling bolt assembly to accommodate stem casters.

†Note: Actual height of a mobile cut post is the nominal height minus 1/4" (6mm)

Casters for mobile applications can be found on pages 50 & 51.

Indicates antimicrobial product.

## Designer Color Shelving — {10.14}

Available in a wide spectrum of colors that complement any decor.

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		STANDARD COLORS			DESIGNER COLORS	
				Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Flame†	Cat. No. Designer Colors*
14x24	355x610	6	2.7	1424NBL	1424NW	1424N-DSG	1424NF	1424N-D
14x30	355x760	7	3.2	1430NBL	1430NW	1430N-DSG	1430NF	1430N-D
14x36	355x914	8	3.6	1436NBL	1436NW	1436N-DSG	1436NF	1436N-D
14x42	355x1066	9½	4.3	1442NBL	1442NW	1442N-DSG	1442NF	1442N-D
14x48	355x1219	10½	4.7	1448NBL	1448NW	1448N-DSG	1448NF	1448N-D
14x60	355x1524	14	6.3	1460NBL	1460NW	1460N-DSG	1460NF	1460N-D
14x72	355x1829	17	7.7	1472NBL	1472NW	1472N-DSG	1472NF	1472N-D
18x18	457x457	6	2.7	1818NBL	1818NW	1818N-DSG	1818NF	1818N-D
18x24	457x610	7	3.2	1824NBL	1824NW	1824N-DSG	1824NF	1824N-D
18x30	457x760	8	3.6	1830NBL	1830NW	1830N-DSG	1830NF	1830N-D
18x36	457x914	9½	4.3	1836NBL	1836NW	1836N-DSG	1836NF	1836N-D
18x42	457x1066	11	5.0	1842NBL	1842NW	1842N-DSG	1842NF	1842N-D
18x48	457x1219	12	5.4	1848NBL	1848NW	1848N-DSG	1848NF	1848N-D
18x54	457x1370	14½	6.6	1854NBL	1854NW	1854N-DSG	1854NF	1854N-D
18x60	457x1524	17	7.7	1860NBL	1860NW	1860N-DSG	1860NF	1860N-D
18x72	457x1829	20	9.1	1872NBL	1872NW	1872N-DSG	1872NF	1872N-D
21x24	530x610	8	3.6	2124NBL	2124NW	2124N-DSG	2124NF	2124N-D
21x30	530x760	9	4.1	2130NBL	2130NW	2130N-DSG	2130NF	2130N-D
21x36	530x914	11	5.0	2136NBL	2136NW	2136N-DSG	2136NF	2136N-D
21x42	530x1066	12	5.4	2142NBL	2142NW	2142N-DSG	2142NF	2142N-D
21x48	530x1219	14	6.4	2148NBL	2148NW	2148N-DSG	2148NF	2148N-D
21x54	530x1370	16	7.3	2154NBL	2154NW	2154N-DSG	2154NF	2154N-D
21x60	530x1524	18	8.2	2160NBL	2160NW	2160N-DSG	2160NF	2160N-D
21x72	530x1829	24	10.9	2172NBL	2172NW	2172N-DSG	2172NF	2172N-D
24x24	610x610	9	4.1	2424NBL	2424NW	2424N-DSG	2424NF	2424N-D
24x30	610x760	11	5.0	2430NBL	2430NW	2430N-DSG	2430NF	2430N-D
24x36	610x914	13	5.9	2436NBL	2436NW	2436N-DSG	2436NF	2436N-D
24x42	610x1066	15	6.8	2442NBL	2442NW	2442N-DSG	2442NF	2442N-D
24x48	610x1219	16	7.3	2448NBL	2448NW	2448N-DSG	2448NF	2448N-D
24x54	610x1370	19	8.6	2454NBL	2454NW	2454N-DSG	2454NF	2454N-D
24x60	610x1524	21	9.5	2460NBL	2460NW	2460N-DSG	2460NF	2460N-D
24x72	610x1829	26	11.8	2472NBL	2472NW	2472N-DSG	2472NF	2472N-D

Note: White epoxy Super Erecta shelves come with white split sleeves.


Note: All Black, Smoked Glass and Designer Super Erecta shelves come with black split sleeves.

Note: Black shelving is NSF listed. White, Smoked Glass, and Designer Colors are not NSF listed.

## Posts — {10.14}

Height* (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		STATIONARY					MOBILE (FOR STEM CASTERS)					
				Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Flame†	Cat. No. Designer Colors*†	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Flame†	Cat. No. Designer Colors*†
7½	191	½	0.3	7PBL	7PW	7P-DSG	7PF	7P-D	—	—	—	—	—	
14½	370	1	0.5	13PBL	13PW	13P-DSG	13PF	13P-D	—	—	—	—	—	
27½	699	1¾	0.75	27PBL	27PW	27P-DSG	27PF	27P-D	1¾	0.75	27UPBL	27UPW	27UP-DSG	27UPF 27UP-D
34½	875	2	0.9	33PBL	33PW	33P-DSG	33PF	33P-D	2	0.9	33UPBL	33UPW	33UP-DSG	33UPF 33UP-D
54⅞	1385	3	1.4	54PBL	54PW	54P-DSG	54PF	54P-D	3	1.4	54UPBL	54UPW	54UP-DSG	54UPF 54UP-D
62⅞	1590	3½	1.6	63PBL	63PW	63P-DSG	63PF	63P-D	3½	1.6	63UPBL	63UPW	63UP-DSG	63UPF 63UP-D
74⅞	1895	4	1.8	74PBL	74PW	74P-DSG	74PF	74P-D	4	1.8	74UPBL	74UPW	74UP-DSG	74UPF 74UP-D
86⅞	2200	5	2.3	86PBL	86PW	86P-DSG	86PF	86P-D	4.5	2.0	86UPBL	86UPW	86UP-DSG	86UPF 86UP-D

†Contact your Metro representative for pricing on Stationary and Mobile Designer Color Posts.

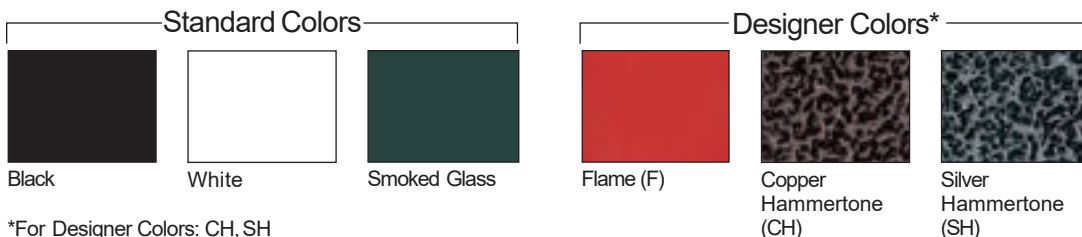

\*For Designer Colors: CH, SH


\*To order a Designer Color, add the appropriate color suffix to the desired catalog numbers above.

Example: 18" x 36" (457 x 914mm) Copper Hammertone Shelf = 1836N-DCH  
74" (1880mm) stationary Copper Hammertone Post = 74P-DCH.



## Shelving Starter and Add-On Units — {10.90}

- Starter Units consist of four posts and indicated number of Super Erecta shelves.
- Add-On Units consist of two posts, indicated number of shelves, and two “S” Hooks per shelf, for attaching shelf to adjacent unit.

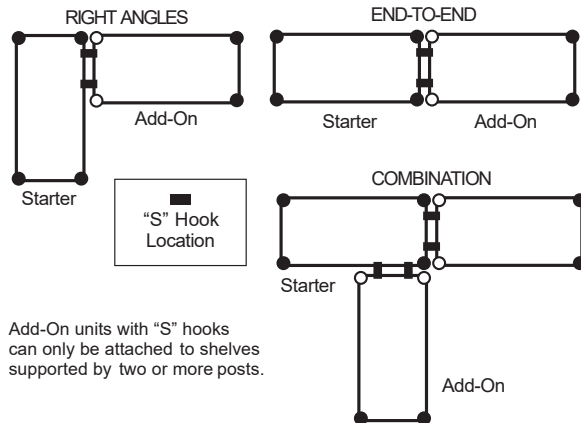

For additional wire shelves, order from page 42.

## Easy Order — Chrome Finish

Chrome Four-Tier Unit with 63" posts

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
18x24	457x610	N316C	35.0 15.9	AN316C
18x30	457x760	N326C	40.0 18.1	AN326C
18x36	457x914	N336C	46.0 20.9	AN336C
18x42	457x1060	N346C	50.0 22.7	AN346C
18x48	457x1219	N356C	56.0 25.4	AN356C
18x60	457x1524	N366C	75.0 34.0	AN366C
18x72	457x1829	N376C	87.0 39.5	AN376C
21x24	530x610	N416C	39.0 20.9	AN416C
21x30	530x760	N426C	45.0 23.6	AN426C
21x36	530x914	N436C	52.0 26.8	AN436C
21x42	530x1060	N446C	58.0 29.5	AN446C
21x48	530x1219	N456C	64.0 32.2	AN456C
21x60	530x1524	N466C	81.0 39.9	AN466C
21x72	530x1829	N476C	92.0 44.5	AN476C
24x24	610x610	N516C	43.0 19.5	AN516C
24x30	610x760	N526C	50.0 22.7	AN526C
24x36	610x914	N536C	58.0 26.3	AN536C
24x42	610x1060	N546C	65.0 29.5	AN546C
24x48	610x1219	N556C	72.0 32.7	AN556C
24x60	610x1524	N566C	91.0 41.3	AN566C
24x72	610x1829	N576C	113.0 51.3	AN576C

Actual Dimensions: Width: Add 1/8" (3.2mm) to nominal size.  
Length: Subtract 1/8" (3.2mm) from nominal size.

Chrome Five-Tier Unit with 74" posts

Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Add-On Unit
51.0 23.1	5N317C	43.0 19.5	5AN317C
58.0 26.3	5N327C	50.0 22.7	5AN327C
65.0 29.5	5N337C	57.0 25.9	5AN337C
70.0 31.8	5N347C	62.0 28.1	5AN347C
78.0 35.4	5N357C	70.0 31.8	5AN357C
102.0 46.3	5N367C	93.0 42.2	5AN367C
117.0 53.1	5N377C	108.0 49.0	5AN377C
57.0 25.9	5N417C	48.0 21.8	5AN417C
64.0 29.0	5N427C	56.0 25.4	5AN427C
73.0 33.1	5N437C	65.0 29.5	5AN437C
81.0 36.7	5N447C	73.0 33.1	5AN447C
88.0 39.9	5N457C	80.0 36.3	5AN457C
109.0 49.4	5N467C	101.0 45.8	5AN467C
122.0 55.3	5N477C	113.0 51.3	5AN477C
62.0 28.1	5N517C	53.0 24.0	5AN517C
71.0 32.2	5N527C	62.0 28.1	5AN527C
81.0 36.7	5N537C	73.0 33.1	5AN537C
89.0 40.4	5N547C	81.0 36.7	5AN547C
98.0 44.5	5N557C	90.0 40.8	5AN557C
122.0 55.3	5N567C	113.0 51.3	5AN567C
149.0 67.6	5N577C	141.0 64.0	5AN577C



### Replacement “S” Hook

2 are required for each storage level.  
Cat. No. 9995Z



### Security “S” Hook

2 are required for each storage level. Bag of 2.  
Chrome. Cat. No. H9995C  
Black. Cat. No. H9995B





# SUPER ERECTA® STARTER AND ADD-ON UNITS

## Easy Order — Brite Finish

Brite Four-Tier Unit with 63" posts									
Nominal Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Add-On Unit		
18x24	457x610	42.0	19.1	N316BR	35.0	15.9	AN316BR		
18x30	457x760	47.0	21.3	N326BR	40.0	18.1	AN326BR		
18x36	457x914	53.0	24.0	N336BR	46.0	20.9	AN336BR		
18x42	457x1060	57.0	25.9	N346BR	50.0	22.7	AN346BR		
18x48	457x1219	63.0	28.6	N356BR	56.0	25.4	AN356BR		
18x60	457x1524	82.0	37.2	N366BR	75.0	34.0	AN366BR		
18x72	457x1829	94.0	42.6	N376BR	87.0	39.5	AN376BR		
21x24	530x610	46.0	20.9	N416BR	39.0	20.9	AN416BR		
21x30	530x760	52.0	23.6	N426BR	45.0	23.6	AN426BR		
21x36	530x914	59.0	26.8	N436BR	52.0	26.8	AN436BR		
21x42	530x1060	65.0	29.5	N446BR	58.0	29.5	AN446BR		
21x48	530x1219	71.0	32.2	N456BR	64.0	32.2	AN456BR		
21x60	530x1524	88.0	39.9	N466BR	81.0	39.9	AN466BR		
21x72	530x1829	98.0	44.5	N476BR	92.0	44.5	AN476BR		
24x24	610x610	50.0	22.7	N516BR	43.0	19.5	AN516BR		
24x30	610x760	57.0	25.9	N526BR	50.0	22.7	AN526BR		
24x36	610x914	65.0	29.5	N536BR	58.0	26.3	AN536BR		
24x42	610x1060	72.0	32.7	N546BR	65.0	29.5	AN546BR		
24x48	610x1219	79.0	35.8	N556BR	72.0	32.7	AN556BR		
24x60	610x1524	98.0	44.5	N566BR	91.0	41.3	AN566BR		
24x72	610x1829	120.0	54.4	N576BR	113.0	51.3	AN576BR		

Actual Dimensions: Width: Add 1/8" (3.2mm) to nominal size.  
Length: Subtract 1/8" (3.2mm) from nominal size.

Brite Five-Tier Unit with 74" posts									
Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Starter Unit		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Add-On Unit			
51.0	23.1	5N317BR		43.0	19.5	5AN317BR			
58.0	26.3	5N327BR		50.0	22.7	5AN327BR			
65.0	29.5	5N337BR		57.0	25.9	5AN337BR			
70.0	31.8	5N347BR		62.0	28.1	5AN347BR			
78.0	35.4	5N357BR		70.0	31.8	5AN357BR			
102.0	46.3	5N367BR		93.0	42.2	5AN367BR			
117.0	53.1	5N377BR		108.0	49.0	5AN377BR			
57.0	25.9	5N417BR		48.0	21.8	5AN417BR			
64.0	29.0	5N427BR		56.0	25.4	5AN427BR			
73.0	33.1	5N437BR		65.0	29.5	5AN437BR			
81.0	36.7	5N447BR		73.0	33.1	5AN447BR			
88.0	39.9	5N457BR		80.0	36.3	5AN457BR			
109.0	49.4	5N467BR		101.0	45.8	5AN467BR			
122.0	55.3	5N477BR		113.0	51.3	5AN477BR			
62.0	28.1	5N517BR		53.0	24.0	5AN517BR			
71.0	32.2	5N527BR		62.0	28.1	5AN527BR			
81.0	36.7	5N537BR		73.0	33.1	5AN537BR			
89.0	40.4	5N547BR		81.0	36.7	5AN547BR			
98.0	44.5	5N557BR		90.0	40.8	5AN557BR			
122.0	55.3	5N567BR		113.0	51.3	5AN567BR			
149.0	67.6	5N577BR		141.0	64.0	5AN577BR			

## Easy Order — Metroseal 3 Finish



Metroseal 3 Four-Tier Unit with 63" posts									
Nominal Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Starter Unit	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Add-On Unit		
18x24	457x610	42.0	19.1	N316K3	35.0	15.9	AN316K3		
18x30	457x760	47.0	21.3	N326K3	40.0	18.1	AN326K3		
18x36	457x914	53.0	24.0	N336K3	46.0	20.9	AN336K3		
18x42	457x1060	57.0	25.9	N346K3	50.0	22.7	AN346K3		
18x48	457x1219	63.0	28.6	N356K3	56.0	25.4	AN356K3		
18x60	457x1524	82.0	37.2	N366K3	75.0	34.0	AN366K3		
18x72	457x1829	94.0	42.6	N376K3	87.0	39.5	AN376K3		
21x24	530x610	46.0	20.9	N416K3	46.0	20.9	AN416K3		
21x30	530x760	52.0	23.6	N426K3	52.0	23.6	AN426K3		
21x36	530x914	59.0	26.8	N436K3	59.0	26.8	AN436K3		
21x42	530x1060	65.0	29.5	N446K3	65.0	29.5	AN446K3		
21x48	530x1219	71.0	32.2	N456K3	71.0	32.2	AN456K3		
21x60	530x1524	88.0	39.9	N466K3	88.0	39.9	AN466K3		
21x72	530x1829	98.0	44.5	N476K3	98.0	44.5	AN476K3		
24x24	610x610	50.0	22.7	N516K3	43.0	19.5	AN516K3		
24x30	610x760	57.0	25.9	N526K3	50.0	22.7	AN526K3		
24x36	610x914	65.0	29.5	N536K3	58.0	26.3	AN536K3		
24x42	610x1060	72.0	32.7	N546K3	65.0	29.5	AN546K3		
24x48	610x1219	79.0	35.8	N556K3	72.0	32.7	AN556K3		
24x60	610x1524	98.0	44.5	N566K3	91.0	41.3	AN566K3		
24x72	610x1829	120.0	54.4	N576K3	113.0	51.3	AN576K3		

Actual Dimensions: Width: Add 1/8" (3.2mm) to nominal size.  
Length: Subtract 1/8" (3.2mm) from nominal size.

Metroseal 3 Five-Tier Unit with 74" posts									
Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Starter Unit		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Add-On Unit			
51.0	23.1	5N317K3		43.0	19.5	5AN317K3			
58.0	26.3	5N327K3		50.0	22.7	5AN327K3			
65.0	29.5	5N337K3		57.0	25.9	5AN337K3			
70.0	31.8	5N347K3		62.0	28.1	5AN347K3			
78.0	35.4	5N357K3		70.0	31.8	5AN357K3			
102.0	46.3	5N367K3		93.0	42.2	5AN367K3			
117.0	53.1	5N377K3		108.0	49.0	5AN377K3			
57.0	25.9	5N417K3		48.0	21.8	5AN417K3			
64.0	29.0	5N427K3		56.0	25.4	5AN427K3			
73.0	33.1	5N437K3		65.0	29.5	5AN437K3			
81.0	36.7	5N447K3		73.0	33.1	5AN447K3			
88.0	39.9	5N457K3		80.0	36.3	5AN457K3			
109.0	49.4	5N467K3		101.0	45.8	5AN467K3			
122.0	55.3	5N477K3		113.0	51.3	5AN477K3			
62.0	28.1	5N517K3		53.0	24.0	5AN517K3			
71.0	32.2	5N527K3		62.0	28.1	5AN527K3			
81.0	36.7	5N537K3		73.0	33.1	5AN537K3			
89.0	40.4	5N547K3		81.0	36.7	5AN547K3			
98.0	44.5	5N557K3		90.0	40.8	5AN557K3			
122.0	55.3	5N567K3		113.0	51.3	5AN567K3			
149.0	67.6	5N577K3		141.0	64.0	5AN577K3			

Add-on units with "S" hooks can only be attached to shelvessupported by two or more posts.


Indicates antimicrobial product.



Convenience Pakunit  
in Chrome finish

## Super Erecta® Convenience Pak™—{10.03}

- Providing a complete shelving unit in a single box, ConveniencePak shelving is the easy-to-order alternative to separate shelving components.
- Available in SuperErecta Brite, chrome and Metroseal 3 finishes.

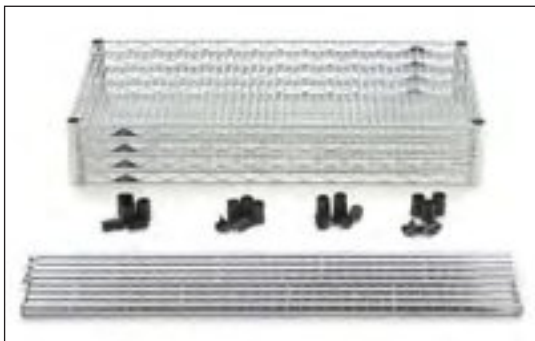


Unassembled Convenience Pak™  
Each pack includes four shelves with split sleeves and four split posts with threaded connectors and leveling feet.

Width/Length/Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®
18x36x74 1/2	457x914x1890	51	23	EZ1836BR-4	EZ1836NC-4	EZ1836NK3-4
18x48x74 1/2	457x1219x1890	63	28.5	EZ1848BR-4	EZ1848NC-4	EZ1848NK3-4
18x60x74 1/2	457x1524x1890	82	37	EZ1860BR-4	EZ1860NC-4	EZ1860NK3-4
24x36x74 1/2	610x914x1890	66	30	EZ2436BR-4	EZ2436NC-4	EZ2436NK3-4
24x48x74 1/2	610x1219x1890	76	34.5	EZ2448BR-4	EZ2448NC-4	EZ2448NK3-4
24x60x74 1/2	610x1524x1890	102	46	EZ2460BR-4	EZ2460NC-4	EZ2460NK3-4

## Heavy-Duty Dunnage Shelves —{10.45}

Enhance the weight-bearing capacity of your system.

- 36" (914mm) shelf holds 1,600 pounds (725kg) (uniformly distributed); 48" (1219mm) shelves carry up to 1,300 pounds (590kg); 60" (1524mm) shelves bear up to 1,000 pounds (453kg).
- Removable wire mat: Lifts off for easy cleaning. 5/16" (7.9mm) diameter wire.
- Support frames: 1" (25mm) square tubing.



Dunnage Shelf

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
18x24	457x610	14	6.3	1824DRC	1824DRK3	—
18x30	457x760	18	8.1	1830DRC	1830DRK3	—
18x36	457x914	21	9.4	1836DRC	1836DRK3	1836DRS
18x48	457x1219	28	12.6	1848DRC	1848DRK3	1848DRS
18x60	457x1524	34	15.3	1860DRC	1860DRK3	1860DRS
24x24	610x610	16	7.2	2424DRC	2424DRK3	—
24x30	610x760	20	9.0	2430DRC	2430DRK3	—
24x36	610x914	24	10.8	2436DRC	2436DRK3	2436DRS
24x48	610x1219	30	13.5	2448DRC	2448DRK3	2448DRS
24x60	610x1524	37	16.6	2460DRC	2460DRK3	2460DRS

**Important:** In stationary shelving, stability decreases as the ratio of height to width increases and when heavier loads are placed on upper shelves. Shelving stability is attained by keeping units as wide and low as possible, and placing heavy loads low on the shelving unit.

## Cantilever Shelves —{10.05}

Adds convenient space above a storage unit. Drop mat design creates a retaining ledge around the entire 12" (305mm) deep shelf. Remember to order rear posts taller than front posts to accommodate these shelves.



Cantilever Shelves

Length (in.) (mm)		Approx. Pkd. Wt. Each (lbs.) (kg)		Cat. No. Chrome	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
24	610	4 1/2	2.0	1224CSNC	1224CSNBL	1224CSNW	1224CSN-DSG
30	750	5	2.3	1230CSNC	1230CSNBL	1230CSNW	1230CSN-DSG
36	914	5 3/4	2.6	1236CSNC	1236CSNBL	1236CSNW	1236CSN-DSG
42	1066	6 3/4	3.1	1242CSNC	1242CSNBL	1242CSNW	1242CSN-DSG
48	1219	7 1/4	3.5	1248CSNC	1248CSNBL	1248CSNW	1248CSN-DSG
60	1524	9 1/2	4.3	1260CSNC	1260CSNBL	1260CSNW	1260CSN-DSG

✓ Indicates antimicrobial product.

### Foot Plates — {10.06}

Use to bolt units to the floor, or when a broader, more stable foot is desired.  
Zinc. Cat. No. 9993Z

Stainless Steel.

Cat. No. 9993S

Black. Cat. No. 9993BL



### Glides — {10.06}

Smooth polymer coverfits over leveling bolt to protect floors.

Cat. No. 9991P



### Decorative Leveling Foot — {10.06}

Decorative alternative for post. Compensates for uneven surfaces.

Chrome. Cat. No. HDFC

Black. Cat. No. HDFB



### Wall Clamp — {10.06}

- Use to secure a stationary unit to the wall for greater stability. Plated finish.

- Compatible with Super Erecta wire shelves and Super Adjustable Super Erecta wire shelves.

Cat. No. 9984C



### Post Clamps — {10.06}

Join units together for maximum strength.

Zinc-plated. Cat. No. 9994Z

Black. Cat. No. 9994BL



### Aluminum Split Sleeves — {10.06}

For high temperature, over the road, or conductive applications. Zinc or stainless steel retainer rings available to secure shelf. One bag required per shelf; 4 pairs per bag.



	Cat. No.
Aluminum Split Sleeves with Zinc Rings	<b>9986Z</b>
Aluminum Split Sleeves with Stainless Rings	<b>9986S</b>

### Replacement Plastic Split Sleeves — {10.06}

One bag required per shelf; 4 pairs per bag.



Black Split Sleeve



White Split Sleeve

	Cat. No.
Black Plastic Split Sleeves	<b>9985</b>
White Plastic Split Sleeves	<b>9985W</b>

**Note:** White post caps and white split sleeves are standard with white designer shelving only.

### Replacement Super Adjustable Kit — {10.06}

Package includes 4 wedges, 4 sleeves, and 4 corner releases.

Cat. No. SAKITA2



### Basket Shelf — {10.04}

3 1/2" (89mm) deep basket with 400 lb. (182kg) weight capacity. Ideal for containing and displaying smaller items.

(in.)	Size (mm)	Cat. No. Chrome	Cat. No. Black
14x36	355x914	—	<b>DD3448A</b>
14x48	355x1219	—	<b>DD3448B</b>
18x36	457x914	<b>CC9744A</b>	<b>CC9744C</b>
18x48	457x1219	<b>CC9744</b>	<b>CC9744B</b>



Basket Shelf  
(Posts sold separately, see page 42)

## Super Erecta Mobile Shelving and Transport Carts

### Stem Caster Carts (Standard-Duty Mobile Shelving)

- The most common configuration for mobile shelving.
- They are primarily used for applications where the shelving is periodically moved to clean or to transport goods short distances within a facility.
- The weight capacity of the cart is determined by the casters. Typical configurations range from 600-900 lbs. (272-363kg) total unit capacity.

### Dolly Trucks (Heavy-Duty Mobile Shelving)

- Carts configured with dolly bases are recommended for heavier duty applications. The dolly base is shock absorbent and the heavier duty plate casters are designed to withstand abusive conditions.
- Dolly trucks are recommended when the carts must travel longer distances, over thresholds, and/or between facilities on a regular basis.
- Dolly trucks can transport up to 1,000 lbs. (454kg) evenly distributed.



Safely Hold up to  
**600-900 lbs.**  
per mobile unit.



**HIGH TRAFFIC. EXTREME IMPACT.**

Safely Hold up to  
**1000 lbs.**  
per mobile unit.



Wire Stem  
Caster Cart

### Stem Caster Carts — Wire — {11.01}

Open-wire shelf design minimizes dust and increases air circulation and visibility. Casters included.

Overall Height 67<sup>7</sup>/<sub>8</sub>" (1724mm). Carts are configured with 63UP posts.

Shelf Width/Length (in.)	Shelf Width/Length (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Super Erecta Brite Finish		Chrome Finish	
			Two Swivel Two Brake Resilient Rubber Casters	Two Swivel Two Brake Polyurethane Casters	Two Swivel Two Brake Resilient Rubber Casters	Two Swivel Two Brake Polyurethane Casters
18x36	457x914	60 27	N336BBR	N336EBR	N336BC	N336EC
18x48	457x1219	72 32	N356BBR	N356EBR	N356BC	N356EC
18x60	457x1524	88 40	N366BBR	N366EBR	N366BC	N366EC
21x36	530x914	69 31	N436BBR	N436EBR	N436BC	N436EC
21x48	530x1219	81 36	N456BBR	N456EBR	N456BC	N456EC
21x60	530x1524	98 44	N466BBR	N466EBR	N466BC	N466EC
24x36	610x914	76 34	N536BBR	N536EBR	N536BC	N536EC
24x48	610x1219	92 41	N556BBR	N556EBR	N556BC	N556EC
24x60	610x1524	112 51	N566BBR	N566EBR	N566BC	N566EC

**Note:** Models with Resilient Rubber casters can hold up to 600 lbs. (272kg) evenly distributed. Models with Polyurethane casters can hold up to 900 lbs. (409kg) evenly distributed.



Solid Stem Caster  
with galvanized shelves

### Stem Caster Carts — Solid — {11.10}

- Consist of four shelves, posts, plastic split sleeves, donut bumpers and 5" (127mm) poly casters (2 swivel; 2 brake).
- Strong and versatile
- Solid Shelf Stem Caster Carts feature a 1/8" (3mm) raised "ship's edge" around perimeter of shelves to help contain spillage.

With Four Galvanized Flat Shelves and Chrome-Plated Posts

63" (1600mm) Posts—Overall Height 67<sup>7</sup>/<sub>8</sub>" (1724mm)

Shelf Width/Length (in.)	Shelf Width/Length (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
24x36	610x914	100 45	F536EG
24x48	610x1219	124 56	F556EG
24x60	610x1524	152 69	F566EG

**Note:** Models are designed to hold up to 900 lbs. (363kg) evenly distributed.



**Super Erecta Trucks — With Super Erecta Chrome Wire Shelves—**  
63" (1600mm) Plated Posts and Aluminum Dolly

Consists of four shelves, posts, plastic split sleeves, donut bumpers and 5" (127mm), resilient rubber or poly casters as designated.

Shelf Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Catalog Number with Casters		
		Two B5DN Two B5DNB	Two B5P Two B5PB	Two 6P Set BL6P
24x36 610x914	96 43	<b>N536JC</b>	<b>N536LC</b>	<b>N536MC</b>
24x48 610x1219	118 53	<b>N556JC</b>	<b>N556LC</b>	<b>N556MC</b>
24x60 610x1524	142 64	<b>N566JC</b>	<b>N566LC</b>	<b>N566MC</b>

Overall heights: JC, LC models — 68<sup>7</sup>/<sub>16</sub>" (1739mm), MC models — 70<sup>1</sup>/<sub>16</sub>" (1800mm).

- JC models: Standard swivel plate casters, two with brake; resilient rubber tread.
- LC models: Standard swivel plate casters, two with brake; polyurethane tread.
- MC models: Larger plate casters; two swivel; one swivel/brake set; polyurethane tread.



Super Erecta Wire Truck

**Slanted Shelf Trucks and Carts — {31.05}**

Shelves slope backwards 2" (51mm) to keep items from falling during transport. Standard-duty carts have four poly stem casters. Heavy-duty trucks are dolly mounted.

Width/Length (in.) (mm)	Height (in.) (mm)	No. Shelves	Castors	Description	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
24x36 610x914	62 <sup>1</sup> / <sub>16</sub> 1577	3	2-BL6P, 2-6P	Heavy-Duty	140 63	<b>AST35MC</b>
24x48 610x1219	62 <sup>1</sup> / <sub>16</sub> 1577	3	2-BL6P, 2-6P	Heavy-Duty	162 72.4	<b>AST55MC</b>
24x60 610x1524	62 <sup>1</sup> / <sub>16</sub> 1577	3	2-BL6P, 2-6P	Heavy-Duty	187 84.1	<b>AST65MC</b>
24x36 610x914	59 <sup>7</sup> / <sub>8</sub> 1521	3	4-Poly Casters	Standard-Duty	105 47.2	<b>AST35DC</b>
24x48 610x1219	59 <sup>7</sup> / <sub>8</sub> 1521	3	4-Poly Casters	Standard-Duty	125 56.2	<b>AST55DC</b>
24x60 610x1524	59 <sup>7</sup> / <sub>8</sub> 1521	3	4-Poly Casters	Standard-Duty	150 67.5	<b>AST65DC</b>

**Additional Slanted Shelves**

Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome
24x36 610x914	13 6	<b>SLT2436NC</b>
24x48 610x1219	17 8	<b>SLT2448NC</b>
24x60 610x1524	22 10	<b>SLT2460NC</b>

**Handles — {11.40}**

Use on corresponding width Super Erecta units to provide additional maneuverability to dolly carts or stem caster carts. Aluminum split sleeves included for attaching to cart.

Length (in.) (mm)	Cat. No. Chrome	Push Handles		Extended Handles	
		Cat. No. Stainless	Cat. No. Chrome	Cat. No. Stainless	Cat. No. Chrome
14 355	<b>PH14NC</b>	<b>PH14NS</b>	<b>EH14NC</b>	<b>EH14NS</b>	
18 457	<b>PH18NC</b>	<b>PH18NS</b>	<b>EH18NC</b>	<b>EH18NS</b>	
21 530	<b>PH21NC</b>	<b>PH21NS</b>	<b>EH21NC</b>	<b>EH21NS</b>	
24 610	<b>PH24NC</b>	<b>PH24NS</b>	<b>EH24NC</b>	<b>EH24NS</b>	
30 760	<b>PH30NC</b>		<b>EH30NC</b>		
36 914	<b>PH36NC</b>		<b>EH36NC</b>		

Note: Handles fit unit widths only. Extended handles add 6" (152.4mm) to length of unit.



Push Handle



Extended Handle

## Stem Casters — {11.20}

Use with Super Erecta posts and shelves (see pages 37 and 42) to create a mobile shelving unit to meet your special needs. Stem casters are shipped with donut bumper at no additional charge.



5LD



5MB



5MDBA



5MPB



5MPR



5PC



5PCB



5MDGSA



5MHTPB



5MHTNB



Swaged Post

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Wheel Tread	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
4	102	125 56	Stem/Swivel	Resilient Donut	-30°-160° -34°-71°	1 1/2 0.6	4LD
5	127	125 56	Stem/Swivel	Resilient Donut	-30°-160° -34°-71°	2 0.9	5LD
5	127	200 90	Stem/Swivel	Resilient, Flat	-30°-160° -34°-71°	2 1/2 1.1	5M
5	127	200 90	Stem/Brake	Resilient, Flat	-30°-160° -34°-71°	2 5/8 1.2	5MB
5	127	200 90	Stem/Rigid	Resilient, Flat	-30°-160° -34°-71°	3 1/2 1.5	5MR
5	127	250 113	Stem/Swivel	High Modulus Donut	-40°-180° -40°-82°	2 1/2 1.1	5MDA
5	127	250 113	Stem/Brake	High Modulus Donut	-40°-180° -40°-82°	2 5/8 1.2	5MDBA
5	127	250 113	Stem/Rigid	High Modulus Donut	-40°-180° -40°-82°	2 3/8 1.1	5MDRA
5	127	300 135	Stem/Swivel	Polyurethane, Flat	-30°-180° -34°-82°	2 1/4 0.9	5MP
5	127	300 135	Stem/Brake	Polyurethane, Flat	-30°-180° -34°-82°	2 1/4 1	5MPB
5	127	300 135	Stem/Rigid	Polyurethane, Flat	-30°-180° -34°-82°	2 0.9	5MPR
6	152	400 182	Stem/Swivel	Polyurethane, Flat	-30°-180° -34°-82°	2 1/4 1.1	6MP
6	152	400 182	Stem/Brake	Polyurethane, Flat	-30°-180° -34°-82°	2 1/2 0.9	6MPB
6	152	400 182	Stem/Rigid	Polyurethane, Flat	-30°-180° -34°-82°	2 1/4 1	6MPR

**Note 1:** Rigid casters are held in place by a connecting channel. When ordering, shelf width must be provided. Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS, 30RS, or 36RS.

**Note 2:** Load Height for all 5M and 5MP casters — 6 3/32" ± 1/16" (155 ± 1.5mm).

**Note 3:** Load Height for 4LD caster — 4 5/8" ± 1/16" (118 ± 1.5mm).

**Note 4:** Load Height for 5LD caster — 5 5/8" ± 1/16" (143 ± 1.5mm).

**Note 5:** Brakes are foot-operated.

Rigid stem casters are often ordered two per unit for improved tracking and handling. Rigid caster channels are provided with each two rigid stem casters at no charge.

## Polymer Casters — {11.20}

Innovative polymer stem casters offer corrosion resistance and enhanced durability. Appropriate for all medium-duty mobile applications. Donut bumpers included.

- All-polymer horn, stainless axle, and hardware.
- 5" (127mm) diameter polyurethane, flat wheel tread.
- Sleeve style axle bearing and optional toe-operated brake mechanism

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Wheel Tread	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.	Cat. No. Antimicrobial
5	127	300 135	Stem/Swivel	Polyurethane, Flat	-20°-120° -29°-49°	2 0.9	5PC	5PCM
5	127	300 135	Stem/Brake	Polyurethane, Flat	-20°-120° -29°-49°	2 0.9	5PCB	5PCBM
5	127	300 135	Stem/Rigid	Polyurethane, Flat	-20°-120° -29°-49°	2 0.9	5PCR	

**Note 1:** Rigid casters are held in place by a connecting channel. When ordering, shelf width must be provided. Rigid connecting channel (aluminum) for 5PCR casters: Cat. No. P14RC, P18RC, P21RC, P24RC, P30RC, or P36RC.

**Note 2:** Not suitable for cart wash and autoclave applications.

## Stainless Steel Cart-Washable Stem Casters — {11.20}

Stem casters are shipped with donut bumpers at no extra charge.

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Wheel Tread	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
5	127	250 113	Stem/Swivel	High Modulus Donut	-40°-180° -40°-82°	2 1/2 1.1	5MDGSA
5	127	250 113	Stem/Brake	High Modulus Donut	-40°-180° -40°-82°	2 5/8 1.2	5MDBGSA
5	127	250 113	Stem/Rigid	High Modulus Donut	-40°-180° -40°-82°	2 3/8 1.1	5MDRGSA
5	127	300 135	Stem/Swivel	Polyurethane, Flat	-30°-180° -34°-82°	2 1/8 0.9	5MPGSA
5	127	300 135	Stem/Brake	Polyurethane, Flat	-30°-180° -34°-82°	2 1/4 1	5MPBGSA
5	127	300 135	Stem/Rigid	Polyurethane, Flat	-30°-180° -34°-82°	2 0.9	5MPRGSA

**Note 1:** Rigid casters are held in place by a connecting channel. When ordering, shelf width must be provided. Rigid connecting channel (stainless steel): Cat. No. 14RS, 18RS, 21RS, 24RS, 30RS, or 36RS.

**Note 2:** Load Height for all 5MD and 5MP casters — 6 3/32" ± 1/16" (155 ± 1.5mm).

**Note 3:** All casters are grease sealed with zerk fittings in swivel and axle.

**Note 4:** Brakes are foot-operated.

## High-temperature Autoclave Stem Casters

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Wheel Tread	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
5	127	300 135	Stem/Swivel	Phenolic, Flat	-45°-475° -43°-250°	2 1/5 1	5MHTP
5	127	300 135	Stem/Brake	Phenolic, Flat	-45°-475° -43°-250°	2 1/5 1.3	5MHTPB
5	127	300 135	Stem/Swivel	Nylon, Flat	-20°-475° -29°-250°	2 2/5 1.1	5MHTN
5	127	300 135	Stem/Brake	Nylon, Flat	-20°-475° -29°-250°	3 1.4	5MHTNB

## Swaged Posts — For cart wash and autoclave applications

Each Type 304 stainless post has an aluminum cap swaged into the top of the post. For use with standard stem casters.

Description	Dimensions (in.) (mm)	Cat. No.
Stem Caster Post	33 875	33UPS-SW
Stem Caster Post	54 1370	54UPS-SW
Stem Caster Post	63 1600	63UPS-SW

**Note:** For special height posts, please consult your Metro representative.

✓ Indicates antimicrobial product.



3TM



3TMB

## Low Profile 3" Casters —{11.20}

Ideal for creating shorter height mobile units for undercounter use. Threaded stem fits stationary posts with threaded base. (Remove leveling foot and install caster)

Wheel Diameter (in.) (mm)	Face (in.) (mm)	Load Rating (lbs.) (kg)	Type	Wheel Thread	Temperature Range (Continuous Usage) (Fahrenheit) (Celsius)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
3 7/8	15/16	24	100 45	Threaded Stem, Swivel	Resilient Rubber	-30° - 160° -34° - 71°	1.0 .45 <b>3TM</b>
3 7/8	15/16	24	100 45	Threaded Stem, Swivel/Brake	Resilient Rubber	-30° - 160° -34° - 71°	1.1 .50 <b>3TMB</b>

**Note 1:** Not intended for carts that travel long distances.



Donut Bumper

## Donut Bumpers —{11.40}

- Non-phthalate, flexible vinyl material

Diameter (in.) (mm)	Height (in.) (mm)	Weight (lbs.) (kg)	Cat. No.
3 1/2	89	3/4 19	<b>9992DB*</b>
5 1/2	140	1 3/16 21	<b>9992N</b>

\*Included with each Super Erecta stem caster as noted on previous page.

## Decorative Casters —{10.06}

- Black nylon housing with non-marking polymer tread.
- 2 1/2" (63mm) models have threaded stem and attach to stationary shelving posts.
- 4" (100mm) casters include threaded insert for use with mobile posts.



HDC5B

HDC5BB

Type	Diameter (in.) (mm)	Fits Post Type	Cat. No.
Swivel/Brake	2 1/2 63	Stationary	<b>HDC3BB</b>
Swivel	4 100	Mobile	<b>HDC5B</b>
Swivel/Brake	4 100	Mobile	<b>HDC5BB</b>


Castors shipped with post inserts (as shown left) for adaptability to mobile posts.

The following information is to assist you in the selection of the appropriate caster for your specific application. Remember, the selection of the proper caster is determined by the load requirements, the operating environment, and other special conditions.


Wheel Material	Resistance to Oil & Grease	Rollability	Floor Protection	Noise
Resilient Rubber	<b>LOW</b>	<b>FAIR</b>	<b>GOOD</b>	<b>LOW</b>
Neoprene	<b>HIGH</b>	<b>GOOD</b>	<b>GOOD</b>	<b>LOW</b>
Polyurethane	<b>HIGH</b>	<b>GOOD</b>	<b>GOOD</b>	<b>MODERATE</b>
High-Modulus Rubber	<b>HIGH</b>	<b>GOOD</b>	<b>GOOD</b>	<b>LOW</b>
Conductive	<b>LOW</b>	<b>FAIR</b>	<b>GOOD</b>	<b>LOW</b>

### Caster Tips:

- The total weight of the equipment and its load should not exceed three times the load rating per caster.
- Given the same wheel material, the larger the wheel diameter, the greater the load capacity and the better the rollability.
- Caster mounting patterns affect maneuverability and steering of the equipment.



For maneuverability, use 4 swivel casters.



For steering control use 2 swivel and 2 rigid casters.

- Plate casters generally have wheels of larger diameter and can usually carry more weight and take more abuse than stem casters.
- Ball bearings and roller bearings in the wheel generally perform better and carry more weight than engineered plastic bearings or sintered metal bearings. Metro stem casters in the SMP and the SMDA series have ball bearings in the swivel and the wheel. Most plate casters have ball bearings in the swivel and ball or roller bearings in the wheel.
- Wheel tread shapes are generally flat, rounded or tapered. Tapered wheels, like donut-shaped wheels, tend to roll more easily. High-modulus donut wheels offer resiliency and mobility, reduce noise, and absorb shock on uneven or rough floors.

*Additional stem and plate casters, in various sizes, are available.*

## Made-to-Order Truck Dollies (Aluminum)\* —{11.37}

Select the desired dolly size from the chart below and combine with the desired plate casters found on page 53.

The caster plate style must be specified at the time of order — "B" or "C" plate. The dollies are modified at the factory prior to shipment. For example, D2448NCB, four #B5P = one aluminum dolly frame with four 5" B-plate swivel polyurethane casters designed to accommodate nominal 24" x 48" (610 x 1219mm) shelves.



Dolly Frame

### Metro Fact:

Metro dolly frames and stock truck dollies add 3 1/8" (78mm) to the length of the unit and 3 3/8" (87mm) to the unit width.

Stainless steel frames and staked posts are recommended for heavy-duty applications.

### Truck Dolly Frames

Shelf Width/Length (in.) (mm)	ALUMINUM		STAINLESS	
	Cat. No. with Corner Bumper	Cat. No. with Wraparound Bumper	Cat. No. with Corner Bumper	Cat. No. with Wraparound Bumper
18x24 457x610	D1824NCB	D1824NP	D1824SCB	D1824SP
18x30 457x760	D1830NCB	D1830NP	D1830SCB	D1830SP
18x36 457x914	D1836NCB	D1836NP	D1836SCB	D1836SP
18x42 457x1066	D1842NCB	D1842NP	D1842SCB	D1842SP
18x48 457x1219	D1848NCB	D1848NP	D1848SCB	D1848SP
18x60 457x1524	D1860NCB	D1860NP	D1860SCB	D1860SP
18x72 457x1825	D1872NCB	D1872NP	D1872SCB	D1872SP
21x24 530x610	D2124NCB	D2124NP	D2124SCB	D2124SP
21x30 530x760	D2130NCB	D2130NP	D2130SCB	D2130SP
21x36 530x914	D2136NCB	D2136NP	D2136SCB	D2136SP
21x42 530x1066	D2142NCB	D2142NP	D2142SCB	D2142SP
21x48 530x1219	D2148NCB	D2148NP	D2148SCB	D2148SP
21x60 530x1524	D2160NCB	D2160NP	D2160SCB	D2160SP
21x72 530x1825	D2172NCB	D2172NP	D2172SCB	D2172SP
24x24 610x610	D2424NCB	D2424NP	D2424SCB	D2424SP
24x30 610x760	D2430NCB	D2430NP	D2430SCB	D2430SP
24x36 610x914	D2436NCB	D2436NP	D2436SCB	D2436SP
24x42 610x1066	D2442NCB	D2442NP	D2442SCB	D2442SP
24x48 610x1219	D2448NCB	D2448NP	D2448SCB	D2448SP
24x60 610x1524	D2460NCB	D2460NP	D2460SCB	D2460SP
24x72 610x1825	D2472NCB	D2472NP	D2472SCB	D2472SP

\*Note 1: "Made To Order Dollies" are non-returnable and orders are non-cancelable.

Note 2: Replacement wraparound bumper kits are available. See your Metro representative for details.

Note 3: Maximum load capacity for dollies is 1,000 lbs. (454kg), depending on caster selection.

## Stock Truck Dollies —{11.36}

These are aluminum dollies with a single catalog number for frame and casters with wraparound bumper. Use with Super Erecta Shelving and posts to create mobile carts for higher weight capacities. See specific plate caster load ratings (page 53) to determine appropriate stock truck dolly.



Stock Dolly

Shelf Width/Length (in.) (mm)	Castors	Cat. No.
24x36 610x914	Two B5DN/Two B5DNB	D53JN
24x48 610x1219	Two B5DN/Two B5DNB	D55JN
24x60 610x1524	Two B5DN/Two B5DNB	D56JN
24x36 610x914	Two 6P/Two BL6P	D53MN
24x48 610x1219	Two 6P/Two BL6P	D55MN
24x60 610x1524	Two 6P/Two BL6P	D56MN
24x48 610x1219	Two 8P/Two BL8P	D55PN
24x60 610x1524	Two 8P/Two BL8P	D56PN
24x48 610x1219	Two C8DA/Two C8DSL*	D55PSLN
24x60 610x1524	Two C8DA/Two C8DSL*	D56PSLN

\*Swivel Lock.

Note: Replacement wraparound bumper kits are available. See your Metro representative for details.

## Staked Posts — For use with Truck Dollies —{10.01}

Each post connects to a truck dolly through the stem receptacle. The stem receptacles are staked into the bottom of these posts to ensure a durable connection in abusive applications.



Staked Post

Height* (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Stainless
54 9/16 1385	3 1.4	54P-STKD	54PS-STKD
62 9/16 1590	3 1/2 1.6	63P-STKD	63PS-STKD
74 5/8 1895	4 1.8	74P-STKD	74PS-STKD

\*Height includes leveling bolt and cap.

## Pitched Aluminum Dust Cover —{11.37}

For "Made-To-Order" dollies, these covers act as a barrier between the floor and the bottom shelf of cart for cleanliness. These covers are factory-assembled and must be ordered with desired dolly frame.

Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
24x36 610x914	7 3.2	DCT2436N
24x42 610x1066	7 3.2	DCT2442N
24x48 610x1219	8 3.6	DCT2448N
24x60 610x1524	8 3.6	DCT2460N
24x72 610x1825	8 3.6	DCT2472N




Pitched Aluminum Dust Cover




## Plate Casters — {11.37}

Use in conjunction with Metro "Made-to-Order" truck dollies to assemble heavy-duty mobile base for your needs. Important: The caster plate style must be specified at the time of order — "B" or "C" plate. The dollies are modified at the factory prior to shipment.

Top view of casterplates



B-plate casters offer good impact resistance for common thresholds.

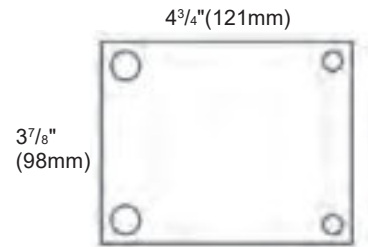

C-plate casters offer the thickest metal chassis and largest wheels for the most abusive conditions and heaviest storage loads.

Diameter (in.)	Diameter (mm)	Wheel Face (in.) (mm)		Load Rating (lbs.) (kg)		Weight Each (lbs.) (kg)		Type	Wheel Tread	Cat. No.
5	125	1 <sup>3</sup> / <sub>8</sub>	35	225	101	2 <sup>1</sup> / <sub>8</sub>	.99	Swivel	Donut Neoprene	<b>B5DN</b>
5	125	1 <sup>3</sup> / <sub>8</sub>	35	225	101	2 <sup>1</sup> / <sub>4</sub>	1	Brake	Donut Neoprene	<b>B5DNB</b>
5	125	1 <sup>3</sup> / <sub>8</sub>	35	225	101	2	.9	Rigid	Donut Neoprene	<b>B5DNR</b>
5	125	1 <sup>1</sup> / <sub>4</sub>	31	300	135	2 <sup>1</sup> / <sub>8</sub>	.99	Swivel	Polyurethane	<b>B5P</b>
5	125	1 <sup>1</sup> / <sub>4</sub>	31	300	135	2 <sup>1</sup> / <sub>4</sub>	1	Brake	Polyurethane	<b>B5PB</b>
5	125	1 <sup>1</sup> / <sub>4</sub>	31	300	135	2	.9	Rigid	Polyurethane	<b>B5PR</b>
6	152	2	51	400	181	8	3.63	Swivel	Hi-Modulus Donut	<b>C6DA</b>
6	152	2	51	400	181	8	3.63	Swivel/Brake	Hi-Modulus Donut	<b>C6DBA</b>
6	152	2	51	400	181	8	3.63	Rigid	Hi-Modulus Donut	<b>C6DRA</b>
6	152	2	51	400	181	8	3.63	Swivel/Lock	Hi-Modulus Donut	<b>C6DSLA</b>
8	203	2	51	450	204	9	4.08	Swivel	Hi-Modulus Donut	<b>C8DA</b>
8	203	2	51	450	204	9	4.08	Swivel/Brake	Hi-Modulus Donut	<b>C8DBA</b>
8	203	2	51	450	204	9	4.08	Rigid	Hi-Modulus Donut	<b>C8DRA</b>
8	203	2	51	450	204	9	4.08	Swivel/Lock	Hi-Modulus Donut	<b>C8DSLA</b>
6	150	2	51	500	225	4 <sup>3</sup> / <sub>4</sub>	2.1	Swivel	Polyurethane	<b>C6P</b>
6	150	2	51	500	225	4 <sup>7</sup> / <sub>8</sub>	2.2	Brake	Polyurethane	<b>C6PB</b>
6	150	2	51	500	225	3 <sup>1</sup> / <sub>2</sub>	1.6	Rigid	Polyurethane	<b>C6PR</b>
6	150	2	51	500	225	5	2.3	Swivel/Lock	Polyurethane	<b>C6PS/L-LH</b>
8	200	2	51	700	315	5 <sup>3</sup> / <sub>4</sub>	2.6	Swivel	Polyurethane	<b>C8P</b>
8	200	2	51	700	315	5 <sup>7</sup> / <sub>8</sub>	2.65	Brake	Polyurethane	<b>C8PB</b>
8	200	2	51	700	315	4 <sup>1</sup> / <sub>2</sub>	2	Rigid	Polyurethane	<b>C8PR</b>
8	200	2	51	700	315	6	2.7	Swivel/Lock	Polyurethane	<b>C8PS/L-LH</b>
8	200	2	51	280	127	8	3.6	Swivel	Semi-Pneumatic Style	<b>C8SPN</b>
8	200	2	51	280	127	8 <sup>1</sup> / <sub>2</sub>	3.8	Swivel/Brake	Semi-Pneumatic Style	<b>C8SPNB</b>
8	200	2	51	280	128	8	3.6	Rigid	Semi-Pneumatic Style	<b>C8SPNR</b>

Note 1: Brakes are foot-operated.

Note 2: 8" (200mm) casters should not be used on units less than 21" (530mm) wide.

Note 3: Swivel lock casters are set diagonally on the left-hand sides when dolly mounted.

Load Heights: (±1/16") (±1.6mm) B5 Series — 6 1/4" (159mm), C6 Series — 7 1/2" (190mm), C8 Series — 9 1/2" (241mm), 8S Series — 9 1/2" (241mm)



B5DNB with Wheel Brake



B5PPolyurethane



C8SPN Semi-Pneumatic Style "Flat-Free"



B5PGSA

## Stainless Steel Cart-Washable Plate Casters — {11.37}

Wheel Diameter (in.) (mm)		Face (in.) (mm)		Load Rating (lbs.) (kg)		Weight Each (lbs.) (kg)		Type	Wheel Tread	Cat. No.
5	125	1 1/4	31	300	135	2 1/8	.99	Swivel	Polyurethane	<b>B5PGSA</b>
5	125	1 1/4	31	300	135	2 1/4	1	Brake	Polyurethane	<b>B5PBGSA</b>
5	125	1 1/4	31	300	135	2	.9	Rigid	Polyurethane	<b>B5PRGSA</b>
6	150	1 1/2	38	600	270	4 3/4	2.1	Swivel	Polyurethane	<b>C6PGSA</b>
6	150	1 1/2	38	600	270	4 7/8	2.2	Brake	Polyurethane	<b>C6PBGSA</b>

See above notes for important specification information.

### General Guidelines for Metro Carts Used in Over-the-Road Applications

For applications where carts are loaded on to or off of trucks for transportation, and/or where thresholds exceeding 3/8" in height are repeatedly encountered:

- A dolly is recommended for maximum useful life.
- Casters of at least 6" diameter are recommended. Consideration should be given to the shock absorbing ability of the caster wheel, but selection will need to be based upon the specifics of the application.
- Aluminum split sleeves and staked posts should be used.
- Weight load should be limited to approximately 750 lbs. depending on the specifics of the application.

Consult your Metro representative with the details of the Over-the-Road application. Each application is unique, and the preceding points are intended only as general guidelines.

See page 51 for additional specifications and appropriate parameters for all types of Metro casters.

## Brake Lock/Swivel Lock Combination Casters —{11.70}

Patented, foot-operated design enables a single pair of casters to serve as swivel, rigid or brake casters. Conveniently positioned on the dolly, not on the wheels, the downward pressure pedals prevent scuffing of shoes.



Brake Lock/Swivel Lock combination casters

- **How It Works**  
Brake lock/swivel lock caster sets are operated by two separate foot pedals. One pedal locks the two wheels in a rigid position or releases them to swivel; the other pedal engages and releases brakes on the same two wheels.
- **Convenient**  
Pedals are on the dolly, not the wheels, making operation more convenient. Downward pressure on the pedals saves shoes from scuffing.
- **Casters**  
Long wearing polyurethane. Resists abrasion. Non-marking, shock absorbing. Wheels are available in 6" (152mm) and 8" (203mm) size.
- **Recommended Caster Selection**  
Two swivel casters at one end and brake/swivel lock set at the other end. Other caster combinations can be used, however, including brake/swivel lock sets at both ends. Wraparound bumper recommended.

Type	Wheel Diameter (in.) (mm)		Face (in.) (mm)		For Use With	Load Rating (lbs.) (kg)		Weight (lbs.) (kg)		Cat. No.
*Brake/Lock	6	152	2	51	24" (610mm) Deep Dolly and 6P Caster	600	272	7 1/4	3.3	BL6P24
*Brake/Lock	8	203	2	51	24" (610mm) Deep Dolly and 8P Caster	600	272	9	4.1	BL8P24
Swivel	6	152	2	51	BL6P24 Brake/Lock Set	600	272	5 1/4	2.3	6P
Rigid	6	152	2	51	6P Swivel Caster	600	272	5	2.26	6PR
Swivel	8	203	2	51	BL8P24 Brake/Lock Set	600	272	6 1/2	2.9	8P
Rigid	8	203	2	51	8P Swivel Caster	600	272	6	2.7	8PR

\*Above part numbers include the brake/lock mechanism with two casters. Order dolly separately (see page 28). In addition order either two 6P or two 8P casters.  
Example: (1) D2436NP and (1) BL6P24 or (1) BL8P24 and two 6P or two 8P.

Note: Not compatible on security units.

**Load Heights:** (±1/16") (±1.6mm) 6P Series — 7 7/8" (200mm), 8P Series — 9 13/16" (249mm).



Tow Bar Assembly

## Tow Bar Assembly —{11.70}

Attaches to underside of dolly to facilitate transport of dolly carts in tandem. Must be factory assembled and ordered with desired dolly frame (see page 52).

Length (in.) (mm)		Cat. No.
48	1219	TBA48

**Note:** "C" plate caster must be used with Tow Bar Assembly. Tow Bar Assembly for use with 24" (610mm) units only.

**Note:** Number of carts to be towed, weight on carts, and towing route affect operation of tow bar assembly. **Before ordering, contact your Metro representative.**

Tow Bar Assembly not appropriate for use with Brake Lock/Swivel Lock system.



Push Handle

## Handles —{11.40}

Use on corresponding width Super Erecta units to provide additional maneuverability to dolly carts or stem caster carts. Aluminum split sleeves included for attaching to cart.

		Push Handles		Extended Handles	
Length (in.)	(mm)	Cat. No. Chrome	Cat. No. Stainless	Cat. No. Chrome	Cat. No. Stainless
14	355	PH14NC	PH14NS	EH14NC	EH14NS
18	457	PH18NC	PH18NS	EH18NC	EH18NS
21	530	PH21NC	PH21NS	EH21NC	EH21NS
24	610	PH24NC	PH24NS	EH24NC	EH24NS
30	760	PH30NC		EH30NC	
36	914	PH36NC		EH36NC	

**Note:** Handles fit unit widths only. Extended handles add 6" (152.4mm) to length of unit.



Extended Handle

## Shelf Dividers for Super Erecta Shelves — {10.04}

Keeps shelf contents orderly with these 8" (203mm) high, pressure-fit dividers.

Shelf Width (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Plated	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
14	355	1.8	0.8	DD14C	DD14BL	DD14W	DD14-DSG
18	457	2.25	1.0	DD18C	DD18BL	DD18W	DD18-DSG
21	530	2.5	1.1	DD21C	DD21BL	DD21W	DD21-DSG
24	610	2.75	1.3	DD24C	DD24BL	DD24W	DD24-DSG
30	760	3.25	1.5	DD30C	DD30BL	DD30W	DD30-DSG
36	914	3.75	1.7	DD36C	DD36BL	DD36W	DD36-DSG




Shelf Divider for Super Erecta Shelves

Shelf Width (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless	Cat. No. Designer Colors
14	355	1.8	0.8	DD14K3	DD14S	DD14-D
18	457	2.25	1.0	DD18K3	DD18S	DD18-D
21	530	2.5	1.1	DD21K3	DD21S	DD21-D
24	610	2.75	1.3	DD24K3	DD24S	DD24-D
30	760	3.25	1.5		DD30S	
36	914	3.75	1.7		DD36S	

## Universal 8" (203mm) Shelf Dividers — Light Duty — {9.25}

Each divider includes a panel and two clips to connect to any Super Erecta or Super Adjustable wire self. Corrosion proof.

Nominal Length (in.)	(mm)	Fits Shelf Depth	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
18	457	18", 21" (457, 530mm)	1.3	0.6	MUD18-8
24	610	24" (610mm)	1.6	0.7	MUD24-8

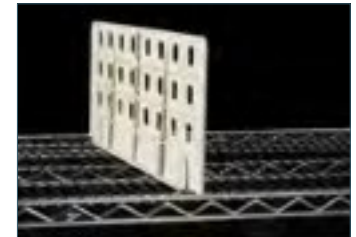

Universal Shelf Divider

## Shelf Ledges — Side and Back — {10.04}

For stationary or mobile installations, ledges prevent items from protruding or falling from shelves.

1" (25mm) High Ledges

Length (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Plated	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Stainless	Cat. No. Designer Colors†
14	355	0.58	0.25	L14N-1C	L14N-1BL	L14N-1W	L14N-1-DSG	L14N-1S	L14N-1-D
18	457	0.75	0.33	L18N-1C	L18N-1BL	L18N-1W	L18N-1-DSG	L18N-1S	L18N-1-D
21	530	0.75	0.33	L21N-1C	L21N-1BL	L21N-1W	L21N-1-DSG	L21N-1S	L21N-1-D
24	610	1.0	0.45	L24N-1C	L24N-1BL	L24N-1W	L24N-1-DSG	L24N-1S	L24N-1-D
30	760	2.0	0.9	L30N-1C	L30N-1BL	L30N-1W	L30N-1-DSG	L30N-1S	L30N-1-D
36	914	2.5	1.13	L36N-1C	L36N-1BL	L36N-1W	L36N-1-DSG	L36N-1S	L36N-1-D
42	1066	2.75	1.25	L42N-1C	L42N-1BL	L42N-1W	L42N-1-DSG	L42N-1S	L42N-1-D
48	1219	3.5	1.58	L48N-1C	L48N-1BL	L48N-1W	L48N-1-DSG	L48N-1S	L48N-1-D
54	1370	4.4	1.65	L54N-1C	L54N-1BL	L54N-1W	L54N-1-DSG	L54N-1S	L54N-1-D
60	1524	3.75	1.68	L60N-1C	L60N-1BL	L60N-1W	L60N-1-DSG	L60N-1S	L60N-1-D
72	1828	4.0	1.81	L72N-1C	L72N-1BL	L72N-1W	L72N-1-DSG	L72N-1S	L72N-1-D



1" (25mm) Ledge



4" (102mm) Ledge

4" (100mm) High Stackable Ledges

Shelf Width (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Plated	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless	Cat. No. Designer Colors†
14	355	0.83	0.36	L14N-4C	L14N-4BL	L14N-4W	L14N-4-DSG	L14N-4K3	L14N-4S	L14N-4-D
18	457	1.5	0.68	L18N-4C	L18N-4BL	L18N-4W	L18N-4-DSG	L18N-4K3	L18N-4S	L18N-4-D
21	530	1.75	0.71	L21N-4C	L21N-4BL	L21N-4W	L21N-4-DSG	L21N-4K3	L21N-4S	L21N-4-D
24	610	2.0	0.9	L24N-4C	L24N-4BL	L24N-4W	L24N-4-DSG	L24N-4K3	L24N-4S	L24N-4-D
30	760	2.25	1.03	L30N-4C	L30N-4BL	L30N-4W	L30N-4-DSG	L30N-4K3	L30N-4S	L30N-4-D
36	914	2.75	1.25	L36N-4C	L36N-4BL	L36N-4W	L36N-4-DSG	L36N-4K3	L36N-4S	L36N-4-D
42	1066	3.25	1.48	L42N-4C	L42N-4BL	L42N-4W	L42N-4-DSG	L42N-4K3	L42N-4S	L42N-4-D
48	1219	3.75	1.68	L48N-4C	L48N-4BL	L48N-4W	L48N-4-DSG	L48N-4K3	L48N-4S	L48N-4-D
54	1370	3.8	1.73	L54N-4C	L54N-4BL	L54N-4W	L54N-4-DSG	L54N-4K3	L54N-4S	L54N-4-D
60	1524	4.0	1.81	L60N-4C	L60N-4BL	L60N-4W	L60N-4-DSG	L60N-4K3	L60N-4S	L60N-4-D
72	1828	5.0	2.25	L72N-4C	L72N-4BL	L72N-4W	L72N-4-DSG	L72N-4K3	L72N-4S	L72N-4-D

Note: Actual ledge length is approximately 1" (25mm) shorter than nominal shelf length/width.

†Contact your Metro representative for pricing on DesignerColor Ledges.

Indicates antimicrobial product.



Enclosure Panel

## Enclosure Panels — {10.04} {10.30}

An efficient way to enclose space for stationary or mobile applications.

- Can be used with Super Erecta® and Super Adjustable wire shelving, and Super Erecta solid shelving.
- Appropriate mounting hardware supplied with each panel for stationary applications.

Width/Height (in.)	(mm)	For Nominal Post Height (in.)	(mm)	Grid Opening (in.)	(mm)	Weight (lbs.)	(kg)	Cat. No. Chrome	Cat. No. Stainless
12 <sup>3</sup> / <sub>8</sub> x50 <sup>3</sup> / <sub>4</sub>	313x1289	54	1370	2 <sup>7</sup> / <sub>8</sub> x3 <sup>5</sup> / <sub>8</sub>	73x92	3	1.4	EP35C	EP35S
12 <sup>3</sup> / <sub>8</sub> x59 <sup>3</sup> / <sub>4</sub>	313x1518	63	1600	2 <sup>7</sup> / <sub>8</sub> x3 <sup>5</sup> / <sub>8</sub>	73x92	4	1.8	EP36C	EP36S
12 <sup>3</sup> / <sub>8</sub> x70 <sup>1</sup> / <sub>2</sub>	313x1791	74	1880	2 <sup>7</sup> / <sub>8</sub> x3 <sup>5</sup> / <sub>8</sub>	73x92	6	2.7	EP37C	EP37S
18 <sup>3</sup> / <sub>8</sub> x50 <sup>3</sup> / <sub>4</sub>	464x1289	54	1370	3 <sup>3</sup> / <sub>8</sub> x3 <sup>5</sup> / <sub>8</sub>	86x92	5	2.3	EP55C	EP55S
18 <sup>3</sup> / <sub>8</sub> x59 <sup>3</sup> / <sub>4</sub>	464x1518	63	1600	3 <sup>3</sup> / <sub>8</sub> x3 <sup>5</sup> / <sub>8</sub>	86x92	6	2.7	EP56C	EP56S
18 <sup>3</sup> / <sub>8</sub> x70 <sup>1</sup> / <sub>2</sub>	464x1791	74	1800	3 <sup>3</sup> / <sub>8</sub> x3 <sup>5</sup> / <sub>8</sub>	86x92	7	3.2	EP57C	EP57S

All panels are 7/8" (22mm) deep.

Note: Units with a solid shelf in the top position require the use of a three-sided double snake frame directly below it (see page 57).

## Ordering Guide for Enclosure Panels

Super Erecta and Super Adjustable Wire Shelving Units Super Erecta Solid Shelving Units

Ends—Panels required for each end according to shelf width, as follows:

Nominal Post Height (in.)	(mm)	18" (457mm) Nominal Shelf Width	21" (530mm) Nominal Shelf Width	24" (610mm) Nominal Shelf Width	30" (760mm) Nominal Shelf Width	36" (914mm) Nominal Shelf Width
54	1370	(1) EP35	(1) EP35	(1) EP55	(2) EP35	(1) EP35
						(1) EP55
63	1600	(1) EP36	(1) EP36	(1) EP56	(2) EP36	(1) EP36
						(1) EP56
74	1880	(1) EP37	(1) EP37	(1) EP57	(2) EP37	(1) EP37
						(1) EP57

Backs—Requires multiple panels in quantities shown for specific length shelf:

For Wire Shelves:

Nominal Post Height (in.)	(mm)	30" (760mm) Nominal Shelf Length	36" (914mm) Nominal Shelf Length	42" (1066mm) Nominal Shelf Length	48" (1219mm) Nominal Shelf Length	54" (1370mm) Nominal Shelf Length	60" (1524mm) Nominal Shelf Length	72" (1825mm) Nominal Shelf Length
54	1370	(2) EP35	(1) EP35	(2) EP55	(2) EP35	(1) EP35	(3) EP55	(1) EP35
			(1) EP55		(1) EP55	(2) EP55		(3) EP55
63	1600	(2) EP36	(1) EP36	(2) EP56	(2) EP36	(1) EP36	(3) EP56	(1) EP36
			(1) EP56		(1) EP56	(2) EP56		(3) EP56
74	1880	(2) EP37	(1) EP37	(2) EP57	(2) EP37	(1) EP37	(3) EP57	(1) EP37
			(1) EP57		(1) EP57	(2) EP57		(3) EP57

For Solid Shelves\*:

Nominal Post Height (in.)	(mm)	30" (760mm) Nominal Shelf Length	36" (914mm) Nominal Shelf Length	42" (1066mm) Nominal Shelf Length	48" (1219mm) Nominal Shelf Length	54" (1370mm) Nominal Shelf Length	60" (1524mm) Nominal Shelf Length	72" (1825mm) Nominal Shelf Length
54	1370	(1) EP55	(2) EP35	(1) EP35	(2) EP55	N/A	(1) EP35	N/A
				(1) EP55		N/A	(2) EP55	N/A
63	1600	(1) EP56	(2) EP36	(1) EP36	(2) EP56	N/A	(1) EP36	N/A
				(1) EP56		N/A	(2) EP56	N/A
74	1880	(1) EP57	(2) EP37	(2) EP37	(2) EP57	N/A	(1) EP37	N/A
				(1) EP57		N/A	(2) EP57	N/A

\*Note: Units with a solid shelf in the top position require the use of a three-sided double snake frame directly below it (see page 57).

## Hardware Kit for Mobile Applications

It is recommended that additional clamp assemblies are used to secure the enclosure panels to the intermediate shelves on a mobile unit or transport cart. For the most abusive mobile applications, use two clamp assemblies at each intermediate shelf level for each enclosure panel.

Plated steel. Cat. No. 9970Z Kit of 8 clamp assemblies

Stainless steel. Cat. No. 9970S Kit of 8 clamp assemblies

## Replacement Mounting Kit for Enclosure Panel

Kit includes two security S-hooks and two clamp assemblies.

Plated steel. Cat. No. 9970EPZ


Stainless steel. Cat. No. 9970EPS



Super Adjustable  
Super Erecta Cart with  
Enclosure Panels



8 included  
per kit



Mounting Kit for Enclosure Panel



## Shelf-to-Shelf Dividers — {9.25}

Full height dividers efficiently compartmentalize the space between two shelves. Corrosion proof. Compatible with Super Erecta and Super Adjustable wire shelves.

Fits Shelf Depth (in.)	(mm)	Nominal Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
18, 21	457, 530	16	406	2.3	1.0	MD18-16
18, 21	457, 530	20	508	2.5	1.1	MD18-20
18, 21	457, 530	24	610	3.8	1.7	MD18-24
24	610	16	406	2.8	1.2	MD24-16
24	610	20	508	3.0	1.3	MD24-20
24	610	24	610	4.4	2.0	MD24-24

\*Note: -16 parts have three panels, -20 parts have four panels, -24 parts have five panels.



Shelf-to-Shelf Dividers

## Three-Sided Double Snake Frames — {10.04}

Provide additional support or access to floor with these sturdy square snake frames. Plated finish.

Width/Length (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Plated
18x24	457x610	5	2.3	SF31N3C
18x30	457x760	6	2.7	SF32N3C
18x36	457x914	6 1/2	2.7	SF33N3C
18x42	457x1066	7	3.2	SF34N3C
18x48	457x1219	7 3/4	3.5	SF35N3C
18x60	457x1524	8	3.6	SF36N3C
18x72	457x1829	9	4.1	SF37N3C
21x24	530x610	5	2.3	SF41N3C
21x30	530x760	6	2.7	SF42N3C
21x36	530x914	6 1/2	2.7	SF43N3C
21x42	530x1066	7	3.2	SF44N3C
21x48	530x1219	8	3.6	SF45N3C
21x60	530x1524	8 1/2	3.8	SF46N3C
21x72	530x1829	10	4.5	SF47N3C
24x24	610x610	6	2.7	SF51N3C
24x30	610x760	7	3.2	SF52N3C
24x36	610x914	7 1/2	3.4	SF53N3C
24x42	610x1066	8	3.6	SF54N3C
24x48	610x1219	9	4.1	SF55N3C
24x60	610x1524	10	4.5	SF56N3C
24x72	610x1829	11	5.0	SF57N3C



Three-sided Double Snake Frame

## 21" Tall Divider

Chrome finish.  
Fits 24" Deep Shelf  
Cat. No. DD24C-21

## Horizontal Divider

Chrome finish.  
Fits 21" Tall Divider  
Available in 12" or 18" lengths  
Cat. No. DDH24C-12  
Cat. No. DDH24C-18



## Rods and Tabs — {10.04}

Form side and back enclosures for a shelving unit. Can also serve as uniform dividers within unit by passing through shelves from top to bottom. Recommended spacing: every 6" (150mm) to 12" (305mm), depending upon shelf contents. Plated rods are shipped with 4 plated tabs per rod. Stainless steel rods come with 4 rust-proof tabs.

Min. Post Height (in.)	Rod Length (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Plated	Cat. No. Stainless
54	52	1320	1	0.5	R52C	R52S
63	61	1549	1	0.5	R61C	R61S
74	72	1830	1 1/4	0.6	R72C	R72S
86	84	2135	1 1/2	0.7	R84C	R84S



Plated rod with plated tab.

## Additional Plated Tabs —

Bag of 12  
Cat. No. 9084Z



Stainless Steel rod with rust-proof tab.

## Additional Rust-Proof Tabs —

Bag of 4  
Cat. No. 9084P

Divide shelf space with rods to sort hard to manage items.





Decorator Shelf Inlays

### Decorator Shelf Inlays — {10.06}

Hardboard mats prevent small items from falling through wire shelves. Fit between posts and level with top of shelf edge. Reversible, black and white. Packed individually.

Width/Length (in.) (mm)		Cat. No.
14x36	355x914	1436BWI
14x48	355x1219	1448BWI
18x24	457x610	1824BWI
18x36	457x914	1836BWI
18x48	457x1219	1848BWI
24x24	610x610	2424BWI
24x36	610x914	2436BWI
24x48	610x1219	2448BWI




Clear Shelf Inlays

### Clear Shelf Inlays — {10.06}

Nearly invisible plastic mat retains open-wire look of shelves and allows light penetration. Sold in packages of 4.

Width/Length (in.) (mm)		Cat. No.	Width/Length (in.) (mm)		Cat. No.
14x36	355x914	1436CI-4	21x36	530x914	2136CI-4
14x48	355x1219	1448CI-4	21x48	530x1219	2148CI-4
14x60	355x1524	1460CI-4	21x60	530x1524	2160CI-4
18x36	457x914	1836CI-4	24x36	610x914	2436CI-4
18x48	457x1219	1848CI-4	24x48	610x1219	2448CI-4
18x60	457x1524	1860CI-4	24x60	610x1524	2460CI-4



Snap-on Hooks

### Snap-On Hooks — {10.05}

Multi-purpose hooks in three styles attach to hanger rails, mounting rails or shelves for instant access.

Description	Height (in.) (mm)	Cat. No. Chrome	Cat. No. Black
Style A — Small	3 <sup>7</sup> / <sub>16</sub> 90	HK23C	HK23B
Style B — Large	3 <sup>7</sup> / <sub>16</sub> 90	HK25C	HK25B
Style C — Double	3 <sup>7</sup> / <sub>16</sub> 90	HK26C	



Hanger Rail

### Hanger Rails — {10.05}

Convenient rail fits on posts along the width or length of the unit. Optional hooks can hang from rail at any point.

Length† (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Designer Colors
14 355	1 .45	H114C	H114B	H114W	H114-DSG	H114-D
18 457	1 <sup>1</sup> / <sub>4</sub> .57	H118C	H118B	H118W	H118-DSG	H118-D
24 610	1 <sup>1</sup> / <sub>2</sub> .68	H124C	H124B	H124W	H124-DSG	H124-D
30 760	1 <sup>1</sup> / <sub>2</sub> .68	H130C	H130B	H130W	H130-DSG	H130-D
36 914	2 .90	H136C	H136B	H136W	H136-DSG	H136-D
48 1219	2 <sup>1</sup> / <sub>2</sub> 1.13	H148C	H148B	H148W	H148-DSG	H148-D

†14", 18" and 24" (355, 457 and 610mm) sizes fit shelf width (depth). 30", 36" and 48" (760, 914 and 1219mm) sizes fit shelf length.

## Tray Slides —{10.04}

Freeup shelvesfor more efficient use of space.Available in chrome and Metroseal 3 finish.  
22<sup>3</sup>/<sub>4</sub>" H. (578mm).

	Width (in.)	Overall Depth (mm)	Slide Profile (mm)	On Center Slide Spacing (mm)	Fits Shelf Width (in.)	Approx. Weight/Pair (lbs.)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®
14 <sup>5</sup> / <sub>8</sub>	371	2 <sup>1</sup> / <sub>4</sub>	56	1 <sup>1</sup> / <sub>2</sub>	37	9 <sup>1</sup> / <sub>2</sub>	15SNC	15SNK3
20	508	2 <sup>1</sup> / <sub>4</sub>	56	1 <sup>1</sup> / <sub>2</sub>	37	11	20SNC	20SNK3



Tray Slides

## Super Erecta® Slide System —{10.04}

A superspace-savingsolution. Using SuperErecta® wire units 21"or 24" (530 and 610mm) wide, tote boxes and this innovative slide system, you have the flexibility to create a custom configuration that can be positioned quickly on new or existing units without the use of tools. Finishis nickel-chrome wire with clearprotective coating.

Outside Slide Dimensions Height/Width/Length (in.) (mm)		Fits Shelf Width (in.) (mm)		Adaptable Boxes	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
10 <sup>1</sup> / <sub>4</sub> x20 <sup>3</sup> / <sub>8</sub> x21 <sup>5</sup> / <sub>8</sub>	256x510x537	24	610	TB/MTB93030 TB/MTB93060 TB/MTB93080	4 <sup>3</sup> / <sub>4</sub>	2.1	SS2NC
10 <sup>1</sup> / <sub>4</sub> x14x17 <sup>1</sup> / <sub>8</sub>	256x355x430	21	530	TB/MTB92035 TB/MTB92060 TB/MTB92080	3 <sup>1</sup> / <sub>2</sub>	1.5	SS3NC
10 <sup>1</sup> / <sub>4</sub> x25 <sup>1</sup> / <sub>8</sub> x17 <sup>1</sup> / <sub>8</sub>	256x630x430	21	530	TB/MTB93030* TB/MTB93060* TB/MTB93080*	4	1.8	SS4NC

\*Fits SS4NC with box turned sideways.



Super Erecta Slide System in place on shelf (Tote box sold separately)

## Adjustable Undershelf Slides —{10.04}

Theseslides can be spacedto fit anywidth container or tote box.

Item	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. (pair)
For 18" (457mm) wide shelf	1	0.4	US18NA
*For 21" (530mm) wide shelf	1	0.4	US21NA
For 24" (610mm) wide shelf	1	0.4	US24NA

\*Not adaptable to 24" (610mm) long shelf.



Adjustable Undershelf Slide

## File Basket —{10.05}

The convenient place to keep files and papers.

- Measures2<sup>5</sup>/<sub>8</sub>"W. x 12<sup>3</sup>/<sub>4</sub>" L. x 8<sup>3</sup>/<sub>4</sub>" H. (67mm W. x 324mm L. x 222mm H.).
- Largeenough to hold standard-sizefile folders.
- Attacheseasily.

Width/Length (in.)	(mm)	Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
2 <sup>5</sup> / <sub>8</sub> x12 <sup>3</sup> / <sub>4</sub>	63x330	8 <sup>3</sup> / <sub>4</sub>	228	2.1	1.0	PH1239C



File Basket

## Garment Hanger Tube with Brackets —{10.05}

Hanger tubes attach easily under SuperErecta shelvesfor hanging garments. Available in 18,"21" and 24" (457, 530 and 610mm) widths and in same length asselves.

Tube Length (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Shelf Width 18" (457mm)	Shelf Width 21" (530mm)	Shelf Width 24" (610mm)
24	610	2 <sup>1</sup> / <sub>2</sub>	1.1	AT2418NC	AT2421NC	AT2424NC
30	760	2 <sup>1</sup> / <sub>2</sub>	1.1	AT3018NC	AT3021NC	AT3024NC
36	914	3	1.4	AT3618NC	AT3621NC	AT3624NC
42	1066	3 <sup>1</sup> / <sub>2</sub>	1.6	AT4218NC	AT4221NC	AT4224NC
48	1219	3 <sup>1</sup> / <sub>2</sub>	1.6	AT4818NC	AT4821NC	AT4824NC
60	1524	4	1.8	AT6018NC	AT6021NC	AT6024NC
72	1828	4 <sup>1</sup> / <sub>2</sub>	2.0	AT7218NC	AT7221NC	AT7224NC



Garment Hanger Tube with Brackets

Indicatesantimicrobial product.



Large Display/Storage Basket

### Storage Baskets — {10.05}

Generous-sized baskets attach in seconds to hanger rail or shelves.

Width/Length/Depth (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Plated	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
13 <sup>3</sup> / <sub>8</sub> x5x7	345x127x180	8 <sup>1</sup> / <sub>2</sub>	4	H209C	H209B	H209W	H209-DSG
17 <sup>3</sup> / <sub>8</sub> x7 <sup>1</sup> / <sub>2</sub> x5	440x190x127	7	3	H210C	H210B	H210W	H210-DSG
17 <sup>3</sup> / <sub>8</sub> x7 <sup>1</sup> / <sub>2</sub> x10	440x190x255	11	5	H212C	H212B	H212W	H212-DSG



Swing Hanger

### Swing Hanger — {10.05}

Attaches to post to provide convenient storage for hanging items. Redepoxy finish.

Arm Length (in.) (mm)	Weight Capacity (lbs.) (kg)	Cat. No.
6 <sup>1</sup> / <sub>4</sub> 160	20 9	H110R



Extension Display Hanger

### Extension Display Hanger — {10.06}

Snapson Super Erecta Shelf hanger rails and shelf frames. Accepts standard carded merchandise.

Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Finish/Color*	Cat. No.
6	152	.25	.1	Chrome	HHK6C
6	152	.25	.1	Black	HHK6B
8	203	.25	.1	Chrome	HHK8C
8	203	.25	.1	Black	HHK8B

\*White, smoked glass and designer colors also available. Allow 4-6 week lead time.



## Color Shelf Marker —{10.05}

Color code for effective organization. Snapsecurely to the front edge of SuperErecta and SuperAdjustable Super Erecta Wire Shelving.

Shelf Marker Size		Color	Cat. No.	Shelf Marker Size		Color	Cat. No.
(in.)	(mm)			(in.)	(mm)		
6x1 <sup>1</sup> / <sub>4</sub>	152x32	Blue	<b>CSM6-B</b>	6x1 <sup>1</sup> / <sub>4</sub>	152x32	White	<b>CSM6-W</b>
6x1 <sup>1</sup> / <sub>4</sub>	152x32	Green	<b>CSM6-G</b>	6x1 <sup>1</sup> / <sub>4</sub>	152x32	Yellow	<b>CSM6-Y</b>
6x1 <sup>1</sup> / <sub>4</sub>	152x32	Red	<b>CSM6-R</b>	6x1 <sup>1</sup> / <sub>4</sub>	152x32	Gray	<b>CSM6-GR</b>
6x1 <sup>1</sup> / <sub>4</sub>	152x32	Tan	<b>CSM6-T</b>				



Color Shelf Markers



CSM6-B



CSM6-G



CSM6-R



CSM6-T



CSM6-W



CSM6-Y



CSM6-GR

## Label Holders

It's easy to identify shelf contents with these snap-on plastic holders, available in four styles and a variety of sizes. Labels not included.

### 1<sup>1</sup>/<sub>4</sub>" (32mm) Label Holders —{10.05}

Gray. Holds most commercial labels. Available in a variety of lengths.

Label Size		Fits Shelf Length		Cat. No.
(in.)	(mm)	(in.)	(mm)	
3x1 <sup>1</sup> / <sub>4</sub>	75x32	All		<b>9990P</b>
13x1 <sup>1</sup> / <sub>4</sub>	330x32	18	457	<b>9990P1</b>
19x1 <sup>1</sup> / <sub>4</sub>	480x32	24	610	<b>9990P2</b>
25x1 <sup>1</sup> / <sub>4</sub>	635x32	30	760	<b>9990P30</b>
31x1 <sup>1</sup> / <sub>4</sub>	725x32	36	914	<b>9990P3</b>
43x1 <sup>1</sup> / <sub>4</sub>	1090x32	48	1219	<b>9990P4</b>
55x1 <sup>1</sup> / <sub>4</sub>	1395x32	60	1520	<b>9990P5</b>

For Cantilever Shelves, use 3" (75mm) label holder only.



1<sup>1</sup>/<sub>4</sub>" (32mm) Label Holder

### Clear Label Holders —{10.05}

Clear plastic allows decorator colors to show through. Holds most commercial 1<sup>1</sup>/<sub>4</sub>" (32mm) labels.

Label Size		Fits Shelf Length		Cat. No.
(in.)	(mm)	(in.)	(mm)	
3x1 <sup>1</sup> / <sub>4</sub>	75x32	All		<b>9990CL</b>
13x1 <sup>1</sup> / <sub>4</sub>	330x32	18	457	<b>9990CL1</b>
19x1 <sup>1</sup> / <sub>4</sub>	480x32	24	610	<b>9990CL2</b>
25x1 <sup>1</sup> / <sub>4</sub>	635x32	30	760	<b>9990CL30</b>
31x1 <sup>1</sup> / <sub>4</sub>	725x32	36	914	<b>9990CL3</b>
43x1 <sup>1</sup> / <sub>4</sub>	1090x32	48	1219	<b>9990CL4</b>
55x1 <sup>1</sup> / <sub>4</sub>	1395x32	60	1520	<b>9990CL5</b>

For Cantilever Shelves, use 3" (75mm) label holder only.



Clear Label Holder

### Slanted Label Holders —{10.05}

Gray solid plastic holder puts 1<sup>1</sup>/<sub>4</sub>" (32mm) labels on slant for easy viewing.

Label Size		Fits Shelf Length		Cat. No.
(in.)	(mm)	(in.)	(mm)	
3x1 <sup>1</sup> / <sub>4</sub>	75x32	All		<b>9990SL</b>
13x1 <sup>1</sup> / <sub>4</sub>	330x32	18	457	<b>9990SL1</b>
19x1 <sup>1</sup> / <sub>4</sub>	480x32	24	610	<b>9990SL2</b>
25x1 <sup>1</sup> / <sub>4</sub>	635x32	30	760	<b>9990SL30</b>
31x1 <sup>1</sup> / <sub>4</sub>	725x32	36	914	<b>9990SL3</b>
43x1 <sup>1</sup> / <sub>4</sub>	1090x32	48	1219	<b>9990SL4</b>
55x1 <sup>1</sup> / <sub>4</sub>	1395x32	60	1520	<b>9990SL5</b>

For Cantilever Shelves, use 3" (75mm) label holder only.



Slanted Label Holder



21X48X54UCMB  
(shown in Mariner Blue)

### Shelving and Cart Covers —{11.80}

- Help protect contents from dust and other air-borne contaminants.
- This allows units to be loaded and stored for longer periods of time before being transported. Covers also deter pilferage.
- Reinforced Corners: Help prevent tears and add greatly to durability of covers.
- Closure: Available in hook/loop or heavy-duty nylon zipper

#### Uncoated — machine washable:

- White: Knitted polyester, 4 oz. per square yard
- Mariner Blue: Woven polyester, 3.2 oz. per square yard.

#### Coated — waterproof, perfect for indoor/outdoor use:

- White or Mariner Blue—vinyl-coated nylon, 10 oz. per square yard
- Specially treated to resist bacteria, odor, mildew and flames

Catalog Numbers shown are for white cover. Add "MB" suffix to order Mariner Blue (i.e. 21X48X54UCMB)

Length/Height (in.)	Length/Height (mm)	White Nylon Uncoated		White Vinyl Coated	
		Zippered Closure Cat. No.	Velcro Closure Cat. No.	Zippered Closure Cat. No.	Velcro Closure Cat. No.
FOR SHELF TRUCKS & CARTS 18" (457mm) DEEP					
36x54	914x1370	18X36X54UC	18X36X54VUC	18X36X54C	18X36X54VC
36x62	914x1550	18X36X62UC	18X36X62VUC	18X36X62C	18X36X62VC
48x54	1219x1370	18X48X54UC	18X48X54VUC	18X48X54C	18X48X54VC
48x62	1219x1550	18X48X62UC	18X48X62VUC	18X48X62C	18X48X62VC
60x54	1524x1370	18X60X54UC	18X60X54VUC	18X60X54C	18X60X54VC
60x62	1524x1550	18X60X62UC	18X60X62VUC	18X60X62C	18X60X62VC
FOR SHELF TRUCKS & CARTS 21" (530mm) DEEP					
48x54	1219x1370	21X48X54UC	21X48X54VUC	21X48X54C	21X48X54VC
48x62	1219x1550	21X48X62UC	21X48X62VUC	21X48X62C	21X48X62VC
48x74	1219x1850	21X48X74UC	21X48X74VUC	21X48X74C	21X48X74VC
60x54	1524x1370	21X60X54UC	21X60X54VUC	21X60X54C	21X60X54VC
60x62	1524x1550	21X60X62UC	21X60X62VUC	21X60X62C	21X60X62VC
60x74	1524x1850	21X60X74UC	21X60X74VUC	21X60X74C	21X60X74VC
FOR SHELF TRUCKS & CARTS 24" (610mm) DEEP					
36x54	914x1370	24X36X54UC	24X36X54VUC	24X36X54C	24X36X54VC
36x62	914x1550	24X36X62UC	24X36X62VUC	24X36X62C	24X36X62VC
36x74	914x1850	24X36X74UC	24X36X74VUC	24X36X74C	24X36X74VC
48x54	1219x1370	24X48X54UC	24X48X54VUC	24X48X54C	24X48X54VC
48x62	1219x1550	24X48X62UC	24X48X62VUC	24X48X62C	24X48X62VC
48x74	1219x1850	24X48X74UC	24X48X74VUC	24X48X74C	24X48X74VC
60x54	1524x1370	24X60X54UC	24X60X54VUC	24X60X54C	24X60X54VC
60x62	1524x1550	24X60X62UC	24X60X62VUC	24X60X62C	24X60X62VC
60x74	1524x1850	24X60X74UC	24X60X74VUC	24X60X74C	24X60X74VC
72x54	1825x1370	24X72X54UC	24X72X54VUC	24X72X54C	24X72X54VC
72x62	1825x1550	24X72X62UC	24X72X62VUC	24X72X62C	24X72X62VC
72x74	1825x1850	24X72X74UC	24X72X74VUC	24X72X74C	24X72X74VC

\*Cart covers are non-returnable.

Note: 86" (2185mm) high covers, in 24" (610mm) depth, available by special order.



Clear Vinyl  
Cart Cover

### Clear Vinyl Cart Covers

- Allows visual access while protecting shelf contents from dust and other airborne contaminants.
- Vinyl construction with Velcro closures.
- Available for 18" x 36" (457 x 914mm) shelving.

Length/Height (in.)	Length/Height (mm)	Cat. No.
36x32	914x889	GWCVC41
36x52	914x1320	GWCVC62

✓ Indicates antimicrobial product.

## Keyboard Tray —{10.06}

Attaches to all Metro wire shelves, 36" (914mm) length or longer. Mouse Tray adapts to left or right of Keyboard Tray. Flip-top compartment provides convenient storage. Constructed of durable high-impact polystyrene. Assembles easily.

- Hardware included for attachment to Metro wire shelves; template provided for attachment to solid desk surfaces.
  - Keyboard Tray Dimensions: 22" L. (559mm) x 15 1/2" W. (394mm).
  - Dimension with Mouse Tray fully extended: 29 1/2" L. (749mm) x 15 1/2" W. (394mm).
- Cat. No. CKS1522BL



Keyboard Tray

## Wire Management Clip —{10.06}

Keeps wires and cables neatly organized both horizontally and vertically. Easily snaps over the edge of any Super Erecta wire or qwikSLOT shelf. Black epoxy finish.

Width (in.) (mm)		Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
2	51	2	51	.5	.25	CWM



Wire Management Clip

## Power Strip —{10.06}

- Mounts quickly and easily to either a Super Erecta or qwikSLOT post.
- Includes a 15 foot (4572mm) long cord.
- Mounting brackets and hardware included.
- UL/CSA Approved.
- 15 Amp Circuit Breaker.
- Illuminated Power Switch. 15A/125VAC. 60Hz/1875W.
- Gray/blue finish.
- 14/3 SJT Molded Power Supply Cord.

Width (in.) (mm)		Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
1 1/2	38	48	1219	6	2.72	CPS48




Power Strip

## Surface Mount Swing Arm for Flat Monitor —{10.06}

- Range: Vertical, 15.9" (404mm); Horizontal 24 1/4" (613mm)
- Vertical Rotation: 360 degrees at three joints
- Monitor tilt: 200 degrees
- Monitor pivot: landscape to portrait
- Compatibility: VESA® 75mm and 100mm
- Cable management: Cables are concealed in arm
- Maximum weight load: 27.5 lbs. (12.5kg)

Cat. No. LTFMA

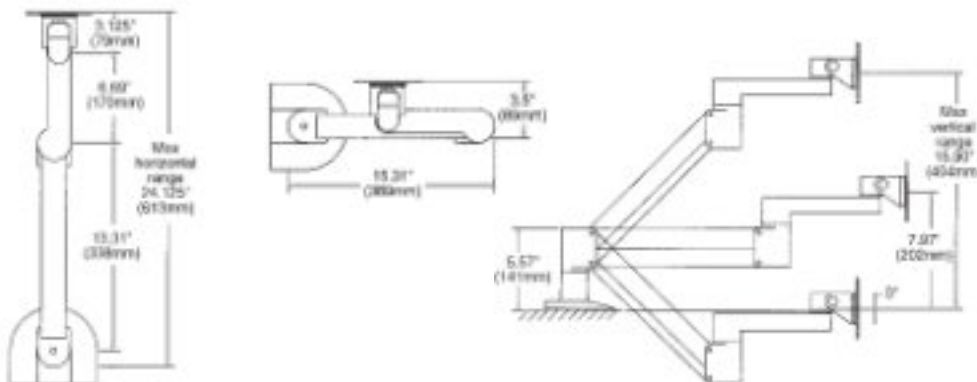



# KITCHEN STORAGE

## MAKEOVER

SPONSORED  
EXCLUSIVELY BY

**METRO**

**2018**

**Fort William  
Henry Hotel**

### BEFORE

Prep areas use limited space poorly. Walls and storage above are not optimized for productivity.

### AFTER

SmartWall®, SmartLever™ & PrepMate™ create a extremely functional space for wait staff and prep staff alike.

**“Truly a vast  
improvement  
by identifying  
unused wall  
space.”**

### BEFORE




Metro's SmartWall® creates the ideal set-up for a kitchen prep sink. Keeping all the items easily at hand and stored safely!

### AFTER



### AFTER

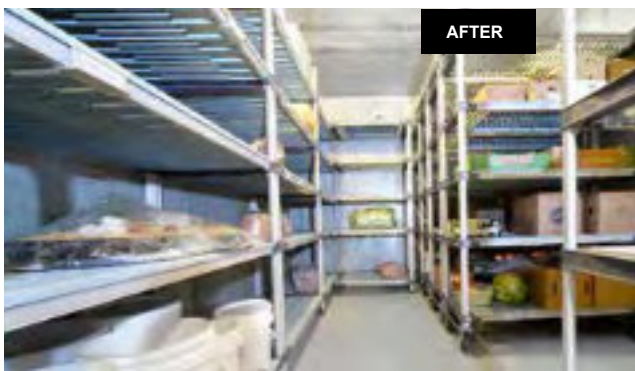


### BEFORE



Maximizing space begins with understanding what you will need to store. Shelf layout, shelf levels, rolling racks and pan racks placement should all be factored in!



**2019**  
  
**JCC of  
 Columbus**

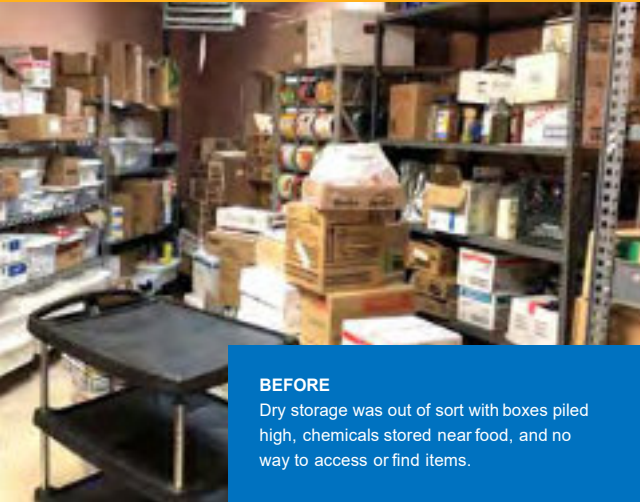

**BEFORE**


Dry storage was out of sort with boxes piled high, chemicals stored near food, and no way to access or find items.



**AFTER**


Super Erecta Shelving in a space efficient layout with 5 tiers, along with dividers, label holders and accessories transformed the space.

**“Wow... this  
 SmartWall®  
 is really...  
 smart!”**




**BEFORE**

Metro's SmartWall® creates the ideal set-up for the meat prep in this kosher kitchen. Keeping items labeled and right at hand!

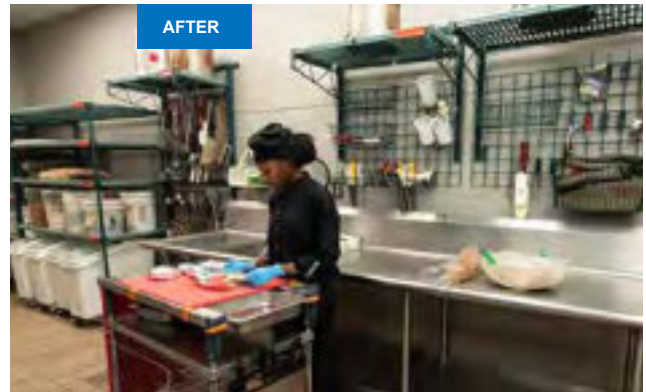


**AFTER**



**BEFORE**

The large stainless fab system was huge and not functional at all. Actually it had little usable space. Now, it's a prep dream... open & functional.

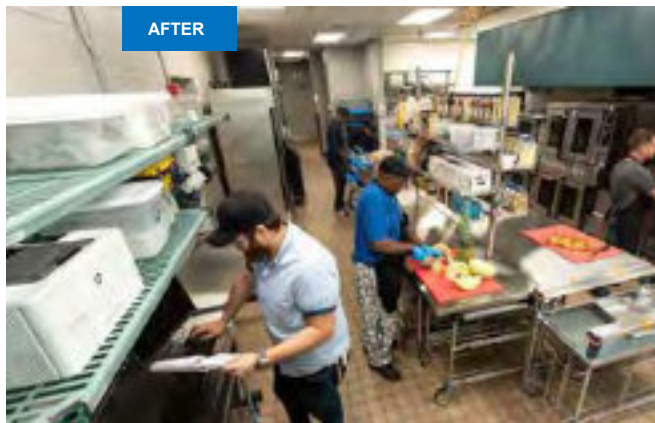

**AFTER**

**“This is the  
 crowning  
 achievement...  
 I love this prep  
 space.”**



Super Erecta qwikSLOT™ shelving unit in black epoxy

## qwikSLOT® Display Shelving System

### Set, Reset in a Flash.

Metro qwikSLOTshelvesoffer the quality of Super Erecta with the convenience of easily adjustable and removable shelves.

- Unique support systemsnapsinto the posts, allowing instant shelfadjustment.
- Eachunit requires a standard Super Erectashelf at the top and bottom. (see page 42)

### qwikSLOT® Shelves —{10.11}

Width/Length (in.)	Approx. Pkd. Wt. (lbs.)	Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
14x36	7.25	1436QBR	1436QC	1436QBL	1436QW	1436Q-DSG
14x48	9.75	1448QBR	1448QC	1448QBL	1448QW	1448Q-DSG
18x36	8.5	1836QBR	1836QC	1836QBL	1836QW	1836Q-DSG
18x48	11.25	1848QBR	1848QC	1848QBL	1848QW	1848Q-DSG
18x60	17.0	1860QBR	—	—	—	—
21x36	10.75	2136QBR	2136QC	2136QBL	2136QW	2136Q-DSG
21x48	13.25	2148QBR	2148QC	2148QBL	2148QW	2148Q-DSG
21x60	18.0	2160QBR	—	—	—	—
24x36	12.25	2436QBR	2436QC	2436QBL	2436QW	2436Q-DSG
24x48	15.25	2448QBR	2448QC	2448QBL	2448QW	2448Q-DSG
24x60	21.00	2460QBR	—	—	—	—

**Note:** A typical unit will incorporate 4 qwikSLOT posts, at least 2 standard Super Erecta shelves (one at the top and bottom of unit) and as many qwikSLOT shelves as desired between the top and bottom shelf.

**Note:** A qwikSLOT shelf is rated at 300 lbs. (135kg) per shelf. A typical qwikSLOT unit is rated at 800 lbs. (375kg) capacity per unit. For higher unit capacities, an intermediate standard Super Erecta shelf must be installed approximately at mid-height on the unit.

**Note:** Mobile Applications: All mobile applications require an intermediate standard Super Erecta shelf. installed approximately at mid-height on the unit.



qwikSLOT post with shelf clip

### qwikSLOT® Posts —{10.11}

Clipsnapinto slots along the height of the post for shelf adjustment at 1" (25mm) intervals. Use for qwikSLOTshelving only.

#### Stationary

Height† (in.)	Height† (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Brite	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
34 1/2	875	2 0.9	33PQ	33PQBL	33PQW	33PQ-DSG
54 9/16	1385	3 1.4	54PQ	54PQBL	54PQW	54PQ-DSG
63 9/16	1590	3 1/2 1.6	63PQ	63PQBL	63PQW	63PQ-DSG
74 5/8	1895	4 1.8	74PQ	74PQBL	74PQW	74PQ-DSG
86 5/8	2200	5 2.3	86PQ	86PQBL	86PQW	86PQ-DSG

†Height includes leveling bolt and cap.

#### Mobile

Height† (in.)	Height† (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Brite	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
33 7/8	861	2 0.9	33UPQ	33UPQBL	33UPQW	33UPQ-DSG
54	1370	3 1.4	54UPQ	54UPQBL	54UPQW	54UPQ-DSG
62	1575	3 1/2 1.6	63UPQ	63UPQBL	63UPQW	63UPQ-DSG
74	1880	4 1.8	74UPQ	74UPQBL	74UPQW	74UPQ-DSG
86	2185	5 2.3	86UPQ	86UPQBL	86UPQW	86UPQ-DSG

These posts come without leveling bolt assembly to accommodate stem casters.



#### qwikSLOT Locking Clip

Recommended for mobile applications.

Must be used with 9985QS shelf clips.

(Package of 4)

Cat. No. **9985QSL**



#### Replacement

qwikSLOT Shelf Clips

(Package of 4)

Cat. No. **9985QS**

### SET UP YOUR METRO STORE-WITHIN-A-STORE

1. Assemble your new Metro Display Shelving System (no tools required).
2. Remove upper shelves of your existing gondola unit. Do not remove the base shelf or kick panel.
3. Place your new Metro display shelving unit onto the gondola base shelf and slide into place.

**Metro Tip:** Order optional triangular foot plates to replace leveling bolts. Foot plates distribute heavy weight more evenly. (See page 47).





# Great for Retail Display.

Research shows sales and profits increase more than **43%**.


Data was collected from ten stores operated by three food retailers in the United States. The research covered 15 product categories and thousands of items. The research was conducted by Willard Bishop Consulting Ltd. and involved two areas of research:

- In-store merchandising tests and point-of-sale data analysis to quantify sales/profits and total category impact.
- Consumer focus groups to qualify consumer reaction.

Visit [www.metro.com/grocerysolutions](http://www.metro.com/grocerysolutions) and click on the link to Store-Within-A-Store Research.

**Sales and profits for specialty items increased more than 43%. Total category performance demonstrated a 12+% increase in sales and 14+% increase in profits.**

## Uniquely profitable.

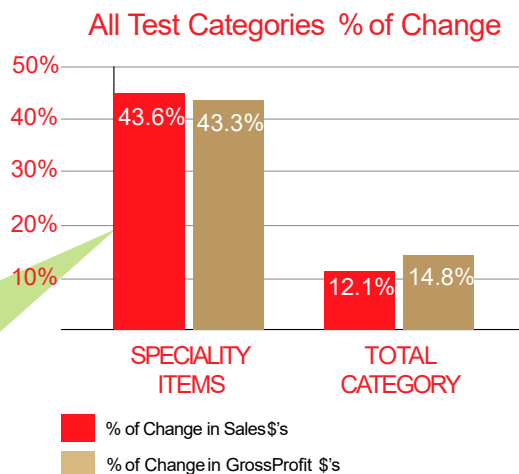

qwikSLOT® Display Shelving makes creating your Store-Within-A-Store simple and easy.





qwikSLOT Drop Mat Shelving

## qwikSLOT® Drop Mat® and Drop Mat® Super Erecta® Display Shelving —{10.11}

- Built-in shelf ledge, approximately 1" (25mm) high, provides security, preventing contents from falling off shelf.
- Each shelf holds up to 250 pounds (113kg). Available in SuperErecta and qwikSLOT styles.

## qwikSLOT® Drop Mat Shelves —{10.20}

Drop Mat shelving can increase storage capacity by as much as 30%. Each shelf holds up to 250 pounds (113kg). qwikSLOT style promotes ease of adjustment and removal. Each qwikSLOT unit requires the use of a SuperErecta or Drop Mat SuperErecta shelf at top and bottom. Use with qwikSLOT posts.

Width/ Length (in.)	Approx. Pkd. Wt. (lbs.)	Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
14x36	7.25	HDM1436QBR	HDM1436QC	HDM1436QBL	HDM1436QW	HDM1436Q-DSG
14x48	9.75	HDM1448QBR	HDM1448QC	HDM1448QBL	HDM1448QW	HDM1448Q-DSG
18x36	8.5	HDM1836QBR	HDM1836QC	HDM1836QBL	HDM1836QW	HDM1836Q-DSG
18x48	11.25	HDM1848QBR	HDM1848QC	HDM1848QBL	HDM1848QW	HDM1848Q-DSG
21x36	10.75	HDM2136QBR	HDM2136QC	HDM2136QBL	HDM2136QW	HDM2136Q-DSG
21x48	13.25	HDM2148QBR	HDM2148QC	HDM2148QBL	HDM2148QW	HDM2148Q-DSG
24x36	12.25	HDM2436QBR	HDM2436QC	HDM2436QBL	HDM2436QW	HDM2436Q-DSG
24x48	15.25	HDM2448QBR	HDM2448QC	HDM2448QBL	HDM2448QW	HDM2448Q-DSG

## Drop Mat® Super Erecta® Display Shelving — Use with qwikSLOT or SuperErecta posts

Width/Length (in.)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
14x36	355x914	7.25 3.2	HDM1436BR	HDM1436NC	HDM1436BL	HDM1436W	HDM1436-DSG
14x48	355x1219	9.75 4.3	HDM1448BR	HDM1448NC	HDM1448BL	HDM1448W	HDM1448-DSG
18x36	457x914	8.5 3.8	HDM1836BR	HDM1836NC	HDM1836BL	HDM1836W	HDM1836-DSG
18x48	457x1219	11.25 5.0	HDM1848BR	HDM1848NC	HDM1848BL	HDM1848W	HDM1848-DSG
21x36	530x914	10.75 4.8	HDM2136BR	HDM2136NC	HDM2136BL	HDM2136W	HDM2136-DSG
21x48	530x1219	13.25 5.9	HDM2148BR	HDM2148NC	HDM2148BL	HDM2148W	HDM2148-DSG
24x24	610x614	8.5 3.8	HDM2424BR	HDM2424NC	HDM2424BL	HDM2424W	HDM2424-DSG
24x36	610x914	12.25 5.5	HDM2436BR	HDM2436NC	HDM2436BL	HDM2436W	HDM2436-DSG
24x48	610x1219	15.25 6.8	HDM2448BR	HDM2448NC	HDM2448BL	HDM2448W	HDM2448-DSG

## qwikSLOT® Posts —{10.11}

Clip snap into slots along the height of the post for shelf adjustment at 1" (25mm) intervals. Use for qwikSLOT shelving only.

				STATIONARY				MOBILE			
Height† (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Plated	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Plated	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass
34½	875	2	0.9	33PQ	33PQBL	33PQW	33PQ-DSG	33UPQ	33UPQBL	33UPQW	33UPQ-DSG
54⅞	1385	3	1.4	54PQ	54PQBL	54PQW	54PQ-DSG	54UPQ	54UPQBL	54UPQW	54UPQ-DSG
63⅞	1590	3½	1.6	63PQ	63PQBL	63PQW	63PQ-DSG	63UPQ	63UPQBL	63UPQW	63UPQ-DSG
74⅝	1895	4	1.8	74PQ	74PQBL	74PQW	74PQ-DSG	74UPQ	74UPQBL	74UPQW	74UPQ-DSG
86⅝	2200	5	2.3	86PQ	86PQBL	86PQW	86PQ-DSG	86UPQ	86UPQBL	86UPQW	86UPQ-DSG

†Height includes leveling bolt and cap.

## Super Erecta SiteSelect® Posts —{10.01a}

		STATIONARY		MOBILE	
Height* (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Chrome	Cat. No. Black
7 1/2	191	1/2	0.3	7P	7PBL
14 1/2	370	1	0.5	13P	13PBL
27 1/2	699	1 3/4	0.75	27P	27PBL
34 1/2	875	2	0.9	33P	33PBL
54 9/16	1385	3	1.4	54P	54PBL
62 9/16	1590	3 1/2	1.6	63P	63PBL
74 5/8	1895	4	1.8	74P	74PBL
86 5/8	2200	5	2.3	86P	86PBL
96 5/8	2454	5 1/2	2.5	***96P	—

Mobile posts come without leveling bolt assembly to accommodate stem casters.

\* Height includes leveling bolt and cap.

\*\*\* 96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.

† Note: Special length posts are available, priced at next higher length plus a cutting charge. Post lengths to be specified as cut to a round number, ie: 74P cut to 69" (1753mm) . . . This will result in an overall post height with adjustment of 69 1/8" (1762mm) to 69 1/8" (1775mm).






### Snap-On Dividers for Drop Mat Shelves — {10.04}

Organize your shelves with these 8" (203mm) high, easy-to snap-in-place dividers.

Fits Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Plated	Cat. No. Black	Cat. No. White	Cat. No. Smoked Glass	Cat. No. Designer Colors*
18 457	2.5 1.1	HD18C	HD18B	HD18W	HD18-DSG	HD18-D
24 614	3.5 1.6	HD24C	HD24B	HD24W	HD24-DSG	HD24-D

\*Refer to page 131 for information about Designer Colors.

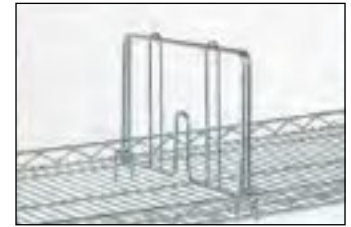

Snap-On Divider


# Get Maximum Retail Density.

## Drop Mat® Display Shelving.

Increase your shelving holding power by up to 30%.



Drop Mat yields spacesaving results.  
The spacegain is undeniable.

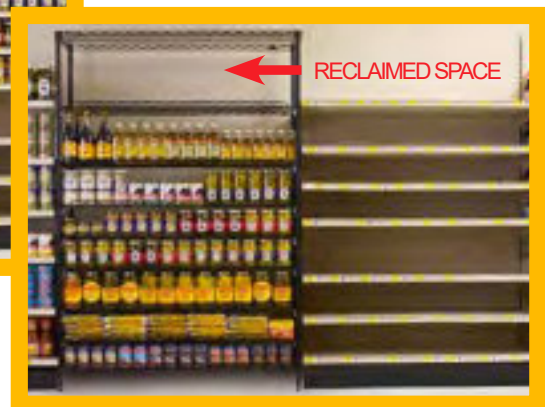

### What's the secret to increasing holding power?

- The secret to Metro's space-saving advantage is Drop Mat's "thin shelf" design (1/4" versus 1 1/2"). Drop Mat eliminates the need for space robbing under-shelf supports and bulky shelf brackets, reclaiming 20% of your merchandising space.
- Back-to-back, Drop Mat saves yet more space. Reclaim up to 10% additional space by eliminating traditional gondola's 4" wide center support structure.



# Two Quick Two Smart Two Bin



## Metro® Two-Bin™ Solutions take efficiency to the next level.

This two-bin solution offers better visibility to stored items, easier replenishment, and maximized storage space. Metro Two-Bin solutions provide a bin offering to accommodate varying supply sizes, a broad shelf offering to maximize storage and provide better visibility to stored items, and color coded markers to help identify supplies by type or application.

- Customizable shelf spacing and ability to use a variety of **Super Erecta®** shelves and posts maximize storage capacity. Available in stationary or mobile.

> Wide range of bin offerings to accommodate supply sizes

- **qwikSLOT®** shelves can be slanted for easy access to supplies while it's unique design allows for quick repositioning.

> Color coded markers and clear bins aid in swift visual identification



Metro® qwikSLOT® Shelving System  
Shown with Solid Bottom Shelf

Safely holds up to  
**800lbs.**  
800lbs. (375kg) per unit  
300 lbs. (135 kg) per shelf  
(qwikSLOT)

- Metro qwikSLOT® shelves offer the quality of Super Erecta® with the convenience of easily adjustable and removable shelves.
- Unique support system snaps into posts, allowing instant shelf adjustment without disturbing the shelves below or above.
- Versatile design allows shelves to be installed flat or at a unique angle for ultimate space and display efficiency. All shelves adjust in 1" increments.

## qwikSLOT® Shelves —{10.11}

Width/Length	SOLID Galvanized Cat. No.	qwikSLOT Brite Cat. No.	3-Sided Frame Super Erecta Chrome Cat. No.	STANDARD Super Erecta Chrome Cat. No.
18x36	<b>1836FG</b>	<b>1836QBR</b>	<b>SF33N3C</b>	<b>1836NC</b>
18x48	<b>1848FG</b>	<b>1848QBR</b>	<b>SF35N3C</b>	<b>1848NC</b>
18x60	<b>1860FG</b>	<b>1860QBR</b>	<b>SF36N3C</b>	<b>1860NC</b>
24x36	<b>2436FG</b>	<b>2436QBR</b>	<b>SF53N3C</b>	<b>2436NC</b>
24x48	<b>2448FG</b>	<b>2448QBR</b>	<b>SF55N3C</b>	<b>2448NC</b>
24x60	<b>2460FG</b>	<b>2460QBR</b>	<b>SF56N3C</b>	<b>2460NC</b>
Pkg of 4 Locking clips		<b>9985QSL</b>	-	-

**Note:** A typical unit will incorporate 4 qwikSLOT posts, at least 2 Super Erecta shelves (one at the top and bottom of unit) and as many qwikSLOT shelves as desired between the top and bottom shelf. A three sided frame is recommended for increased rigidity.

**Note:** A qwikSLOT shelf is rated at 300 lbs. (135kg) per shelf. A typical qwikSLOT unit is rated at 800 lbs. (375kg) capacity per unit. For higher unit capacities, an intermediate standard Super Erecta shelf must be installed approximately at mid-height on the unit.

**Note:** Mobile Applications: All mobile applications require an intermediate standard Super Erecta shelf installed approximately at mid-height on the unit.



**qwikSLOT Locking Clip**  
For mobile applications.  
To be used with qwikSLOT shelf clips. (Package of 4)  
Cat. No. 9985QSL



Castors types available  
for all mobile applications.

## qwikSLOT® Posts —{10.11}

qwikSLOT Stationary Posts Brite Cat. No.			qwikSLOT Mobile Posts Brite Cat. No.			Wheel Diameter (in) (mm)		Type	Resilient Tread Cat. No.	Polyurethane Tread Cat. No.
Height (in)	Height (mm)		Height (in)	Height (mm)						
34 <sup>1</sup> / <sub>2</sub>	875	<b>33PQ</b>	33 <sup>7</sup> / <sub>8</sub>	861	<b>33UPQ</b>	5	32	Swivel	<b>5M</b>	<b>5MP</b>
54 <sup>9</sup> / <sub>16</sub>	1385	<b>54PQ</b>	54	1370	<b>54UPQ</b>	5	132	Swivel/Brake	<b>5MB</b>	<b>5MPB</b>
63 <sup>9</sup> / <sub>16</sub>	1590	<b>63PQ</b>	62	1575	<b>63UPQ</b>					
74 <sup>9</sup> / <sub>8</sub>	1895	<b>74PQ</b>	74	1880	<b>74UPQ</b>					
86 <sup>5</sup> / <sub>8</sub>	2200	<b>86PQ</b>	86	2185	<b>86UPQ</b>					

## Metro Bins — {10.08}

Convenient way to organize and identify small items.

### Shelf Bins — Nesting

These bins are sized to work on the two most popular shelf widths 18" (457mm) and 24" (610mm) for efficient handling and exchange.



Part No.	Outside Dimension (in.)		Outside Dimension (mm)		Bin Carton Quantity	Color	Width Dividers**		Divider Carton Quantity
	Length / Width / Height		Length / Width / Height						
MB30110CLN	11.6 x 2.75 x 4		295 x 70 x 102		24	Clear	N/A		N/A
MB30120CLN	11.6 x 4.12 x 4		295 x 105 x 102		24	Clear	MB40120 (3)		24
MB30130CLN	11.6 x 6.6 x 4		295 x 168 x 102		12	Clear	MB40130 (3)		24
MB30150CLN	11.6 x 8.37 x 4		295 x 213 x 102		12	Clear	-		-
MB30170CLN	11.6 x 11.12 x 4		295 x 282 x 102		12	Clear	MB40170 (3)		24
MB30128CLN	17.8 x 4.12 x 4		454 x 105 x 102		12	Clear	MB40120 (3)		24
MB30138CLN	17.8 x 6.6 x 4		454 x 168 x 102		12	Clear	MB40130 (3)		24
MB30124CLN	23.6 x 4.12 x 4		600 x 105 x 102		12	Clear	MB40120 (3)		24
MB30164CLN	23.6 x 6.6 x 4		600 x 168 x 102		6	Clear	MB40130 (3)		24
MB30174CLN	23.6 x 10.6 x 4		600 x 270 x 102		2	Clear	MB40170 (3)		24

### Supply Bins — Stacking or Hanging

Stackable design maximizes vertical storage efficiency. Reinforced design adds strength and prevents spreading. Lip on rear of bin allows bin to hang on the wall panel.



Part No.	Outside Dimension (in.)		Outside Dimension (mm)		Bin Carton Quantity	Color	Length Dividers**		Divider Carton Quantity
	Length / Width / Height		Length / Width / Height						
MB30220CLSH	7.3 x 4.12 x 3		187 x 105 x 76		24	Clear	-		-
MB30237CLSH	9.25 x 6 x 5		235 x 152 x 127		12	Clear	N/A		N/A
MB30224CLSH	10.8 x 4.12 x 4		276 x 105 x 102		12	Clear	-		-
MB30230CLSH	10.8 x 5.5 x 5		276 x 140 x 127		12	Clear	MB40230 (1)		6
MB30235CLSH	10.8 x 11 x 5		276 x 279 x 127		6	Clear	MB40230 (2)		6
MB30239CLSH	10.8 x 8.25 x 7		276 x 210 x 178		6	Clear	-		-
MB30255CLSH	10.8 x 16.5 x 5		276 x 419 x 127		6	Clear	MB40230 (2)		6
MB30234CLSH	14.75 x 5.5 x 5		375 x 140 x 127		12	Clear	-		-
MB30240CLSH	14.75 x 8.25 x 7		375 x 210 x 178		12	Clear	MB40245 (1)		6
MB30250CLSH	14.75 x 16.5 x 7		375 x 419 x 178		12	Clear	MB40245 (1)		6
MB30265CLSH	18 x 8.25 x 9		457 x 210 x 229		6	Clear	MB40265 (1)		6

Note: Bins feature a full-width hanger lip that is designed for use with hanging systems. Bins are available in carton quantities only.

### Large Supply Bins — Stacking

Stackable design maximizes vertical storage efficiency. Reinforced design prevents spreading.



Part No.	Outside Dimension (in.)		Outside Dimension (mm)		Bin Carton Quantity	Color	Dividers	Divider Carton Quantity
	Length / Width / Height		Length / Width / Height					
MB30281CLS	20 x 12.37 x 8		508 x 314 x 203		3	Clear	-	-
MB30283CLS	20 x 18.37 x 12		508 x 467 x 305		1	Clear	-	-
MB30284CLS	23.8 x 8.25 x 7		606 x 210 x 178		4	Clear	-	-
MB30286CLS	23.8 x 11 x 7		606 x 279 x 178		4	Clear	-	-
MB30289CLS	23.8 x 18.25 x 12		606 x 464 x 305		1	Clear	-	-
MB30348T	20.5 x 8.25 x 7		521 x 210 x 178		6	Beige	width divider included	1

\*\* ( ) Recommended max # of dividers per bin = # of divider slots may be higher to provide placement flexibility

Note: Bins are available in carton quantities only. Bins above are priced per each but must be ordered in multiples of carton quantity. (For example: MB30138CLN is available in quantities of 12, 24, 36. List price refers to the price of 1 bin.) Dividers are available in carton quantities only. Dividers are sold by the carton and priced by the carton. (For example: 1 MB40120 = 24 dividers, the list price is for 24 dividers). N/A indicates no divider available. "-" indicates divider available by special request.

### Louvered Wall Panel

For use with hanging supply bins. This universal hanging surface provides easy placement and configuration of multiple sizes of bins or quikSIGHT Baskets. Wall-mounted panels keep items out of the way, off the floor and off the work table.

Part No.	Outside Dimension (in.)		Outside Dimension (mm)		Carton Quantity	Color	Weight Capacity	
	Length / Width / Height		Length / Width / Height				(lb.)	(kg)
MB1819LWP	18 x 0.31 x 19		457 x 8 x 483		4	White	160	73
MB3619LWP	36 x 0.31 x 19		914 x 8 x 483		4	White	160	73
MB1861LWP	18 x 0.31 x 61		457 x 8 x 1549		1	White	500	227

Note: Panel should be mounted on standard stud centers or a solid substrate (block, plywood, etc.) with fasteners in each mounting hole for maximum rigidity. Weight capacity listed is for the panel properly mounted to studs or a solid substrate. Fasteners are not included.



## Bulk Supply Tub — Nesting

Ruggedly constructed, perfect for storing large bulky items.

Part No.	Outside Dimension (in.)			Outside Dimension (mm)		
	Length	Width	Height	Length	Width	Height
<b>MB34240G</b>	24 1/2	19	9 1/2	622	483	241

**Note:** Bins are available in carton quantities only. Bins above are priced per each but must be ordered in multiples of carton quantity.

MB34240G



# Optimized for lean process.

## Metro Two-Bin™



### Two-Deep

As the first bin is consumed, it is placed on the top shelf for replenishment location while the second bin is pulled forward for use.



### Two-Wide

For items requiring more than half of the shelf depth. As the first bin is consumed, it is placed on the top shelf or replenishment location while the second bin is used.



### Two-High

As the first bin is consumed, it is placed on the top shelf or replenishment location while the contents of the lower bin are fully exposed for use.

### TWO - DEEP

Part No.	Type	Fits Shelf Width	Outside Dimensions (in.) Length / Width / Height	Outside Dimensions (mm) Length / Width / Height	Bin Carton Quantity	Length Dividers**	Width Dividers**	Divider Carton Quantity
<b>MB30220CLSH</b>	Stack/Hang Bin	18"	7.3 x 4.12 x 3	187 x 105 x 76	24	-	N/A	6
<b>MB30237CLSH</b>	Stack/Hang Bin	18"	9.25 x 6 x 5	235 x 152 x 127	12	N/A	N/A	N/A
<b>MB30224CLSH</b>	Stack/Hang Bin	24"	10.87 x 4.12 x 4	276 x 105 x 102	12	-	N/A	-
<b>MB30230CLSH</b>	Stack/Hang Bin	24"	10.87 x 5.5 x 5	276 x 140 x 127	12	<b>MB40230 (1)</b>	-	6
<b>MB30239CLSH</b>	Stack/Hang Bin	24"	10.87 x 8.25 x 7	276 x 210 x 178	6	-	N/A	-
<b>MB30235CLSH</b>	Stack/Hang Bin	24"	10.87 x 11 x 5	276 x 279 x 127	6	<b>MB40230 (2)</b>	N/A	6
<b>MB30255CLSH</b>	Stack/Hang Bin	24"	10.87 x 16.5 x 5	276 x 419 x 127	6	<b>MB40230 (2)</b>	N/A	6
<b>MB30110CLN</b>	Nesting Bins	24"	11.6 x 2.75 x 4	295 x 70 x 102	24	N/A	N/A	N/A
<b>MB30120CLN</b>	Nesting Bins	24"	11.6 x 4.12 x 4	295 x 105 x 102	24	N/A	<b>MB40120 (3)</b>	24
<b>MB30130CLN</b>	Nesting Bins	24"	11.6 x 6.6 x 4	295 x 168 x 102	12	N/A	<b>MB40130 (3)</b>	24
<b>MB30150CLN</b>	Nesting Bins	24"	11.6 x 8.37 x 4	295 x 213 x 102	12	N/A	-	-
<b>MB30170CLN</b>	Nesting Bins	24"	11.6 x 11.12 x 4	295 x 282 x 102	12	N/A	<b>MB40170 (3)</b>	24

### TWO - WIDE

Part No.	Type	Fits Shelf Width	Outside Dimensions (in.) Length / Width / Height	Outside Dimensions (mm) Length / Width / Height	Bin Carton Quantity	Length Dividers**	Width Dividers**	Divider Carton Quantity
<b>MB30128CLN</b>	Nesting Bins	18"	17.8 x 4.12 x 4	454 x 105 x 102	12	N/A	<b>MB40120 (3)</b>	24
<b>MB30138CLN</b>	Nesting Bins	18"	17.8 x 6.6 x 4	454 x 168 x 102	12	N/A	<b>MB40130 (3)</b>	24
<b>MB30265CLSH</b>	Stack/Hang Bin	18"	18 x 8.25 x 9	457 x 210 x 229	6	<b>MB40265 (1)</b>	N/A	6
<b>MB30124CLN</b>	Nesting Bins	24"	23.6 x 4.12 x 4	600 x 105 x 102	12	N/A	<b>MB40120 (3)</b>	24
<b>MB30164CLN</b>	Nesting Bins	24"	23.6 x 6.6 x 4	600 x 168 x 102	6	N/A	<b>MB40130 (3)</b>	24
<b>MB30174CLN</b>	Nesting Bins	24"	23.6 x 10.6 x 4	600 x 270 x 102	2	N/A	<b>MB40170 (3)</b>	24

### TWO - HIGH

Part No.	Type	Fits Shelf Width	(in.) Length / Width / Height	(mm) Length / Width / Height	Bin Carton Quantity	Length Dividers**	Width Dividers**	Divider Carton Quantity
<b>MB30284CLS</b>	Stacking Bin	24"	23.8 x 8.25 x 7	606 x 210 x 178	4	-	-	-
<b>MB30286CLS</b>	Stacking Bin	24"	23.8 x 11 x 7	606 x 279 x 178	4	-	-	-
<b>MB30289CLS</b>	Stacking Bin	24"	23.8 x 18.25 x 12	606 x 464 x 305	1	N/A	-	-

N/A indicates no divider available. "-" indicates divider available by special request.



Flat Solid Stainless Shelves with black powder-coated corners



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

## Super Erecta® Solid Shelving

### Setting the standard for solid shelving.

Perfect for applications involving spillage. Provides barrier between floor and bottom shelf contents to deter contamination.

- Shelf design features a 1/8" (3.2mm) raised "ship's edge" on all four sides to contain spills.
- Louvered/embossed shelf allows air circulation.
- Available in several styles and materials for a variety of applications. Shelves are constructed with 18-gauge stainless steel (Type 304) or galvanized materials.
  - Galvanized shelves with uncoated cast corners are ideal for applications requiring a solid shelving or work surface and minimum resistance to corrosion. Available in flat solid and louvered/embossed styles.
  - Standard Stainless Steel solid shelves (Type 304) with epoxy-coated cast corners address the majority of applications for solid, corrosion resistant shelves or work surfaces. Available in flat solid and louvered/embossed styles.
  - Premium Autoclave/Cart Washable Stainless Steel solid shelves (Type 304) feature an all-stainless construction to withstand high temperature, corrosive applications. Available in flat solid style.

#### Metro Tip:

Use Metro Flat Solid Shelving at the bottom of a storage unit to maintain cleanliness by providing a barrier between floor and shelf contents above.

### SiteSelect Posts for Super Erecta® Solid Shelving — {10.20}

Stationary posts are fitted with adjustable leveling bolts to compensate for uneven surfaces. Mobile posts come without leveling bolt to accommodate stem casters. Special length posts are available.†

Height* (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome Stationary	Cat. No. Chrome Mobile	Cat. No. Stainless Stationary**	Cat. No. Stainless Mobile
7 1/2	191	1 1/2	0.3	7P	7UP		
14 1/2	370	1	0.5	13P	13UP	13PS	13UPS
27 1/2	699	1 3/4	0.75	27P	27UP	27PS	27UPS
34 1/2	875	2	0.9	33P	33UP	33PS	33UPS
54 9/16	1385	3	1.4	54P	54UP	54PS	54UPS
62 9/16	1590	3 1/2	1.6	63P	63UP	63PS	63UPS
74 5/8	1895	4	1.8	74P	74UP	74PS	74UPS
86 5/8	2200	5	2.3	86P	86UP	86PS	86UPS
96 5/8	2454	5 1/2	2.5	***96P			

†Note: Special length posts are available, priced at next higher length plus a cutting charge. Post lengths to be specified as cut to a round number, ie: 74P cut to 69" (1753mm) . . . This will result in an overall post height with adjustment of 69 3/8" (1762mm) to 69 1/8" (1775mm).

\*Height includes leveling bolt and cap.

\*\*Stainless stationary post includes stainless leveling bolt.

\*\*\*96P should not be used on units less than 24" (610mm) deep. Consult Metro Engineering for alternate recommendations.

## Super Erecta® Solid Shelving — {10.20}

Shelves are priced and sold individually. For standard packaging, the number of shelves per box varies by size. 14"/18" (355/457mm) wide solid shelving: less than 60" (1524mm) long (no more than 4 per carton); 60" (1524mm) long (no more than 2 per carton); 21" (530mm) wide solid shelving: less than 42" (1066mm) long (no more than 4 per carton); 42" (1066mm) or longer (no more than 2 per carton); 24" (610mm) wide solid shelving: 24", 30" (610, 760mm) long (no more than 4 per carton); 36" (914mm) or longer (no more than 2 per carton).

Width/Length (in.) (mm)		Approx. Pkd. Wt. per Shelf (lbs.) (kg)		GALVANIZED		STANDARD STAINLESS STEEL	
				Cat. No. Flat	Cat. No. Louvered/Embossed	Cat. No. Flat	Cat. No. Louvered/Embossed
14x24	355x610	10	4.5	1424FG	1424LG	1424FS	1424LS
14x30	355x760	12	5.4	1430FG	1430LG	1430FS	1430LS
14x36	355x914	14	6.4	1436FG	1436LG	1436FS	1436LS
14x42	355x1066	15	6.8	1442FG	1442LG	1442FS	1442LS
14x48	355x1219	17	7.7	1448FG	1448LG	1448FS	1448LS
14x60	355x1524	22	9.9	1460FG	1460LG	1460FS	1460LS
18x24	457x610	11	5.0	1824FG	1824LG	1824FS	1824LS
18x30	457x760	14	6.4	1830FG	1830LG	1830FS	1830LS
18x36	457x914	16	7.3	1836FG	1836LG	1836FS	1836LS
18x42	457x1066	18	8.2	1842FG	1842LG	1842FS	1842LS
18x48	457x1219	20	9.1	1848FG	1848LG	1848FS	1848LS
18x60	457x1524	24	10.9	1860FG	1860LG	1860FS	1860LS
18x72	457x1829	29	13.2	1872FG	-	1872FS	-
21x24	530x610	13	5.9	2124FG	2124LG	2124FS	2124LS
21x30	530x760	15	6.8	2130FG	2130LG	2130FS	2130LS
21x36	530x914	18	8.2	2136FG	2136LG	2136FS	2136LS
21x42	530x1066	21	9.5	2142FG	2142LG	2142FS	2142LS
21x48	530x1219	23	10.4	2148FG	2148LG	2148FS	2148LS
21x60	530x1524	26	11.8	2160FG	2160LG	2160FS	2160LS
24x24	610x610	15	6.8	2424FG	2424LG	2424FS	2424LS
24x30	610x760	17	7.7	2430FG	2430LG	2430FS	2430LS
24x36	610x914	19	8.6	2436FG	2436LG	2436FS	2436LS
24x42	610x1066	21	9.5	2442FG	2442LG	2442FS	2442LS
24x48	610x1219	24	10.9	2448FG	2448LG	2448FS	2448LS
24x60	610x1524	31	14.0	2460FG	2460LG	2460FS	2460LS
24x72	610x1829	33	15.0	2472FG	-	2472FS	-

**Note:** Weight Capacity (evenly distributed load): Shelves 48" (1219mm) or less in length can hold up to 800 lbs. (363kg). 60" (1524mm) long shelves can hold up to 600 lbs. (272kg). 72" (1829mm) long shelves can hold up to 300 lbs. (136kg).

## Autoclavable/Cart-Washable Solid Stainless Shelving

All-stainless construction will address autoclave and cart washing applications.

Width/Length (in.) (mm)		Approx. Pkd. Wt. per Shelf (lbs.) (kg)		Cat. No. Autoclavable Stainless	Width/Length (in.) (mm)		Approx. Pkd. Wt. per Shelf (lbs.) (kg)		Cat. No. Autoclavable Stainless
14x24	355x610	10	4.5	1424NFS	21x24	530x610	13	5.9	2124NFS
14x30	355x760	12	5.4	1430NFS	21x30	530x760	15	6.8	2130NFS
14x36	355x914	14	6.4	1436NFS	21x36	530x914	18	8.2	2136NFS
14x42	355x1066	15	6.8	1442NFS	21x42	530x1066	21	9.5	2142NFS
14x48	355x1219	17	7.7	1448NFS	21x48	530x1219	23	10.4	2148NFS
14x60	355x1524	22	9.9	1460NFS	21x60	530x1524	26	11.8	2160NFS
18x24	457x610	11	5.0	1824NFS	24x24	610x610	15	6.8	2424NFS
18x30	457x760	14	6.4	1830NFS	24x30	610x760	17	7.7	2430NFS
18x36	457x914	16	7.3	1836NFS	24x36	610x914	19	8.6	2436NFS
18x42	457x1066	18	8.2	1842NFS	24x42	610x1066	21	9.5	2442NFS
18x48	457x1219	20	9.1	1848NFS	24x48	610x1219	24	10.9	2448NFS
18x60	457x1524	24	10.9	1860NFS	24x60	610x1524	31	14.0	2460NFS

## Super Erecta® Counter Units — {10.35}

To create a counter unit, select the following components:

- 2 each—14" (355mm) deep upper shelves, listed above
- 2 each—24" (610mm) deep lower shelves, listed above
- 2 each—upper front posts, listed below
- 2 each—lower front posts, listed below
- 2 each—63" (1600mm) or 74" (1880mm) high back posts (page 74).

## Special Posts For Counter Units — {10.35}

	Unit Height (in.) (mm)	Post Height* (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Plated	Cat. No. Stainless
Upper Front Posts	63 1600	28 <sup>5</sup> / <sub>8</sub> 727	1 <sup>1</sup> / <sub>2</sub> 0.7	27PF	27PFS
	74 1880	40 <sup>5</sup> / <sub>8</sub> 1032	2 0.9	39PF	39PFS
Lower Front Posts	All Heights	34 <sup>1</sup> / <sub>2</sub> 877	2 0.9	33PM	33PMS

\*Height includes leveling bolt and cap.

### Metro Tip:

Order aluminum split sleeves with stainless C-rings for corrosive, high-temperature autoclave or cart washing applications. (Cat. No. 9986S, one bag required per shelf).



Counter Unit with galvanized shelves.



4" (101mm) Ledges

## Shelf Ledges for Solid Shelves —{10.25}

Sturdy 4" (101mm) ledges contain items on shelves. Spring-clip tabs included for attachment.

Fits Shelf Length (in.) (mm)		Approx. Pkd. Wt. Per 6 Pieces (lbs.) (kg)		Cat. No. Plated	Cat. No. Stainless
14	355	7 1/2	3.4	L14WC	L14WS
18	457	9	4.1	L18WC	L18WS
21	530	10 1/2	4.7	L21WC	L21WS
24	610	12	5.4	L24WC	L24WS
30	760	13 1/2	6.0	L30WC	L30WS
36	914	16 1/2	7.4	L36WC	L36WS
42	1066	19 1/2	8.7	L42WC	L42WS
48	1219	22 1/2	10.1	L48WC	L48WS
60	1524	30	13.5	L60WC	L60WS

\*Actual ledge length is approximately 1" (25mm) shorter than nominal shelf length/width.  
**Note:** Standard spring-clip tabs are plated steel.



Rod with Tab in place

## Rods and Tabs for Solid Shelves —{10.25}

Create a more versatile system by enclosing sides and back of an entire unit. Tabs required to attach rods to a 4-shelf unit are supplied. Additional tabs also available in bags of 6.

### Rods

Min. Post Height (in.)	Rod Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Plated
54	52 1320	1	0.5	R52FC
63	60 1524	1	0.5	R60FC
74	72 1830	1 1/4	0.6	R72FC
86	84 2135	1 1/2	0.7	R84FC

**Note:** Standard spring-clip tabs are plated steel.

Additional Tabs  
 Bag of 6  
 Cat. No. 9184Z

**Note:** Standard tabs are plated steel

For applications requiring a corrosion proof solution, consult your Metro representative.



Shelf Dividers

## Shelf Dividers —{10.25}

The easy way to keep shelves orderly. Eight inch (203mm) high dividers attach with spring clips (provided).

Length (in.) (mm)		Approx. Pkd. Wt. Per 6 Pieces (lbs.) (kg)		Cat. No. Plated	Cat. No. Stainless
14	355	12	5.4	DD14FC	
18	457	13 1/2	6.0	DD18FC	DD18FS
21	530	15	6.8	DD21FC	
24	610	16 1/2	7.4	DD24FC	DD24FS

## Solid Shelf Joining Clamp —{10.25}

Savetime and money by eliminating adjacent posts and replacing with solid shelf joining clamps. Join units end-to-end, back-to-back or at right angles. Two clamps required per shelf to attach to adjacent units. Zinc. Cat. No. 9998Z

**Note:** Shelves with joining clamps can only be attached to shelves supported by two or more posts.



Joining Clamp

## Adjustable Undershelf Slides —{10.25}

Create a convenient drawer system by combining a tote box with these slides. Two slides are required, and can be spaced to fit any width container.

Item	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Solid
For 18" (457mm) wide shelf	1	0.4	US18FA
For 21" (530mm) wide shelf	1	0.4	US21FA
For 24" (610mm) wide shelf	1	0.4	US24FA

\*For application-specific totes, refer to index.



Adjustable Undershelf Slides



## Erecta Shelf® Shelving

This easy-to-assemble system puts space to work practically anywhere.

- Units go together without tools — shelf grooves simply lock into uprights at 5" (127mm) increments.
- Accessories create a truly versatile system.

### Erecta Shelf® Uprights — {10.50}

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome
12x53½	305x1359	7	3.2	1252C
12x63½	305x1613	8	3.3	1262C
12x73½	305x1867	9	4.1	1272C
12x88½	305x2248	11	5.0	1287C
18x53½	457x1359	8	3.3	1852C
18x63½	457x1613	9	4.1	1862C
18x73½	457x1867	11	5.0	1872C
18x88½	457x2248	13½	6.2	1887C

Packaging: 6 uprights to a carton.

### Erecta Shelf® Wire Shelves — {10.50}

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome
12x24	305x610	5	2.2	1224C
12x30	305x760	6	2.7	1230C
12x36	305x914	7	3.1	1236C
12x42	305x1066	8¼	3.7	1242C
12x48	305x1219	9½	4.2	1248C
12x60	305x1524	12	5.4	1260C
18x24	457x610	6½	2.9	1824C
18x30	457x760	8	3.6	1830C
18x36	457x914	10	4.5	1836C
18x42	457x1066	11	4.9	1842C
18x48	457x1219	12½	5.6	1848C
18x60	457x1524	16	7.2	1860C

### Shelf Dividers — {10.50}

Keep shelves orderly with these snap-in-place, 8" (203mm) high dividers.

Shelf Width (in.) (mm)	Approx. Pkd. Wt. Per 6 Pieces (lbs.) (kg)	Cat. No. Plated
12 305	12 5.4	DD12C
18 457	13½ 6.1	DD18C
24 610	16½ 7.4	DD24C



Shelf Divider

## HD Super® Solid Shelving

Heavy-duty system features 16-gauge solid shelves.

- Large 1<sup>5/8</sup>" (41mm) diameter posts and 2" (51mm) shelf adjustability.
- Shelf options include flat or louvered/embossed styles, and galvanized or stainless steel finishes.

### HD Super Flat Shelves — {10.65}

Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Galvanized	Cat. No. Stainless
18x36 457x914	21 9.5	1836HFG	1836HFS
18x42 457x1066	23 10.4	1842HFG	1842HFS
18x48 457x1219	26 11.7	1848HFG	1848HFS
18x54 457x1370	28 12.7	1854HFG	1854HFS
18x60 457x1524	31 14.0	1860HFG	1860HFS
24x36 610x914	25 11.3	2436HFG	2436HFS
24x42 610x1066	29 13.1	2442HFG	2442HFS
24x48 610x1219	32 14.4	2448HFG	2448HFS
24x54 610x1370	35 15.8	2454HFG	2454HFS
24x60 610x1524	38 17.1	2460HFG	2460HFS

### HD Super® Louvered/Embossed Shelves — {10.65}

Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stainless
18x36 457x914	21 9.5	1836HLS
18x42 457x1066	23 10.4	1842HLS
18x48 457x1219	26 11.7	1848HLS
18x54 457x1370	28 12.7	1854HLS
18x60 457x1524	31 14.0	1860HLS
24x36 610x914	25 11.3	2436HLS
24x42 610x1066	29 13.1	2442HLS
24x48 610x1219	32 14.4	2448HLS
24x54 610x1370	35 15.8	2454HLS
24x60 610x1524	38 17.1	2460HLS

**Note:** The weight capacity of a HD Super Shelf is 1,000 lbs. (457kg) per shelf, evenly distributed across shelf.

### HD Super® Stationary Posts — {10.65}

Height* (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Stainless
56 1421	5.8 2.6	54HPC	54HPS
64 1624	6.3 2.9	63HPC	63HPS
76 1929	7.5 3.4	74HPC	74HPS

\*Height includes leveling foot and cap.

**Note:** Special length posts are available. For more information, contact your Metro representative.

**Packaging:** 4 posts to a carton.

### HD Super® Stem Caster Posts — {10.65}

Height* (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Stainless
54 <sup>9/16</sup> 1386	5.7 2.5	54UHPC	54UHPS
62 <sup>9/16</sup> 1590	6.3 2.8	63UHPC	63UHPS
74 <sup>5/8</sup> 1894	7.5 3.3	74UHPC	74UHPS

### HD Super® Stem Casters — {10.65}


Includes donut bumpers with each caster.

Wheel Diameter (in.) (mm)	Face Diameter (in.) (mm)	Type	Wheel Tread	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
5 127	1 <sup>1/2</sup> 38.1	Swivel	Polyurethane	3 <sup>1/2</sup> 1.5	5HHP
5 127	1 <sup>1/2</sup> 38.1	Brake	Polyurethane	3 <sup>3/4</sup> 1.5	5HHPB

Load rating per caster: 400 lbs. (182kg).



HD Super Solid Stainless Shelving with black powder-coated corners



HD Super Post



HD Super Stem Caster Post



HD Super Stem Caster


Stainless solid shelving has black powder-coated corners. Galvanized solid shelving has uncoated cast corners.

HD Super® shelves, posts, and casters are not compatible with Super Erecta or Super Adjustable Super Erecta components.

## HD Super® Dunnage Shelves — {10.67}

Static load capacity (uniformly distributed)

- 48" (1219mm) shelf: 3,000 lbs. (1361kg).
- 60" (1524mm) shelf: 2,400 lbs. (1089kg).
- Foruseon H.D. 1<sup>5</sup>/<sub>8</sub>" (41mm) posts only.
- Removable wire deck.

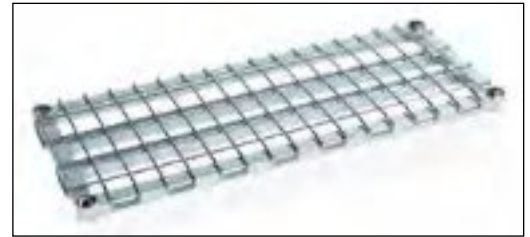

HD Super Dunnage Shelf

Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
18x48 457x1219	35 15.7	1848HDC	1848HDK3	1848HDS
18x60 457x1524	43 19.3	1860HDC	1860HDK3	1860HDS
24x48 610x1219	38 17.1	2448HDC	2448HDK3	2448HDS
24x60 610x1524	47 21.1	2460HDC	2460HDK3	2460HDS

**Important:** In stationary shelving, stability decreases as the ratio of height to width increases and when heavier loads are placed on upper shelves. Keep units as wide and low as possible, using the dunnage shelf as the bottom shelf. If two dunnage shelves are being used, both should be placed within the lower half of the unit.

**Note:** Not compatible with Super Erecta or Super Adjustable Super Erecta components.

## HD Super® Cantilever Shelf — {10.67}

Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Stainless
12x54 304x1372	11.8 5.3	1254CHC	1254CHS
12x60 304x1524	12.7 5.7	1260CHC	1260CHS



HD Super™ Cantilever Shelf

## HD Super® Replacement Parts — {10.65}

Replacement HD Super™ Aluminum Split Sleeves with Zinc Ring  
4 pair per bag  
Cat. No. 9986HZ



Replacement HD Super™ Aluminum Split Sleeve

## Replacement HD Super® Plastic Split Sleeves

4 pair per bag  
Plastic — Cat. No. 9985H



Replacement HD Super™ Plastic Split Sleeve

## Post Clamps

Cat. No. 9994HZ



Post Clamp

## Replacement 5<sup>1</sup>/<sub>2</sub>" (140mm) Donut Bumpers

Cat. No. 9992H  
Abovefit 1<sup>5</sup>/<sub>8</sub>" (41mm) posts only.



Replacement 5<sup>1</sup>/<sub>2</sub>" (140mm) Donut Bumper

## 3<sup>1</sup>/<sub>2</sub>" (89mm) Foot Plates

Cat. No. 9993HS



3<sup>1</sup>/<sub>2</sub>" (89mm) Foot Plate

## Wall Mounting Brackets

(not shown)  
Cat. No. 9984HZ

✓ Indicates antimicrobial product.



Every  
process  
optimized.

Every  
item within  
reach.





SmartWall®  
SmartLever™  
SmartStation™  
HD Super®

# WALL SHELVING, WORKSTATIONS & WORKTABLES

SmartWall Grid & Wall Shelving .....	82-90
PrepMateMultiStations .....	91-92
SmartLeverMultifunctional Workstations .....	93-95
SmartStation Productivity Workstations.....	96-97
StainlessSteel Worktables & Accessories .....	98-101
Heavy-Duty Work Tables& Accessories.....	102-104



# Wall-to-wall efficiency.

**A unique storage and workstation system for often underutilized wall space.**

Wall-mounted tracks are the foundation for attaching . . .

- Productivity stations with grids, accessories, and storage shelves
- Wall Shelving using uprights and Metro shelves
- Customizable storage space using combinations of shelving, grids, and specialized accessories

**SmartWall will keep these areas cleaner and more organized.**

- Prep areas
- Janitorial supply
- Above carts that are in a staging area or a storage room
- Above sinks, work tables, casework, equipment, or bulk floor storage



**Flexible, Robust Design:** Wall tracks and uprights are designed to interface with wood studs, plywood, concrete, and other suitable wall structures.

**Easyto Adapt:** Uprights and grid brackets can be easily repositioned along the track before being fastened to the wall. Shelves and accessories are easyto add and remove.

**Easyto Install:** Once the tracks are installed level, shelving and task stations can be quickly configured.

**Easyto Clean:** Shelves, shelf supports, and grids can easily be removed for thorough cleaning of walls. Wall tracks and uprights can easily be wiped clean.

**Durable Finishes:** SuperErectaBrite for dry environments; Metroseal 3 epoxy for wet or damp environments with built-in Microban® antimicrobial product protection to inhibit the growth of bacteria, mold, mildew, and fungus that cause odors and product degradation.



## General Guidelines

### Selecting Wall Tracks.

Wall track or combination of tracks must be at least 2" (51mm) longer than the desired span of shelves. 1" (25mm) on each end of the span of tracks is reserved for hardware that acts as a stop. *(Example: If 152" (3860mm) of wall track could be mounted, then the length of a shelftier cannot exceed 150" (3810mm)).*

### Uprights.

15" (381mm) uprights: 1 shelftier maximum  
 30" (762mm) uprights: 3 shelftiers maximum  
 45" (1143mm) uprights: 4 shelftiers maximum

### Shelves.

When configuring side-by-side shelving units, the adjacent shelves on the same tier must have the same depth. Minimum space between shelf tiers is 9" (229mm).

Note: When using MetroMax i shelves with SmartWall G3 shelf supports, order one adapter kit per shelf (Cat. No. M9997-4).

### Shelf Supports.

Order to match up with the depth of the shelf.

## Configuring Basic Wall Shelving



## Ordering Guide

### Single Shelving Unit

1. Select a wall track or tracks.
2. Select two uprights.
3. Select from Super Erecta wire or solid shelves, Super Erecta Pro, MetroMax Q, or MetroMax i shelves.
4. Select single shelf supports (2 per shelf)

To order the unit pictured:

Qty.	Cat. No.	
1	SW40BR	Wall Track
2	SWU45BR	Upright
1	2436BR	Wire Shelf
2	SWS24BR	Single Shelf Support
2	1836BR	Wire Shelf
4	SWS18BR	Single Shelf Support



### Side-by-Side Shelving Unit

To order the unit pictured:

Qty.	Cat. No.	
1	SW56K3	Wall Track
1	SW40K3	Wall Track
4	SWU30K3	Upright
6	1830NK3	Wire Shelf
4	SWS18K3	Single Shelf Support
4	SWD18K3	Double Shelf Support



Single shelf supports are used on the ends of the wall shelf unit. Double (or Intermediate) shelf supports are used to join adjacent units.



**S**  
Single Shelf Support



**D**  
Double (Intermediate) Shelf Support

## Configuring Basic Task Stations



### General Guidelines

#### Selecting Wall Tracks

Wall track or combination of tracks must be at least 2" (51mm) longer than the desired span of shelves. 1" (25mm) on each end of the span of tracks is reserved for hardware that acts as a stop. (Example: If 152" (3860mm) of wall track could be mounted, then the length of a shelf tier cannot exceed 150" (3810mm).

#### Grids

Grids may attach directly to the uprights. Grids may not overhang the uprights by more than 6" (152mm). When uprights are not used, select the appropriate grid bracket kit based on the configuration.

#### Uprights and Shelf Supports

Enable standard Super Erecta, Super Erecta Pro, MetroMax Q, and MetroMax i shelves to be used as part of the task station.

#### Combinations of Grids and Shelves

Grids can be mounted directly behind shelves, but shelf supports and grids cannot occupy the same slots on the upright. Once the grid has been mounted to the upright, the shelf support can be mounted to its own slots and can be adjusted on 3" (76mm) increments within the grid space.

## Ordering Guide

### Medium-Duty Task Station — up to 400 lbs. (181kg) unit capacity

1. Select wall track or tracks.
2. Select uprights. (two per task station)
3. Select shelves and single shelf supports. (two supports per shelf)
4. Select grid and accessories.

#### Notes:

- Most often shelves and grids of the same length are used together.
- Maximum unit capacity when mounted to wood studs or plywood is 400 lbs. (181kg).

**Note:** Refer to catalog sheet 10.42 for weight capacities in other types of wall construction.

### Standard-Duty Task Station — up to 250 lbs. (113kg) unit capacity

1. Select wall track or tracks.
2. Select grid or multiple grids.
3. Select SWGB1 grid bracket kit. (one per grid)
4. Select accessories including bulk grid shelves (pictured).

#### Notes:

- Maximum unit capacity when mounted to wood studs or plywood is 250 lbs. (113kg).

**Note:** Refer to catalog sheet 10.42 for weight capacities in other types of wall construction.

- Grids may be mounted to the wall without wall tracks using SWGB2 or WGBRKT grid bracket kits.



#### Consists of:

Qty.	Cat. No.	
1	SW40K3	Wall Track
2	SWU30K3	Upright
1	1836NK3	Wire Shelf
2	SWS18K3	Single Shelf Support
1	WG1836K3	Wire Grid
1	SWA1	Accessory Pack



#### Consists of:

Qty.	Cat. No.	
1	SW40K3	Wall Track
1	WG3036K3	Wire Grid
1	SWGB1	Grid Bracket Kit
1	GS1836K3	Grid Shelf
1	SWA2	Accessory Pack



## Easy Order Kits

### Medium-Duty Task Station — {10.42b}

Cat. No. SWK36-1

- Bulk overhead storage space with a 1836NK3 wire shelf
- 18" x 36" (457 x 914mm) grid space
- 40" (1016mm) track
- Overall dimensions: Length x Height  
40" x 31 1/4" (1016 x 793mm)

Consists of:

Qty.	Cat. No.	
1	SW40K3	Wall Track
2	SWU30K3	Upright
2	SWS18K3	Single Shelf Support
1	1836NK3	Shelf
1	WG1836K3	Wire Grid



### Standard-Duty Task Station — {10.42b}

Cat. No. SWK36-2

- Standard duty 50 lb. capacity overhead shelf
- 40" (1016mm) track and 30" x 36" (762 x 914mm) grid space
- Overall dimensions: Length x Height  
40" x 39 11/16" (1016 x 1008mm)

Consists of:

Qty.	Cat. No.	
1	SW40K3	Wall Track
1	SWGB1	Grid Bracket Kit
1	WG3036K3	Grid
1	GS1836K3	Grid Shelf



### Accessory Pack Sink — {10.42b}

Cat. No. SWA1

- Packaged in one carton
- To fit minimum 18" x 36" (457 x 914mm) grid space
- Grids not included

Consists of:

Qty.	Cat. No.	
1	H210K3	Wire Basket
1	IWA-11K3	Lid Holder
1	FCH	Utensil Cylinder
1	FC1	Cylinder Holder
2	PGHK6K3	Prong Hook
6	HK23C	Standard Hook



Wire Grid and Grid Brackets Not Included.

### Accessory Pack Prep — {10.42b}

Cat. No. SWA2

- Packaged in one carton
- To fit minimum 18" x 36" (457 x 914mm) grid space
- Grids not included

Consists of:

Qty.	Cat. No.	
1	PBA-GSDK3	Small Shelf
2	H210K3	Wire Basket
1	DD3722A	Bin Holder
1	MB30230CLSH	Small Bin
2	PGHK6K3	Prong Hook
6	HK23C	Standard Hook



Wire Grid and Grid Brackets Not Included.



### Complete Smartwall Sink Kit

Cat. No. SWK36-1A1-SR

- Packaged in one carton
- Includes as shown.  
Contents of SWK36-1, SWA1



### Complete Smartwall Prep Kit


Cat. No. SWK36-1A2-SR

- Packaged in one carton
- Includes as shown.  
Contents of SWK36-1, SWA2

## SmartWall Components — {10.42}



Wall Track



Hardware

Wall Tracks (minimum one per system)

- Joiner plates and stop fastener hardware included. Does not include hardware to mount wall tracks to the wall.
- Replacement joiner plate (1) and stop fastener hardware (2 sets): Cat. No. RPTRK-HDWE

Actual Length (in.)	Actual Length (mm)	Actual Depth (in.)	Actual Depth (mm)	Actual Width (in.)	Actual Width (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Super Erecta Brite	Cat. No. Metroseal 3
40	1016	3/4	19	1 9/16	40	5.0	2.2	SW40BR	SW40K3
56	1423	3/4	19	1 9/16	40	6.0	2.6	SW56BR	SW56K3
72	1829	3/4	19	1 9/16	40	7.0	3.1	SW72BR	SW72K3

\*Note: Tracks can be cut to length, but Metro does not provide this service. Touch-up paint for Metroseal 3 tracks is available.

## Uprights (Formedium-duty applications, minimum two per system. Sold by the piece)

- Built-in slots allow shelf supports and grids to attach without tools or hardware.
- 1 1/2" (38mm) slot spacing allows shelves and grids to be adjusted on 1 1/2" (38mm) increments

Actual Length (in.)	Actual Length (mm)	Actual Width (in.)	Actual Width (mm)	Actual Depth (in.)	Actual Depth (mm)	Number of Slots	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Super Erecta Brite	Cat. No. Metroseal 3
16	406	1 1/8	29	1 7/8	48	7	1.8	0.8	SWU15BR	SWU15K3
31	787	1 1/8	29	1 7/8	48	17	3.5	1.5	SWU30BR	SWU30K3
44 1/2	1130	1 1/8	29	1 7/8	48	26	5.3	2.3	SWU45BR	SWU45K3

## Shelf Supports (Sold by the piece)

- Mount directly to slotted uprights. Suitable for use with Super Erecta, MetroMax Q, and MetroMax i shelves.
- Single shelf supports are used on each end of a single unit or side-by-side unit.
- Double (intermediate) shelf supports are used when configuring side-by-side wall shelving units.

### Single Shelf Supports

Fits shelf depth	Actual Length (in.)	Actual Length (mm)	Actual Width (in.)	Actual Width (mm)	Actual Height (in.)	Actual Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Super Erecta Brite	Cat. No. Metroseal 3
14" (355mm)	16 9/16	421	1 1/2	38	8 3/16	208	2.5	1.1	SWS14BR	SWS14K3
18" (457mm)	20 9/16	522	1 1/2	38	8 3/16	208	3.0	1.3	SWS18BR	SWS18K3
21" (530mm)	23 9/16	598	1 1/2	38	8 3/16	208	3.5	1.5	SWS21BR	SWS21K3
24" (610mm)	26 9/16	675	1 1/2	38	8 3/16	208	3.5	1.5	SWS24BR	SWS24K3

\*Note: Replacement plastic sleeve for shelf support. Cat. No. RP-SPSLV.

Note: When using MetroMax i shelves with shelf supports, please order 1 adapter kit per shelf. Cat. No. M9997-4

### Double (Intermediate) Shelf Supports

Fits shelf depth	Actual Length (in.)	Actual Length (mm)	Actual Width (in.)	Actual Width (mm)	Actual Height (in.)	Actual Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Super Erecta Brite	Cat. No. Metroseal 3
14" (355mm)	16 9/16	421	1 1/2	38	8 3/16	208	2.5	1.1	SWD14BR	SWD14K3
18" (457mm)	20 9/16	522	1 1/2	38	8 3/16	208	3.0	1.3	SWD18BR	SWD18K3
21" (530mm)	23 9/16	598	1 1/2	38	8 3/16	208	3.5	1.5	SWD21BR	SWD21K3
24" (610mm)	26 9/16	675	1 1/2	38	8 3/16	208	3.5	1.5	SWD24BR	SWD24K3


\*Note: Replacement plastic sleeve for shelf support. Cat. No. RP-SPSLV.

Note: When using MetroMax i shelves with shelf supports, please order 1 adapter kit per shelf. Cat. No. M9997-4


## Grid Mounting Brackets (for standard-duty applications without uprights)

- Use to connect the grid to the wall when uprights are not used. One kit required per grid.


Description	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
Bracket kit to connect grid to wall track; includes (2) top and (4) bottom (stainless steel)	2.0	0.9	SWGB1
Direct wall mount bracket kit; consists of (6) bottom brackets (stainless steel)	2.0	0.9	SWGB2
Direct wall mount bracket kit; consists of (6) black plastic brackets	2.0	0.9	WGBRKT



Single Support



Double (intermediate) Support



SWGB1

x4




SWGB2

WGBRKT

x6

x6

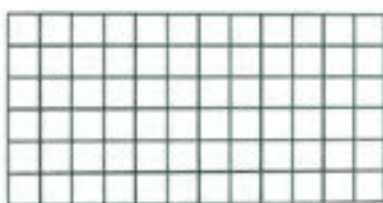



Grid: 18" x 36" (457 x 914mm)

## Wire Grids

- Brackets to mount the grid to the wall track or the wall are not included and can attach directly to uprights without brackets or tools.
- Grid openings measure approximately 3" x 3" (76 x 76mm)

Width x Length (in.)	Width x Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Plated	Cat. No. Metroseal 3
18x30	457x760	7.5	3.3	—	WG1830K3
18x36	457x914	9.0	4.1	WG1836BR	WG1836K3
18x48	457x1219	12.0	5.4	WG1848BR	WG1848K3
18x60	457x1524	14.0	6.4	WG1860BR	WG1860K3
24x36	610x914	12.0	5.4	—	WG2436K3
24x48	610x1219	15.5	7.0	—	WG2448K3
30x36	760x914	12.8	5.8	—	WG3036K3
30x48	760x1219	16.5	7.5	—	WG3048K3
33x54	838x1370	21.0	9.5	PBA-GPC	—

\*Note: Can be retrofitted to original MetroMax and MetroMax Q shelving.

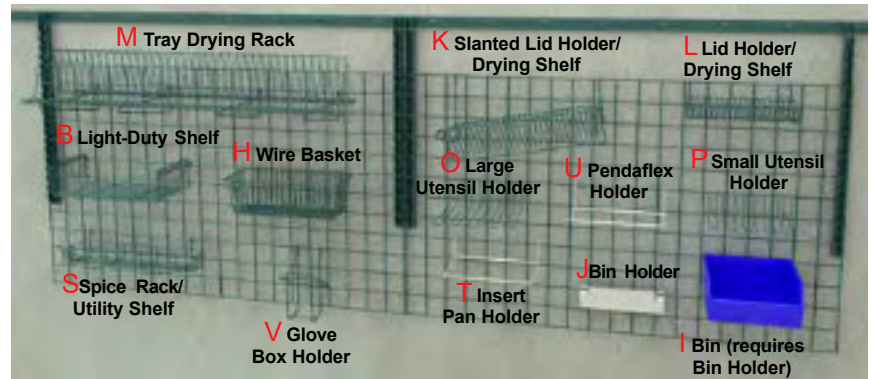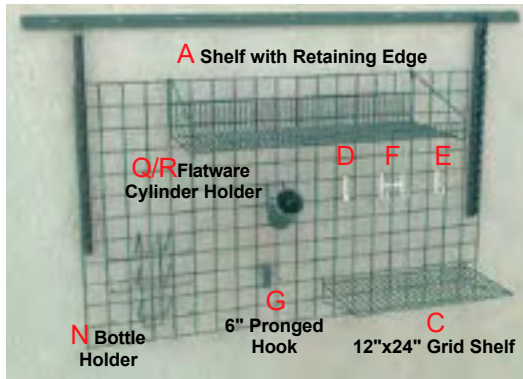

## Accessories for Grids — {10.42}

### Shelves for Grids

		Width/Length/Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Plated	Cat. No. Metroseal 3
<b>A</b>	14"x36" (356x914mm) Shelf w/Retaining Edge	15 <sup>5</sup> / <sub>8</sub> x35 <sup>1</sup> / <sub>4</sub> x7 <sup>3</sup> / <sub>4</sub>	391x895x197	12 4.5	—	<b>GS1436K3</b>
<b>A</b>	14"x48" (356x1219mm) Shelf w/Retaining Edge	15 <sup>5</sup> / <sub>8</sub> x47 <sup>1</sup> / <sub>4</sub> x7 <sup>3</sup> / <sub>4</sub>	391x1200x197	16 6.0	—	<b>GS1448K3</b>
<b>A</b>	18"x30" (457x762mm) Shelf w/Retaining Edge	19 <sup>5</sup> / <sub>8</sub> x29 <sup>1</sup> / <sub>4</sub> x7 <sup>3</sup> / <sub>4</sub>	492x743x197	15 5.6	—	<b>GS1830K3</b>
<b>A</b>	18"x36" (457x914mm) Shelf w/Retaining Edge	19 <sup>5</sup> / <sub>8</sub> x35 <sup>1</sup> / <sub>4</sub> x7 <sup>3</sup> / <sub>4</sub>	492x895x197	18 6.7	—	<b>GS1836K3</b>
<b>A</b>	18"x48" (457x1219mm) Shelf w/Retaining Edge	19 <sup>5</sup> / <sub>8</sub> x47 <sup>1</sup> / <sub>4</sub> x7 <sup>3</sup> / <sub>4</sub>	492x1200x197	24 9.0	—	<b>GS1848K3</b>
<b>B</b>	Light-Duty Shelf with Side Ledges	9 W.x18 <sup>1</sup> / <sub>2</sub> L.	228 W.x470 L.	4 1.8	<b>PBA-GSD</b>	<b>PBA-GSDK3</b>
<b>C</b>	Flat Grid Shelf — 24" (610mm)	12 <sup>11</sup> / <sub>16</sub> x24x4	322x610x102	7 2.6	—	<b>FGS1224K3</b>

### Hooks

		Width/Length/Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal
<b>D</b>	Small Hook	1 <sup>1</sup> / <sub>4</sub> x3 <sup>1</sup> / <sub>2</sub>	32x89		<b>HK23C</b>	—
<b>E</b>	Large Hook	2x3 <sup>1</sup> / <sub>2</sub>	50x89		<b>HK25C</b>	—
<b>F</b>	Double Large Hook	2x3 <sup>1</sup> / <sub>2</sub>	50x89		<b>HK26C</b>	—
<b>G</b>	6" (152mm) Pronged Hook	1 <sup>1</sup> / <sub>4</sub> x7 <sup>5</sup> / <sub>8</sub> x5 <sup>5</sup> / <sub>8</sub>	32x194x92	.3 0.1	—	<b>PGHK6K3</b>

### Baskets

		Width/Length/Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3
<b>H</b>	Small Basket	13 <sup>3</sup> / <sub>8</sub> x5x7	345x127x180	8.5 4	<b>H209C</b>	<b>H209K3</b>
<b>H</b>	5" (127mm) Deep Large Basket	17 <sup>3</sup> / <sub>8</sub> x7 <sup>1</sup> / <sub>2</sub> x5	440x190x127	7 3	<b>H210C</b>	<b>H210K3</b>
<b>H</b>	10" (254mm) Deep Large Basket	17 <sup>3</sup> / <sub>8</sub> x7 <sup>1</sup> / <sub>2</sub> x10	440x190x255	11 5	<b>H212C</b>	<b>H212K3</b>

### Bins and Holders

		Width/Length/Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
<b>I</b>	Clear Bin Packed 12/Ctn.	10 <sup>7</sup> / <sub>8</sub> x5 <sup>1</sup> / <sub>2</sub> x5	279x140x127	1 0.45	<b>MB30230CLSH</b>
<b>I</b>	Clear Bin Packed 6/Ctn.	10 <sup>7</sup> / <sub>8</sub> x11x5	279x280x127	1.5 0.68	<b>MB30235CLSH</b>
<b>I</b>	Clear Bin Packed 12/Ctn.	14 <sup>3</sup> / <sub>4</sub> x8 <sup>1</sup> / <sub>4</sub> x7	375x210x180	2 0.91	<b>MB30240CLSH</b>
<b>J</b>	Single Bin Holder	3x <sup>1</sup> / <sub>2</sub> (LxH)	76x13 (LxH)	0.5 0.23	<b>DD3722A</b>
<b>J</b>	Small Bin Holder	11x3 (LxH)	280x76 (LxH)	1 .45	<b>PBA-1BH</b>
<b>J</b>	Large Bin Holder	22x3	559x76 (LxH)	2 .91	<b>PBA-2BH</b>

### Drying Rack Accessories

		Width/Length/Height (in.)	(mm)	Pkd. Wt. (lbs.) (kg)	Cat. No. Plated	Cat. No. Metroseal 3
<b>K</b>	Slanted Lid Holder/Drying Shelf	14 <sup>1</sup> / <sub>8</sub> x20 <sup>3</sup> / <sub>4</sub> x12 <sup>1</sup> / <sub>8</sub>	359x527x307	5.0 2.3	—	<b>IWA-S11K3</b>
<b>L</b>	Lid Holder/Drying Shelf	8 <sup>1</sup> / <sub>4</sub> x13 <sup>1</sup> / <sub>2</sub> x4 <sup>1</sup> / <sub>2</sub>	210x343x114	2 0.9	—	<b>IWA-11K3</b>
<b>M</b>	Tray Drying Rack	14 <sup>9</sup> / <sub>16</sub> x46 <sup>1</sup> / <sub>4</sub> x10 <sup>3</sup> / <sub>16</sub>	371x1175x259	12.0 5.4	—	<b>TDR48K3</b>
<b>N</b>	6-Prong Bottle Holder	14 <sup>7</sup> / <sub>8</sub> x5 <sup>1</sup> / <sub>8</sub> x11	378x130x279	2.3 0.8	—	<b>BH6K3</b>

### Utensil Holders

		Width/Length/Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Plated	Cat. No. Metroseal 3
<b>O</b>	Large Utensil Holder	10 <sup>1</sup> / <sub>2</sub> x2x10 <sup>3</sup> / <sub>8</sub> x4	267x264x102	4 1.8	—	<b>IWA-12K3</b>
<b>P</b>	Small Utensil Holder	4 <sup>3</sup> / <sub>8</sub> x10 <sup>3</sup> / <sub>8</sub> x4	111x264x102	4 1.8	—	<b>IWA-14K3</b>
<b>Q</b>	Flatware/Instrument Cylinder	4 <sup>5</sup> / <sub>16</sub> x4 <sup>5</sup> / <sub>16</sub> x5 <sup>1</sup> / <sub>2</sub>	109x109x140	0.3 0.1	—	<b>FC1</b>
<b>R</b>	Cylinder Holder	2 <sup>5</sup> / <sub>8</sub> x5 <sup>7</sup> / <sub>8</sub> x5 <sup>3</sup> / <sub>4</sub>	67x149x146	1.0 0.5	—	<b>FCH</b>

### Miscellaneous Accessories

		Width/Length/Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Plated	Cat. No. Metroseal 3
<b>S</b>	Spice Rack/Utility Shelf	5 <sup>1</sup> / <sub>4</sub> x22 <sup>1</sup> / <sub>2</sub> x4	133x571x102	3.5 1.6	<b>SR24BR</b>	<b>SR24K3</b>
<b>T</b>	Insert Pan Holder	7 <sup>1</sup> / <sub>2</sub> x12 <sup>1</sup> / <sub>2</sub> x4	190x317x102	2.3 1.0	<b>STP3BR</b>	—
<b>U</b>	Hanging File Holder	6 <sup>1</sup> / <sub>4</sub> W.x12 <sup>1</sup> / <sub>2</sub> L.	159 W.x317 L.	3 1.4	<b>PBA-PFH</b>	—
<b>V</b>	Glove Box Holder (Vertical)	6 <sup>3</sup> / <sub>8</sub> W.x10 <sup>1</sup> / <sub>2</sub> H.	162 W.x267 H.	2 0.9	—	<b>GBHVK3</b>
		Inside Dimensions 5 <sup>7</sup> / <sub>8</sub> " W.x3 <sup>7</sup> / <sub>16</sub> " D. [267mm W.x87mm D.]				
<b>W</b>	Sticker Roll Holder	Overall Dimensions (Width/Length/Height): 5" x 18 <sup>1</sup> / <sub>2</sub> " x 3 <sup>3</sup> / <sub>4</sub> " (127 x 470 x 95mm)				<b>SRD18K3</b>
		<b>Note:</b> Tube dimension for holding rolls: 14 <sup>3</sup> / <sub>4</sub> " (375mm). Fits up to 6 <sup>1</sup> / <sub>4</sub> " (159mm) diameter roll.				

## Wall Mounts

An ideal method for storing items overhead or above work surfaces.

- Brackets accommodate all Super Erecta® sizes and types of shelves.
- Used double supports to mount adjacent shelves, single supports at ends.
- Metal caps to cover openings are provided.
- Available in chrome, Metroseal 3 or stainless steel.

## Post-Type Wall Mounts — {10.40}

### Standard Units

Post-type wall mounts are available in pre-packaged “End Units” and “Mid Units”; complete with all needed components except shelves, wall bolts or screws, which must be selected according to type of wall.

**A** “End Unit” consists of two posts with wall mounting brackets, and two single shelf supports for each shelf level.

**B** “Mid Unit” consists of one post with brackets and double support for each shelf.

Note: If shelving is to be the length of one shelf, order End Unit only.

If two-shelf lengths, order one End Unit and one Mid Unit; three lengths, one End and two Mid Units; four lengths, one End and three Mid Units; etc.

For 14" (355mm) Shelf Width

Shelf Levels	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. End Unit	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Mid Unit
1	7	3.2	SW21C	5	2.3	AW21C
2	14	6.4	SW23C	9	4.1	AW23C
3	22	10	SW25C	14	6.4	AW25C
4	28	12.7	SW26C	18	8.2	AW26C

For 18" (457mm) Shelf Width

Shelf Levels	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. End Unit	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Mid Unit
1	7	3.2	SW31C	5	2.3	AW31C
2	14	6.4	SW33C	11	5	AW33C
3	22	10	SW35C	17	8	AW35C
4	28	12.7	SW36C	21	9.5	AW36C

For 21" (530mm) Shelf Width

Shelf Levels	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. End Unit	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Mid Unit
1	8	3.6	SW41C	6	2.7	AW41C
2	16	7.3	SW43C	12	5.5	AW43C
3	25	11.3	SW45C	18	8.2	AW45C
4	32	14.4	SW46C	23	10.4	AW46C

For 24" (610mm) Shelf Width


Shelf Levels	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. End Unit	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Mid Unit
1	9	4.1	SW51C	6	2.7	AW51C
2	18	8.2	SW53C	12	5.5	AW53C
3	28	12.7	SW55C	19	9	AW55C
4	36	16	SW56C	24	10.9	AW56C

\*Note: User should determine that wall material and method of mounting are suitable to support the shelves and their contents. Mounting hardware not included.



Post-Type Wall Mount Installation  
\*Shelf supports are chrome-plated.

Post-Type Wall Mounts

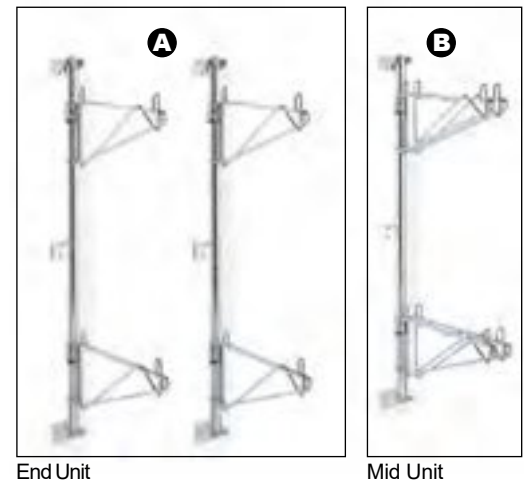

End Unit

Mid Unit

Maximum Load Rating: 250 lbs. (113kg) per shelf, not to exceed 250 lbs. (113kg) per unit.

### Metro Tip:

Have you looked at your walls lately? Unused wall space provides the perfect opportunity for a significant increase in storage capacity. Metro offers a complete line of wall shelving systems to maximize storage density.

See page 42 for Super Erecta shelves.




## Posts and Brackets — {10.40}

Two end brackets (BES) are supplied with each of these double-footed posts. One intermediate bracket (BCS) is supplied with 33PDF posts and two are supplied with 54PDF and 63PDF posts. Order desired number/style of shelf supports below.

Post Height (in.) (mm)	Description	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
13 <sup>7</sup> / <sub>8</sub> 350	Post for 1 tier	1 <sup>1</sup> / <sub>4</sub> 0.6	13PDF	13PDFK3	13PDFS
33 <sup>5</sup> / <sub>8</sub> 854	Post for 2 tiers	2 <sup>3</sup> / <sub>4</sub> 1.2	33PDF	33PDFK3	33PDFS
54 1370	Post for 3 or more tiers	5 2.3	54PDF	54PDFK3	54PDFS
62 1573	Post for 4 or more tiers	6 2.7	63PDF	63PDFK3	63PDFS
	End Bracket	1/2 0.2	BES	BESK3	SBES
	Intermediate Bracket	1/2 0.2	BCS	BCSK3	SBCS

**Note:** User should determine that wall material and method of mounting are suitable to support the shelves and their contents. Mounting hardware not included. Order shelves from page 42.

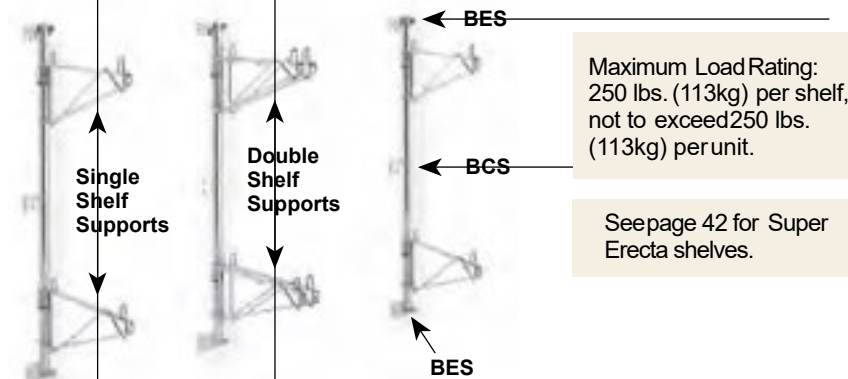

Typical configuration using two end units and one mid unit

Maximum Load Rating:  
250 lbs. (113kg) per shelf,  
not to exceed 250 lbs.  
(113kg) per unit.

See page 42 for Super Erecta shelves.

### Corner Adapters for MetroMax i shelving

Use when joining MetroMax i shelves with wire shelf supports. Box of 4. Use one box per shelf. Cat. No. M9997-4

### Corner Adapters for MetroMax 4 shelving

Use when joining MetroMax 4 shelves with wire shelf supports. Box of 4. Use one box per shelf. Cat. No. MAX4-9997-4

### Metro Tip:

MetroMax Q, MetroMax 4, and MetroMax i shelves can be used with Super Erecta Post Mounting Shelf Supports and Direct Wall Mounts.

## Shelf Supports — Post Mounting — {10.40}

Single — Two required per shelf (one at each end.)

Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
14 355	2 0.9	1WS14C	1WS14K3	1WS14S
18 457	2 0.9	1WS18C	1WS18K3	1WS18S
21 530	2 <sup>1</sup> / <sub>2</sub> 1.1	1WS21C		1WS21S
24 610	3 1.4	1WS24C	1WS24K3	1WS24S

Double — For run of multiple shelves.

Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
14 355	3 1.4	2WS14C	2WS14K3	2WS14S
18 457	3 <sup>3</sup> / <sub>4</sub> 1.7	2WS18C	2WS18K3	2WS18S
21 530	4 <sup>1</sup> / <sub>4</sub> 1.9	2WS21C		2WS21S
24 610	4 <sup>1</sup> / <sub>2</sub> 2.0	2WS24C	2WS24K3	2WS24S

Order shelves from page 42.

## Direct Wall Mounts — {10.40}

Each consists of one shelf support and mounting plate, with two shelf collar caps. Use single support at shelf ends; double support for adjoining shelves.

Single — Two required per shelf.

Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
14 355	1 <sup>1</sup> / <sub>2</sub> 0.7	1WD14C	1WD14K3	1WD14S
18 457	2 0.9	1WD18C	1WD18K3	1WD18S
21 530	2 0.9	1WD21C	1WD21K3	1WD21S
24 610	2 <sup>1</sup> / <sub>4</sub> 1.0	1WD24C	1WD24K3	1WD24S

Double

Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
14 355	3 1.4	2WD14C	2WD14K3	2WD14S
18 457	3 1.4	2WD18C	2WD18K3	2WD18S
21 530	4 1.8	2WD21C	2WD21K3	2WD21S
24 610	4 <sup>1</sup> / <sub>2</sub> 2.0	2WD24C	2WD24K3	2WD24S

**Note:** User should determine that wall material and method of mounting are suitable to support the shelves and their contents.



Single Shelf Support

Double Shelf Support

## Hole Plugs — {10.06}

This chrome-plated cover is used to fill shelf-corner openings. Use wherever posts have been eliminated by "S" hooks.

Cat. No. 9997C

✓ Indicates antimicrobial product.

**NSF** Note: Wall shelving is NSF listed.



Wall Mount Brackets shown with MetroMax i Open Frame and Drop-In Basket.

### Direct Wall Mount Shelving — {9.20}

Use standard Super Erecta stainless steel direct wall mount shelf supports with MetroMax shelves or open frames with wire drop in baskets. Order one MetroMax corner adapter kit with each shelf or shelf frame. Shelf supports are sold individually.

Single — Use at shelf ends; two are required for a stand-alone shelf.

Shelf Width (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Stainless Steel
18	457	2	0.9	1WD18S
24	610	2 1/4	1.0	1WD24S

Double — When constructing a run of shelves, use double shelf supports to join adjacent shelves.

Shelf Width (in.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No. Stainless Steel
18	457	3	1.4	2WD18S
24	610	4 1/4	2.0	2WD24S

For MetroMax i Open Frame and Drop-In Basket, see page 27.

#### Corner Adapters for MetroMax i shelving

Use when joining MetroMax i shelves with wire shelf supports. Box of 4. Use one box per shelf. Cat. No. M9997-4

#### Corner Adapters for MetroMax 4 shelving

Use when joining MetroMax 4 shelves with wire shelf supports. Box of 4. Use one box per shelf. Cat. No. MAX4-9997-4



Wall Mounts with Shelf  
(Shelf sold separately, see page 77)

### Erecta Shelf® Wall Mounts — {10.56}

Used to create wall-mounted shelving units with 12" (305mm) or 18" (457mm) Erecta shelves of any length.

- Models are available to accommodate from one to five shelves. (Each mount consists of two shelf supports and mounting brackets.)
- Wall bolts or screws not included; they must be selected according to type of wall.
- Order shelves from page 77.

Width (in.)	(mm)	Height (in.)	(mm)	Capacity	Approx. Pkd. Wt. (Pr.) (lbs.) (kg)	Cat. No. Chrome
12	305	10 3/4	273	1 Shelf	2 1/2 1.1	12WB1C
12	305	20 13/16	528	1 to 3 Shelves	5 2.3	12WB3C
12	305	30 13/16	782	1 to 5 Shelves	7 1/4 3.2	12WB5C
18	457	11 3/4	298	1 Shelf	3 1.4	18WB1C
18	457	21 5/8	548	1 to 3 Shelves	6 2.7	18WB3C
18	457	31 5/8	807	1 to 5 Shelves	8 1/2 3.8	18WB5C

For additional mounting brackets (single) order Cat. No. 9975C

Double mounting brackets are also available for use where continuous wall shelving is to be installed. Cat. No. 9976C

Load Rating: 200 lbs. (91kg) per shelf, not to exceed 200 lbs. (91kg) per unit.

Units must be secured to sufficient wall support structure.

### Erecta Shelf® Wall Kit — {10.56}

Kit includes two shelves, shelf supports, and mounting brackets. Wall bolts and screws not included; they must be selected according to type of wall. Chrome.

Shelf Length (in.)	(mm)	Overall Length (in.)	(mm)	Shelf Width (in.)	(mm)	Overall Width (in.)	(mm)	Overall Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
24	610	26 1/4	673	12	305	13	330	21	530	18 1/2 8.3	12WS12C
36	914	38 1/4	971	12	305	13	330	21	530	25 1/4 11.3	12WS32C
48	1219	50 1/4	1283	12	305	13	330	21	530	32 14.4	12WS52C

Kit packaged in one box and UPS shippable.

Load Rating: 200 lbs. (91kg) per shelf, not to exceed 200 lbs. (91kg) per unit.

Units must be secured to sufficient wall support structure.



12WS12C  
Erecta Shelf® Wall Kit

# By your side until the job is done.



SUPPORTS GOOD  
HACCP

\*Patent Pending.



## Versatile.

Prepare raw meats like chicken, pork, beef or seafood. Create an efficient versatile workspace using standard steam table and food pans.

## Efficient.

From farm to table, chop, dice & slice through vegetables with the highest efficiency. Utilize the PrepMate rail system with stock below on one side and push prepped food directly into waiting pans on the other.

20%  
INCREASE

\* Penn State University Center  
for Food Innovation testing.

PRODUCTIVITY



*qwikSet  
easy height  
adjustment  
option.*



## qwikSet.

Click. Click. Set.  
Being comfortable is  
really that simple.

Go with **NEW** qwikSet— The ultimate work surface adjustment feature. Just depress the orange tab to raise or lower the work surface height for your ideal ergonomic prep position.





PrepMate Original Part #	PrepMate QwikSet Part #	Width/Length	Shelf Size	Top Shelf	Bottom Shelf
MS1824-FGFG	MSQ1824-FGFG	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	Solid Galvanized	Solid Galvanized
MS1824-FGBR	MSQ1824-FGBR	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	Solid Galvanized	Brite Zinc Wire
MS1824-FSFS	MSQ1824-FSFS	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	Solid Stainless Steel	Solid Stainless Steel
MS1824-FSNK	-	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	Solid Stainless Steel	MetroSeal 3 Epoxy Wire
MS1824-BRBR	-	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	Brite Zinc Wire	Brite Zinc Wire
MS1824-PRPR	-	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	SuperErecta Pro Hybrid Mat	SuperErecta Pro Hybrid Mat
MS1824-FSPR	-	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	Solid Stainless Steel	SuperErecta Pro Hybrid Mat
MS1824-NKNK	-	19.4"x26" (493mm x 660mm)	18"x24" (457mm x 610mm)	MetroSeal 3 Epoxy Wire	MetroSeal 3 Epoxy Wire
MS1830-FGFG	MSQ1830-FGFG	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	Solid Galvanized	Solid Galvanized
MS1830-FGBR	MSQ1830-FGBR	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	Solid Galvanized	Brite Zinc Wire
MS1830-FSFS	MSQ1830-FSFS	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	Solid Stainless Steel	Solid Stainless Steel
MS1830-FSNK	-	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	Solid Stainless Steel	MetroSeal 3 Epoxy Wire
MS1830-BRBR	-	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	Brite Zinc Wire	Brite Zinc Wire
MS1830-PRPR	-	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	SuperErecta Pro Hybrid Mat	SuperErecta Pro Hybrid Mat
MS1830-FSPR	-	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	Solid Stainless Steel	SuperErecta Pro Hybrid Mat
MS1830-NKNK	-	19.4"x32" (493mm x 812mm)	18"x30" (457mm x 762mm)	MetroSeal 3 Epoxy Wire	MetroSeal 3 Epoxy Wire
MS1836-FGFG	MSQ1836-FGFG	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	Solid Galvanized	Solid Galvanized
MS1836-FGBR	MSQ1836-FGBR	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	Solid Galvanized	Brite Zinc Wire
MS1836-FSFS	MSQ1836-FSFS	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	Solid Stainless Steel	Solid Stainless Steel
MS1836-FSNK	-	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	Solid Stainless Steel	MetroSeal 3 Epoxy Wire
MS1836-BRBR	-	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	Brite Zinc Wire	Brite Zinc Wire
MS1836-PRPR	-	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	SuperErecta Pro Hybrid Mat	SuperErecta Pro Hybrid Mat
MS1836-FSPR	-	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	Solid Stainless Steel	SuperErecta Pro Hybrid Mat
MS1836-NKNK	-	19.4"x38" (493mm x 914mm)	18"x36" (457mm x 914mm)	MetroSeal 3 Epoxy Wire	MetroSeal 3 Epoxy Wire
MS1848-FGFG	MSQ1848-FGFG	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	Solid Galvanized	Solid Galvanized
MS1848-FGBR	MSQ1848-FGBR	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	Solid Galvanized	Brite Zinc Wire
MS1848-FSFS	MSQ1848-FSFS	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	Solid Stainless Steel	Solid Stainless Steel
MS1848-FSNK	-	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	Solid Stainless Steel	MetroSeal 3 Epoxy Wire
MS1848-BRBR	-	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	Brite Zinc Wire	Brite Zinc Wire
MS1848-PRPR	-	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	SuperErecta Pro Hybrid Mat	SuperErecta Pro Hybrid Mat
MS1848-FSPR	-	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	Solid Stainless Steel	SuperErecta Pro Hybrid Mat
MS1848-NKNK	-	19.4"x50" (493mm x 1270mm)	18"x48" (457mm x 1219mm)	MetroSeal 3 Epoxy Wire	MetroSeal 3 Epoxy Wire

## PrepMate **qwikSet** Easy Order Kits with Accessories



Part #	Shelf Types
<b>MSQ1830-FSFS-PK2</b>	Stainless / Stainless
<b>MSQ1836-FSFS-PK2</b>	Stainless / Stainless
<b>MSQ1848-FSFS-PK2</b>	Stainless / Stainless

Includes: (2) Magic Rings, (1) 18"x24" White HDPE Cutting Board, Cutting Board Holder, Pan Holder, Knife Holder



Part #	Shelf Types
<b>MSQ1830-FGFG-PK2</b>	Galvanized / Galvanized
<b>MSQ1836-FGFG-PK2</b>	Galvanized / Galvanized
<b>MSQ1848-FGFG-PK2</b>	Galvanized / Galvanized

Includes: (2) Magic Rings, (1) 18"x24" White HDPE Cutting Board, Cutting Board Holder, Pan Holder, Knife Holder



Part #	Shelf Types
<b>MSQ1830-FGBR-PK2</b>	Galvanized / Brite
<b>MSQ1836-FGBR-PK2</b>	Galvanized / Brite
<b>MSQ1848-FGBR-PK2</b>	Galvanized / Brite

Includes: (2) Magic Rings, (1) 18"x24" White HDPE Cutting Board, Cutting Board Holder, Pan Holder, Knife Holder



Knife Holder



Cutting Board Holder



18" Utensil Bar



Magic Ring



Pan Holder



Sanitation Bucket Holder


## PrepMate Accessories & Kits

Part #	Description	Size
<b>MS-CBH</b>	Cutting Board Holder	18.75"x19.25"x5" (476mm x 489mm x 127mm)
<b>MS-CB1824-W</b>	Cutting Board	18"x24" (457mm x 610mm x 12.7mm)
<b>MS-RING</b>	Magic Ring	7"x13" (178mm x 330mm)
<b>MS-CSBH</b>	Sanitation Bucket Holder	7"x13" (178mm x 330mm)
<b>MS-SPH</b>	Pan Holder	19"x22.5"x16" (483mm x 572mm x 406mm)
<b>MS-KNIFE</b>	Encased Knife Holder	2"x10"x12" (51mm x 254mm x 305mm)
<b>MS-UB</b>	18" Utensil Bar	3"x18" (76mm x 457mm)
<b>5PTL-NB</b>	5" Total Lock Caster	5" (127mm)

\* Note: Not compatible with 18"x24" units.



# Nothing gets in the way of productivity.

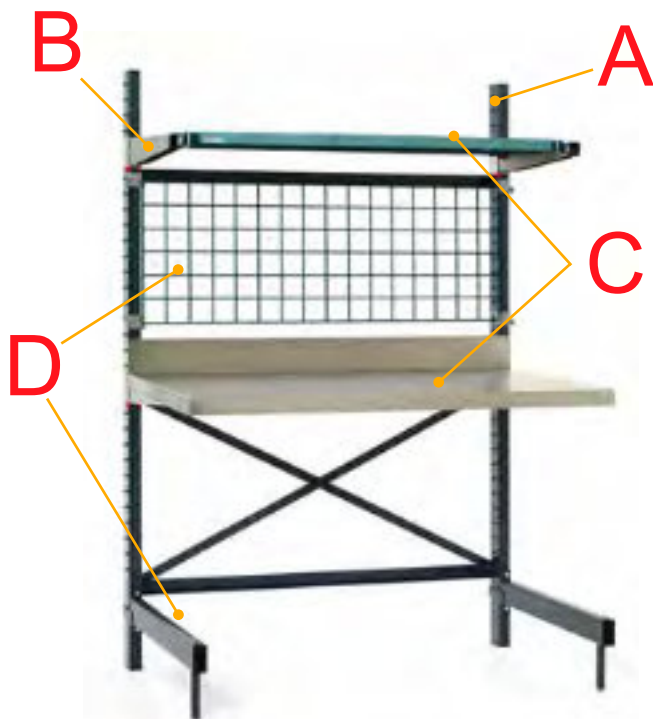

## Building SmartLever is as easy as ABCD.

- A:** Select Starter kit
- B:** Select arm pairs to match desired shelf or work surface
- C:** Select compatible shelving or work surface to meet your application needs.
- D:** Add accessories or SmartWall grid to fit application.



### SmartLever™ Multifunctional Storage & Workstations — {17.30}

Create the ultimate usable space by combining shelving, stainless work surface, and smartwall productivity system.

#### Specifications

- Structure: Heavy gauge cold rolled steel electroplated and epoxy coated with stainless steel hardware.
- Work Surface: 16 gauge, type 304 stainless steel top with Duraplast anti-drumming support.
- Support Arms: 11 gauge stainless steel coated with epoxy.
- Dunnage: heavy gauge steel electroplated and epoxy coated
- Work surface and shelving height adjustable on 2" increments.
- Warranty: 10 year limited warranty against surface rust formation.
- Load Capacity:
  - The total weight load capacity of each model including the bottom shelf, is 2,800 lbs. (1271kg).
  - Each level (work surface or shelf) has a maximum evenly distributed weight load capacity of 600 lbs. (272kg).
  - The maximum uniformly distributed load on the Dunnage rack must not exceed 1,000 lbs. (454kg).




**Utilizes Metro Shelving**  
including but not limited to:  
Super Erecta,  
Super Erecta Pro,  
SmartWall Grid and accessories, and Flat Stainless Shelves.

## SmartLever Starter and Add-On Kits — {17.30}

- Starter kit includes, two uprights, two legs, two crossbraces, two crossbars
- Add-on kit includes, one upright, one leg, two crossbraces and two crossbars

SmartLever Starter Kit	Assembled Unit H x W x L (in.)			Shelving Size L x W (in.)	
SM761824-KIT	22.5	28.25	76.375	18	24
SM761830-KIT	22.5	34.25	76.375	18	30
SM761836-KIT	22.5	40.25	76.375	18	36
SM761842-KIT	22.5	46.25	76.375	18	42
SM761848-KIT	22.5	52.25	76.375	18	48
SM761854-KIT	22.5	58.25	76.375	18	54
SM761860-KIT	22.5	64.25	76.375	18	60
SM761872-KIT	22.5	70.25	76.375	18	72
SM762124-KIT	25.5	28.25	76.375	21	24
SM762130-KIT	25.5	34.25	76.375	21	30
SM762136-KIT	25.5	40.25	76.375	21	36
SM762142-KIT	25.5	46.25	76.375	21	42
SM762148-KIT	25.5	52.25	76.375	21	48
SM762154-KIT	25.5	58.25	76.375	21	54
SM762160-KIT	25.5	64.25	76.375	21	60
SM762172-KIT	25.5	70.25	76.375	21	72
SM762424-KIT	28.5	28.25	76.375	24	24
SM762430-KIT	28.5	34.25	76.375	24	30
SM762436-KIT	28.5	40.25	76.375	24	36
SM762442-KIT	28.5	46.25	76.375	24	42
SM762448-KIT	28.5	52.25	76.375	24	48
SM762454-KIT	28.5	58.25	76.375	24	54
SM762460-KIT	28.5	64.25	76.375	24	60
SM762472-KIT	28.5	70.25	76.375	24	72
SM763024-KIT	34.5	28.25	76.375	30	24
SM763030-KIT	34.5	34.25	76.375	30	30
SM763036-KIT	34.5	40.25	76.375	30	36
SM763042-KIT	34.5	46.25	76.375	30	42
SM763048-KIT	34.5	52.25	76.375	30	48
SM763054-KIT	34.5	58.25	76.375	30	54
SM763060-KIT	34.5	64.25	76.375	30	60
SM763072-KIT	34.5	70.25	76.375	30	72
SM861824-KIT	22.5	28.25	86.375	18	24
SM861830-KIT	22.5	34.25	86.375	18	30
SM861836-KIT	22.5	40.25	86.375	18	36
SM861842-KIT	22.5	46.25	86.375	18	42
SM861848-KIT	22.5	52.25	86.375	18	48
SM861854-KIT	22.5	58.25	86.375	18	54
SM861860-KIT	22.5	64.25	86.375	18	60
SM861872-KIT	22.5	70.25	86.375	18	72
SM862124-KIT	25.5	28.25	86.375	21	24
SM862130-KIT	25.5	34.25	86.375	21	30
SM862136-KIT	25.5	40.25	86.375	21	36
SM862142-KIT	25.5	46.25	86.375	21	42
SM862148-KIT	25.5	52.25	86.375	21	48
SM862154-KIT	25.5	58.25	86.375	21	54
SM862160-KIT	25.5	64.25	86.375	21	60
SM862172-KIT	25.5	70.25	86.375	21	72
SM862424-KIT	28.5	28.25	86.375	24	24
SM862430-KIT	28.5	34.25	86.375	24	30
SM862436-KIT	28.5	40.25	86.375	24	36
SM862442-KIT	28.5	46.25	86.375	24	42
SM862448-KIT	28.5	52.25	86.375	24	48
SM862454-KIT	28.5	58.25	86.375	24	54
SM862460-KIT	28.5	64.25	86.375	24	60
SM862472-KIT	28.5	70.25	86.375	24	72
SM863024-KIT	34.5	28.25	86.375	30	24
SM863030-KIT	34.5	34.25	86.375	30	30
SM863036-KIT	34.5	40.25	86.375	30	36
SM863042-KIT	34.5	46.25	86.375	30	42
SM863048-KIT	34.5	52.25	86.375	30	48
SM863054-KIT	34.5	58.25	86.375	30	54
SM863060-KIT	34.5	64.25	86.375	30	60
SM863072-KIT	34.5	70.25	86.375	30	72


SmartLever Add-On Kit	Assembled Unit H x W x L (in.)			Shelving Size L x W (in.)	
SM761824-ADD	22.5	26.1875	76.375	18	24
SM761830-ADD	22.5	32.1875	76.375	18	30
SM761836-ADD	22.5	38.1875	76.375	18	36
SM761842-ADD	22.5	44.1875	76.375	18	42
SM761848-ADD	22.5	50.1875	76.375	18	48
SM761854-ADD	22.5	56.1875	76.375	18	54
SM761860-ADD	22.5	62.1875	76.375	18	60
SM761872-ADD	22.5	74.1875	76.375	18	72
SM762124-ADD	25.5	26.1875	76.375	21	24
SM762130-ADD	25.5	32.1875	76.375	21	30
SM762136-ADD	25.5	38.1875	76.375	21	36
SM762142-ADD	25.5	44.1875	76.375	21	42
SM762148-ADD	25.5	50.1875	76.375	21	48
SM762154-ADD	25.5	56.1875	76.375	21	54
SM762160-ADD	25.5	62.1875	76.375	21	60
SM762172-ADD	25.5	74.1875	76.375	21	72
SM762424-ADD	28.5	26.1875	76.375	24	24
SM762430-ADD	28.5	32.1875	76.375	24	30
SM762436-ADD	28.5	38.1875	76.375	24	36
SM762442-ADD	28.5	44.1875	76.375	24	42
SM762448-ADD	28.5	50.1875	76.375	24	48
SM762454-ADD	28.5	56.1875	76.375	24	54
SM762460-ADD	28.5	62.1875	76.375	24	60
SM762472-ADD	28.5	74.1875	76.375	24	72
SM763024-ADD	34.5	26.1875	76.375	30	24
SM763030-ADD	34.5	32.1875	76.375	30	30
SM763036-ADD	34.5	38.1875	76.375	30	36
SM763042-ADD	34.5	44.1875	76.375	30	42
SM763048-ADD	34.5	50.1875	76.375	30	48
SM763054-ADD	34.5	56.1875	76.375	30	54
SM763060-ADD	34.5	62.1875	76.375	30	60
SM763072-ADD	34.5	74.1875	76.375	30	72
SM861824-ADD	22.5	26.1875	86.375	18	24
SM861830-ADD	22.5	32.1875	86.375	18	30
SM861836-ADD	22.5	38.1875	86.375	18	36
SM861842-ADD	22.5	44.1875	86.375	18	42
SM861848-ADD	22.5	50.1875	86.375	18	48
SM861854-ADD	22.5	56.1875	86.375	18	54
SM861860-ADD	22.5	62.1875	86.375	18	60
SM861872-ADD	22.5	74.1875	86.375	18	72
SM862124-ADD	25.5	26.1875	86.375	21	24
SM862130-ADD	25.5	32.1875	86.375	21	30
SM862136-ADD	25.5	38.1875	86.375	21	36
SM862142-ADD	25.5	44.1875	86.375	21	42
SM862148-ADD	25.5	50.1875	86.375	21	48
SM862154-ADD	25.5	56.1875	86.375	21	54
SM862160-ADD	25.5	62.1875	86.375	21	60
SM862172-ADD	25.5	74.1875	86.375	21	72
SM862424-ADD	28.5	26.1875	86.375	24	24
SM862430-ADD	28.5	32.1875	86.375	24	30
SM862436-ADD	28.5	38.1875	86.375	24	36
SM862442-ADD	28.5	44.1875	86.375	24	42
SM862448-ADD	28.5	50.1875	86.375	24	48
SM862454-ADD	28.5	56.1875	86.375	24	54
SM862460-ADD	28.5	62.1875	86.375	24	60
SM862472-ADD	28.5	74.1875	86.375	24	72
SM863024-ADD	34.5	26.1875	86.375	30	24
SM863030-ADD	34.5	32.1875	86.375	30	30
SM863036-ADD	34.5	38.1875	86.375	30	36
SM863042-ADD	34.5	44.1875	86.375	30	42
SM863048-ADD	34.5	50.1875	86.375	30	48
SM863054-ADD	34.5	56.1875	86.375	30	54
SM863060-ADD	34.5	62.1875	86.375	30	60
SM863072-ADD	34.5	74.1875	86.375	30	72

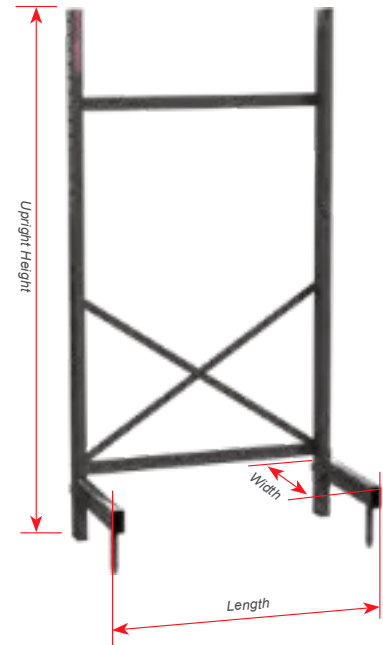

### SmartLever Arms

with new ArmKeepers.

Easy to install and a snap to adjust.

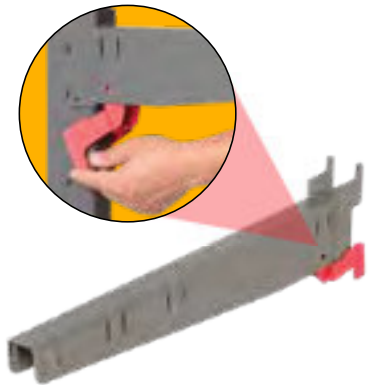

### Arms

(Includes (4) shelf mount hooks & (4) locking wedges)

Length	Arms Starter Kit
18	SMA18A
21	SMA21A
24	SMA24A
30	SMA30A

Length	Arm Add-On
18	SMA18A-ADD
21	SMA21A-ADD
24	SMA24A-ADD
30	SMA30A-ADD



## Compatible Shelves

Shelving Size L x W (in.)	Super Erecta Pro	Super Erecta Solid Stainless	Super Erecta MetroSeal 3	Super Erecta Super Brite	Super Erecta Chrome	Super Erecta Stainless	Super Erecta MetroSeal 3 Dunnage
14 24	-	1424FS	1424NK3	1424BR	1424NC	1424NS	-
14 30	-	1430FS	1430NK3	1430BR	1430NC	1430NS	-
14 36	-	1436FS	1436NK3	1436BR	1436NC	1436NS	-
14 42	-	1442FS	1442NK3	1442BR	1442NC	1442NS	-
14 48	-	1448FS	1448NK3	1448BR	1448NC	1448NS	-
14 54	-	-	1454NK3	1454BR	1454NC	1454NS	-
14 60	-	1460FS	1460NK3	1460BR	1460NC	1460NS	-
14 72	-	-	1472NK3	1472BR	1472NC	1472NS	-
18 24	PR1824NK3	1824FS	1824NK3	1824BR	1824NC	1824NS	1824DRK3
18 30	PR1830NK3	1830FS	1830NK3	1830BR	1830NC	1830NS	1830DRK3
18 36	PR1836NK3	1836FS	1836NK3	1836BR	1836NC	1836NS	1836DRK3
18 42	PR1842NK3	1842FS	1842NK3	1842BR	1842NC	1842NS	1842DRK3
18 48	PR1848NK3	1848FS	1848NK3	1848BR	1848NC	1848NS	1848DRK3
18 54	PR1854NK3	-	1854NK3	1854BR	1854NC	1854NS	1854DRK3
18 60	PR1860NK3	1860FS	1860NK3	1860BR	1860NC	1860NS	1860DRK3
18 72	PR1872NK3	1872FS	1872NK3	1872BR	1872NC	1872NS	-
21 24	PR2124NK3	2124FS	2124NK3	2124BR	2124NC	2124NS	2124DRK3
21 30	PR2130NK3	2130FS	2130NK3	2130BR	2130NC	2130NS	2130DRK3
21 36	PR2136NK3	2136FS	2136NK3	2136BR	2136NC	2136NS	2136DRK3
21 42	PR2142NK3	2142FS	2142NK3	2142BR	2142NC	2142NS	2142DRK3
21 48	PR2148NK3	2148FS	2148NK3	2148BR	2148NC	2148NS	2148DRK3
21 54	PR2154NK3	-	2154NK3	2154BR	2154NC	2154NS	2154DRK3
21 60	PR2160NK3	2160FS	2160NK3	2160BR	2160NC	2160NS	2160DRK3
21 72	PR2172NK3	-	2172NK3	2172BR	2172NC	2172NS	-
24 24	PR2424NK3	2424FS	2424NK3	2424BR	2424NC	2424NS	2424DRK3
24 30	PR2430NK3	2430FS	2430NK3	2430BR	2430NC	2430NS	2430DRK3
24 36	PR2436NK3	2436FS	2436NK3	2436BR	2436NC	2436NS	2436DRK3
24 42	PR2442NK3	2442FS	2442NK3	2442BR	2442NC	2442NS	2442DRK3
24 48	PR2448NK3	2448FS	2448NK3	2448BR	2448NC	2448NS	2448DRK3
24 54	PR2454NK3	-	2454NK3	2454BR	2454NC	2454NS	2454DRK3
24 60	PR2460NK3	2460FS	2460NK3	2460BR	2460NC	2460NS	2460DRK3
24 72	PR2472NK3	2472FS	2472NK3	2472BR	2472NC	2472NS	-
30 36	-	-	3036NK3	-	3036NC	3036NS	-
30 42	-	-	3042NK3	-	3042NC	-	-
30 48	-	-	3048NK3	-	3048NC	3048NS	-
30 54	-	-	3054NK3	-	3054NC	-	-
30 60	-	-	3060NK3	-	3060NC	3060NS	-
30 72	-	-	3072NK3	-	3072NC	3072NS	-

\*Arm size must match shelf depth. For example, 2148NK3 shelf will use SMA21A.

## Worksurfaces

Cat. No.	Description	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)
<b>SMW36</b>	SmartLever 30x36 SS Work Surface	33.6	15.3
<b>SMW42</b>	SmartLever 30x42 SS Work Surface	38.3	17.5
<b>SMW48</b>	SmartLever 30x48 SS Work Surface	42.9	19.5
<b>SMW54</b>	SmartLever 30x54 SS Work Surface	47.6	21.3
<b>SMW60</b>	SmartLever 30x60 SS Work Surface	52.2	23.8
<b>SMW72</b>	SmartLever 30x72 SS Work Surface	61.4	28

\*Work surfaces need Shelf and Arms, which must be ordered separately.

## Accessory Grids



Grids	Plated	MetroSeal 3
18x36	<b>WG1836BR</b>	<b>WG1836K3</b>
18x42	-	<b>WG1842K3</b>
18x48	<b>WG1848BR</b>	<b>WG1848K3</b>
18x54	-	<b>WG1854K3</b>
18x60	<b>WG1860BR</b>	<b>WG1860K3</b>
18x72	-	<b>WG1872K3</b>

Note: See page 87 for grid accessories.


## Grid Bracket

Cat. No.	Description
<b>SMR*</b>	SmartLever Grid Bracket (4 pack)

\*must be purchased if ordering a grid.



SMR

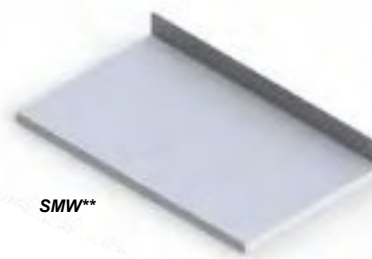

SMW\*\*

## Leg Hooks

Cat. No.	Description
<b>LSH1</b>	Single Leg Hook (4 Pack)
<b>LSH2</b>	Double Leg Hook (2 Pack)

Note: LSH1 and LSH2 hooks are used to allow a standard SES shelf instead of the Dunnage shelf. This reduces the load capacity



LSH1

LSH2

1. Arm size must match shelf depth. For example 2148NK3 shelf will use SMA21A or SMA21A-ADD.
2. Arms/Shelves must be less than or equal to the length of the leg.
3. Shared arms need to be at the same level.
4. Work surfaces need Shelf and arms, which must be ordered separately. For example a SMW36 requires One (1) SMA30 and (1) 30x36 wire shelf (3036BR or 3036NK3)
5. SMR (4 wall grid hooks) must be ordered along with a wall grid. They are required for mounting the wall grid to SmartLever unit. Refer Spec Sheets 10.42 & 10.43 for SmartWall system.



## Replacement Endcap

Bag of 2  
Cat. No. RPC06-1211

## Replacement Locking Wedge

Bag of 4  
Cat. No. RPSMLW

## Replacement Hole Plugs

Bag of 10  
Cat. No. RPSMHP



## Replacement Shelf Mount Hook

Bag of 4  
Cat. No. SMS

## Replacement Hardware Bag Cross Bar & Cross Brace

Cat. No. RPHDWE-SMB

## Replacement Bag for Arms

Cat. No. RPARM-HDWEBAG

# Be smarter with your space.



**Metro Breakfast Cart**

- Includes eye-catching two-sided sign
- Type 304 stainless steel top for easy cleaning
- Bonus wire center shelf adjusts at 1" increments to accommodate your changing breakfast offerings
- Comes with four 5" swivel stem casters all with brakes for easy rolling and secure positioning



*Comes with a two-sided sign.*

Description	Height		Approx. Pkd. Wt.		Cat. No.
	(in.)	(mm)	(lb.)	(kg)	
24x36 Stainless steel top with adjustable middle shelf	70	1178	67.9	25.3	GG2436
24x48 Stainless steel top with adjustable middle shelf	70	1178	83.1	31	GG2448
24x60 Stainless steel top with adjustable middle shelf	70	1178	94	35	GG2460

**Note:** Comes with 2-sided sign.



# Why is it smart to pick a SmartStation?

- Fully modular components & accessories
- Value-bundled for simplicity
- Pre-optimized for space savings and workflow efficiency.

## Super Erecta® Prep Station

- Perfect for multi-functional spaces.
- Access items easy with the SmartWall system.
- Unit Includes 18" x 48" (457x1219mm) SmartWall Grid, (1) Hanger Rails, Accessory Pack, 14" x 48" (356x1219mm) Upper Shelf, 14" x 48" (356x1219mm) Stainless Steel Intermediate Shelf, 24" x 48" (102x1219mm) Stainless Worksurface, 24" x 48" (102x1219mm) Lower Shelf, 3-Sided Snake Frame, (2) 27" (686mm) Upper Posts, (2) 33" (838mm) Lower posts, (2) 63" (1600mm) High Back Posts



Description	Approx. Pkd. Wt. (lb) (kg)		Cat. No.
24x48 Super Erecta Prep Station	86.5	39.2	<b>SMSP2448NK3</b>

## SmartWall® & Super Erecta® Prep Station with Undercounter Mobile Prep Cart

- Easy-mount wall track makes set-up a snap.
- Access items easy with the SmartWall system.
- Wall unit holds up to 250 lbs. (113kg)
- Wall Unit Includes: 40" Wall Track, (2) Shelf Supports, 18" x 36" (457x915mm) Wire Shelf, (2) Hanger Rails, 18" x 36" (457x915mm) Accessory Grid, Accessory Pack
- Base Unit Includes: 24" x 36" (102x914) Stainless Steel Worksurface, (1) 3-Sided Frames, (4) 25" (584mm) Mobile Posts, (4) 33" (838mm) Base Unit Posts, (2) 18" x 30" (457x762mm) Wire Shelves, 18" x 30" (457x762mm) Stainless Steel Worksurface, (4) Casters (2-swivel/2 Brake)



Description	Approx. Pkd. Wt. (lb) (kg)		Cat. No.
24x36 SmartWall Prep Station w/ Undercounter Utility	116.7	52.9	<b>SMSPM2436</b>

## Easy to Assemble.

Units can be put together in minutes without the use of special tools. Bottom shelf or frame is adjustable in 1" increments.

**NEW**  
**SPACE SAVER**  
**WORKTABLES** **24"**  
**DEEP**

## Strong & Robust.

### Space Saver Worktables — {17.40}

Sturdy construction provides a robust 800 lb. load rating. Mobile tables are rated to 600 lbs. Type 304 Stainless Steel components. 1" (25mm) diameter posts and patented Super Erecta Shelf construction. Heavy-duty 14-gauge stainless steel virtually eliminates "drumming."

Preconfigured units are offered both in stationary with a leveling foot and mobile utilizing a 5" polymer corrosion resistant caster. Worktables can also be customized using Super Erecta® components in any finish to fit your application.



### Stationary Space Saver Worktables 24" Deep (610mm)



Description	Length		Approx. Pkd. Wt.		Cat. No.
	(in.)	(mm)	(lb.)	(kg)	
24x36 SS Worktable, Stationary with Solid Shelf	36	914	64	29	<b>WTS2436FS</b>
24x48 SS Worktable, Stationary with Solid Shelf	48	1219	81	37	<b>WTS2448FS</b>
24x60 SS Worktable, Stationary with Solid Shelf	60	1524	93	42	<b>WTS2460FS</b>
24x36 SS Worktable, Stationary with 3-Sided Frame	36	914	53	24	<b>WTS2436US</b>
24x48 SS Worktable, Stationary with 3-Sided Frame	48	1219	65	29	<b>WTS2448US</b>
24x60 SS Worktable, Stationary with 3-Sided Frame	60	1524	75	34	<b>WTS2460US</b>

### Mobile Space Saver Worktables 24" Deep (610mm)



Description	Length		Approx. Pkd. Wt.		Cat. No.
	(in.)	(mm)	(lb.)	(kg)	
24x36 SS Worktable, Mobile with Solid Shelf	36	914	64	29	<b>MWTS2436FS</b>
24x48 SS Worktable, Mobile with Solid Shelf	48	1219	82	37	<b>MWTS2448FS</b>
24x60 SS Worktable, Mobile with Solid Shelf	60	1524	94	43	<b>MWTS2460FS</b>
24x36 SS Worktable, Mobile with 3-Sided Frame	36	914	53	25	<b>MWTS2436US</b>
24x48 SS Worktable, Mobile with 3-Sided Frame	48	1219	66	30	<b>MWTS2448US</b>
24x60 SS Worktable, Mobile with 3-Sided Frame	60	1524	76	35	<b>MWTS2460US</b>

## Stainless Worktables — {52.03}

- Corrosion-proof performance — stainless steel construction throughout.
- Easily cleaned smooth surfaces. Mobile units can be easily moved to clean behind table area.
- Available top materials include Type 304 stainless and TRESPA Phenolic resin (black or gray). Refer to chart below for more information.
- Choose from a wide range of accessories and caster options (pages 100-101) to customize table.

Countertop Application Matrix			Characteristics	Phenolic Resin	Stainless Steel
Use Area	Phenolic Resin	Stainless Steel			
Low chemical use			Heat Resistance	Fair*	Excellent
Moderate chemical use	X		Abrasion Resistance	Excellent	Good
High chemical use	X	X	Impact Resistance	Excellent	Good
			Strength	Excellent	Good
			Stain Resistance	Good	Good

\*Discolor with high heat

Note: Phenolic resin and stainless are offered as top options for this table system.

### Definitions:

**Phenolic resin:** Compression molded of organic fiber-reinforced phenolic core with an integrally cured thermoset resin surface. Stronger than Epoxy resin over a span, and not as brittle.

**Stainless Steel:** Work surfaces are fabricated from Type 304 stainless steel which provides excellent protection in corrosive environments.

**Epoxy resin:** Epoxy resins, silica, organic fillers, and inert hardeners are cast in forms and cured to a uniform mixture throughout.

### Tables with Stainless Island Top and Solid HD Shelf (Casters sold separately)

Width		Length		Stationary		Work Surface Height Mobile		Approx. Pkd. Wt.		Cat. No.	Cat. No.
(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	Stationary	Mobile*
30.000	762	29.750	755	35.375	898	35.188	893	65	30	LTS30IS	LTSM30IS
30.000	762	35.750	908	35.375	898	35.188	893	80	36	LTS36IS	LTSM36IS
30.000	762	47.750	1212	35.375	898	35.188	893	103	47	LTS48IS	LTSM48IS
30.000	762	59.750	1517	35.375	898	35.188	893	140	63	LTS60IS	LTSM60IS

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (page 195) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

### Tables with Stainless Island Top and 3-Sided Frame (Casters sold separately)

Width (in.) (mm)		Length (in.) (mm)		Work Surface Height		Mobile		Approx.		Cat. No. Stationary	Cat. No. Mobile*
				Stationary (in.) (mm)	Mobile (in.) (mm)	Pkd. Wt. (lbs.) (kg)					
30.000	762	29.750	755	35.375	898	35.188	893	58	26	LTS30UIS	LTSM30UIS
30.000	762	35.750	908	35.375	898	35.188	893	70	32	LTS36UIS	LTSM36UIS
30.000	762	47.750	1212	35.375	898	35.188	893	91	41	LTS48UIS	LTSM48UIS
30.000	762	59.750	1517	35.375	898	35.188	893	119	54		LTSM60UIS

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (page 195) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

### Tables with Stainless Backsplash Top and Solid HD Shelf (Casters sold separately)

Width		Length		Work Surface Height				Approx.		Cat. No. Stationary	Cat. No. Mobile*
(in.)	(mm)	(in.)	(mm)	Stationary (in.)	(mm)	Mobile (in.)	(mm)	Pkd. Wt. (lbs.)	(kg)		
30.000	762	29.750	755	35.375	898	35.188	893	65	30	LTS30S	LTSM30S
30.000	762	35.750	908	35.375	898	35.188	893	80	36	LTS36S	LTSM36S
30.000	762	47.750	1212	35.375	898	35.188	893	103	47	LTS48S	LTSM48S
30.000	762	59.750	1517	35.375	898	35.188	893	140	63	LTS60S	LTSM60S

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (page 195) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

### Tables with Stainless Backsplash and 3-Sided Frame (Casters sold separately)


Width		Length		Work Surface Height				Approx.		Cat. No. Stationary	Cat. No. Mobile*
(in.)	(mm)	(in.)	(mm)	Stationary (in.)	Mobile (mm)	Mobile (in.)	Pkd. Wt. (lbs.) (kg)				
30.000	762	29.750	755	35.375	898	35.188	893	58	26	LTS30US	LTSM30US
30.000	762	35.750	908	35.375	898	35.188	893	70	32	LTS36US	LTSM36US
30.000	762	47.750	1212	35.375	898	35.188	893	91	41	LTS48US	LTSM48US
30.000	762	59.750	1517	35.375	898	35.188	893	119	54	LTS60US	LTSM60US

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (page 195) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

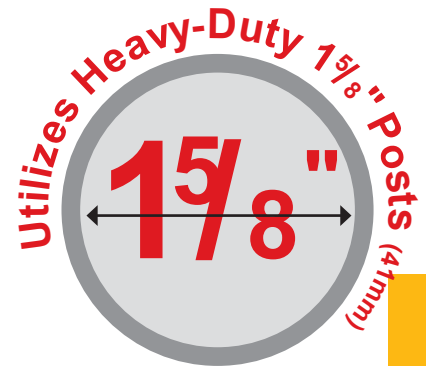

LTSM30IS with casters  
(ordered separately)



LTSM60UIS with optional  
accessories and casters



LTS30US with optional  
accessory wire shelf



LTSM30PB



LTSM60UPB with accessories, casters, backplash, and Starsys™ cart



LTSM30PG



LTSM60UPG with accessories, casters, backplash, and Starsys™ cart

## Stainless Worktables — {52.03}

### Tables with Black Phenolic Top and Solid HD Shelf

(Casters and backplash accessory ordered separately) Utilizes Heavy Duty 1 5/8" (41mm) Posts

Width (in.)	Length (mm)	Length (in.)	Stationary (in.)	Stationary (mm)	Work Surface Height		Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stationary	Cat. No. Mobile*
					Mobile (in.)	Mobile (mm)			
30.000	762	29.750	755	36.000	914	35.875	911	77 35	LTS30PB LTSM30PB
30.000	762	35.750	908	36.000	914	35.875	911	92 41	LTS36PB LTSM36PB
30.000	762	47.750	1212	36.000	914	35.875	911	113 51	LTS48PB LTSM48PB
30.000	762	59.750	1517	36.000	914	35.875	911	141 64	LTS60PB LTSM60PB

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (below) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

### Stainless Tables with Black Phenolic Top and 3-Sided Frame

(Casters and backplash accessory ordered separately) Utilizes Heavy Duty 1 5/8" (41mm) Posts

Width (in.)	Length (mm)	Length (in.)	Stationary (in.)	Stationary (mm)	Work Surface Height		Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stationary	Cat. No. Mobile*
					Mobile (in.)	Mobile (mm)			
30.000	762	29.750	755	36.000	914	35.875	911	70 32	LTS30UPB LTSM30UPB
30.000	762	35.750	908	36.000	914	35.875	911	82 37	LTS36UPB LTSM36UPB
30.000	762	47.750	1212	36.000	914	35.875	911	101 46	LTS48UPB LTSM48UPB
30.000	762	59.750	1517	36.000	914	35.875	911	120 54	LTS60UPB LTSM60UPB

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (below) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

### Stainless Tables with Gray Phenolic Top and Solid HD Shelf

(Casters and backplash accessory ordered separately) Utilizes Heavy Duty 1 5/8" (41mm) Posts

Width (in.)	Length (mm)	Length (in.)	Stationary (in.)	Stationary (mm)	Work Surface Height		Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stationary	Cat. No. Mobile*
					Mobile (in.)	Mobile (mm)			
30.000	762	29.750	755	36.000	914	35.875	911	77 35	LTS30PG LTSM30PG
30.000	762	35.750	908	36.000	914	35.875	911	92 41	LTS36PG LTSM36PG
30.000	762	47.750	1212	36.000	914	35.875	911	113 51	LTS48PG LTSM48PG
30.000	762	59.750	1517	36.000	914	35.875	911	141 64	LTS60PG LTSM60PG

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (below) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

### Stainless Tables with Gray Phenolic Top and 3-Sided Frame

(Casters and backplash accessory ordered separately) Utilizes Heavy Duty 1 5/8" (41mm) Posts

Width (in.)	Length (mm)	Length (in.)	Stationary (in.)	Stationary (mm)	Work Surface Height		Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stationary	Cat. No. Mobile*
					Mobile (in.)	Mobile (mm)			
30.000	762	29.750	755	36.000	914	35.875	911	70 32	LTS30UPG LTSM30UPG
30.000	762	35.750	908	36.000	914	35.875	911	82 37	LTS36UPG LTSM36UPG
30.000	762	47.750	1212	36.000	914	35.875	911	101 46	LTS48UPG LTSM48UPG
30.000	762	59.750	1517	36.000	914	35.875	911	120 54	LTS60UPG LTSM60UPG

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

\*Casters ordered separately. Refer to Caster Selection Guide (below) for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.

## For Stainless Steel Mobile Worktables, Select Appropriate Casters from Chart Below.

(Four brake casters are recommended for maximum table stability)

### Caster Selection Guide

Caster Series	Wheel Material	Rollability	Floor Protection	Noise	Load Rating (lbs.) (kg)		Corrosion Resistance	Cart Washable	Antimicrobial Additive in Wheel
5MDA/5MDBA (brake)	High Modulus Rubber	Good	Good	Low	250	114	Low	No	No
5MP/5MPB (brake)	Polyurethane	Good	Good	Moderate	300	137	Low	No	No
5PC/5PCB (brake)	Polyurethane	Good	Good	Moderate	300	137	High	No	No
5PCM/5PCBM (brake)	Polyurethane	Good	Good	Moderate	300	137	High	No	Yes
5MPGSA/5MPBGSA (brake)	Polyurethane	Good	Good	Moderate	300	137	High	Yes	No

NOTE: The total weight of the equipment and its load should not exceed three times the load rating per caster.

Additional stem casters, in various sizes and wheel materials, are available. Contact your Metro rep for more information.



5MDA



5MP



5PCB



5PCBM



5MPGSA



## Stainless Worktable Accessories — {52.03}

### Backsplash

4" (102mm) high. Attaches to phenolic table top using pre-drilled holes. Match length and color with selected countertop.

Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Black	Cat. No. Gray
27 <sup>3</sup> / <sub>4</sub>	705	5.5	2.5	LT30BSB	LT30BSG
33 <sup>3</sup> / <sub>4</sub>	875	6.5	2.9	LT36BSB	LT36BSG
45 <sup>3</sup> / <sub>4</sub>	1162	7.5	3.4	LT48BSB	LT48BSG
57 <sup>3</sup> / <sub>4</sub>	1466	9.5	4.3	LT60BSB	LT60BSG



LT30BSG

### Wire Shelf

Stainless or Epoxy-coated shelves available.

Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Stainless
22 <sup>3</sup> / <sub>8</sub>	568	6	2.7	LT30WS
28 <sup>3</sup> / <sub>8</sub>	720	7.5	3.4	LT36WS
40 <sup>3</sup> / <sub>8</sub>	1025	10	4.5	LT48WS
52 <sup>3</sup> / <sub>8</sub>	1330	12	5.4	LT60WS

**Note:** Shelves are load rated for a maximum of 150 lbs. (68kg).



LT30WS

### Stainless Keyboard Tray

Fits 48" and 60" (1219 and 1524mm) table lengths

Cat. No. **LTSKB**

**Note:** Stainless keyboard tray and stainless drawer will both fit 60" (1524mm) long table.



LTSKB

### Stainless Drawer

Fits 30", 36", 48" and 60" (760, 914, 1219 and 1524mm) table lengths

Drawer, when fully extended, provides a 7<sup>5</sup>/<sub>8</sub>" (194mm) opening.

Cat. No. **LTSD6**


**Note:** Stainless keyboard tray and stainless drawer will both fit 60" (1524mm) long table.




LTSD6

### Surface Mount Swing Arm for Flat Monitor

Cat. No. **LTFMA**

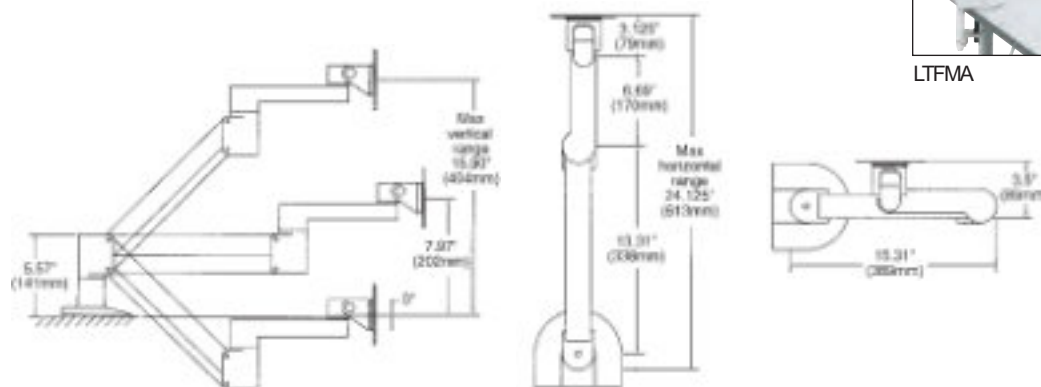

LTFMA

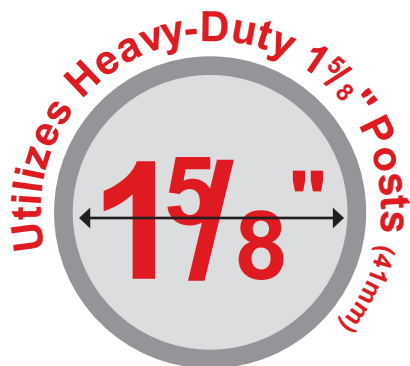

NSF



Worktable with Bottom Shelf

## Worktables — {17.20}

Built for cleanliness and stability.

- Seamless 14-gauge Type 304 stainless steel work surface and support structure.
- Shipped knocked down and can be assembled in minutes without tools.

All Worktables are 34" (864mm) high with stationary posts and leveling feet.

### Standard Worktables — 30" (760mm) Wide

Length (in.)	Length (mm)	Post Material	Bottom Shelf Material	Bottom 3-Sided Frame Material	Bottom H-Frame Material	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
48	1219	SS	SS	—	—	90 41	WT305FS
60	1524	SS	SS	—	—	130 59	WT306FS
72	1825	SS	SS	—	—	170 77	WT307FS
96	2439	SS	SS	—	—	226 103	WT309FS
60	1524	Chrome	Galvanized	—	—	146 66	WT306FC
72	1825	Chrome	Galvanized	—	—	180 82	WT307FC
96	2439	Chrome	Galvanized	—	—	226 103	WT309FC
48	1219	SS	—	SS	—	115 52	WT305US
60	1524	SS	—	SS	—	115 52	WT306US
72	1825	SS	—	SS	—	142 65	WT307US
96	2439	SS	—	SS	—	201 91	WT309US
60	1524	SS	—	—	SS	115 52	WT306HS
72	1825	SS	—	—	SS	142 65	WT307HS
96	2439	SS	—	—	SS	202 92	WT309HS

SS = Stainless Steel

### Standard Worktables — 36" (914mm) Wide

Length (in.)	Length (mm)	Post Material	Bottom Shelf Material	Bottom 3-Sided Frame Material	Bottom H-Frame Material	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
60	1524	SS	SS	—	—	125 57	WT366FS
72	1825	SS	SS	—	—	130 59	WT367FS
96	2439	SS	SS	—	—	185 84	WT369FS
60	1524	Chrome	Galvanized	—	—	125 57	WT366FC
72	1825	Chrome	Galvanized	—	—	130 59	WT367FC
96	2439	Chrome	Galvanized	—	—	185 84	WT369FC
60	1524	SS	—	SS	—	104 47	WT366US
72	1825	SS	—	SS	—	106 48	WT367US
96	2439	SS	—	SS	—	161 73	WT369US
60	1524	SS	—	—	SS	103 47	WT366HS
72	1825	SS	—	—	SS	107 49	WT367HS
96	2439	SS	—	—	SS	162 74	WT369HS

SS = Stainless Steel

### Standard Worktables — 44" (1118mm) Wide


Length (in.)	Length (mm)	Post Material	Bottom Shelf Material	Bottom 3-Sided Frame Material	Bottom H-Frame Material	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
60	1524	SS	SS	—	—	136 62	WT446FS
72	1825	SS	SS	—	—	160 73	WT447FS
96	2439	SS	SS	—	—	202 92	WT449FS
60	1524	Chrome	Galvanized	—	—	136 62	WT446FC
72	1825	Chrome	Galvanized	—	—	160 73	WT447FC
96	2439	Chrome	Galvanized	—	—	202 92	WT449FC
60	1524	SS	—	SS	—	114 52	WT446US
72	1825	SS	—	SS	—	135 61	WT447US
96	2439	SS	—	SS	—	177 81	WT449US
60	1524	SS	—	—	SS	113 51	WT446HS
72	1825	SS	—	—	SS	136 62	WT447HS
96	2439	SS	—	—	SS	178 81	WT449HS

SS = Stainless Steel

NSF



Worktable with H-Frame

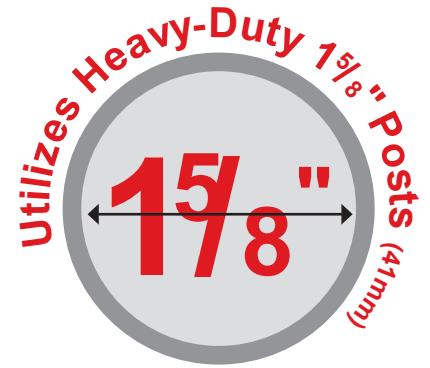

## Mobile Worktables —{17.20}

All Mobile Worktables are 34" (864mm) high. Mobile units have special posts and four 5" (127mm) poly casters—2 swivel/2 brake.

Mobile Worktables —30" (760mm) Wide

Length (in.)	(mm)	Post Material	Bottom Shelf Material	Bottom 3-Sided Frame Material	Bottom H-Frame Material	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
48	1219	SS	SS	—	—	105	48	MWT305FS
60	1524	SS	SS	—	—	160	73	MWT306FS
72	1825	SS	SS	—	—	182	83	MWT307FS
96	2439	SS	SS	—	—	226	103	MWT309FS
60	1524	Chrome	Galvanized	—	—	146	66	MWT306FC
72	1825	Chrome	Galvanized	—	—	180	82	MWT307FC
96	2439	Chrome	Galvanized	—	—	226	103	MWT309FC
48	1219	SS	—	SS	—	130	59	MWT305US
60	1524	SS	—	SS	—	139	63	MWT306US
72	1825	SS	—	SS	—	155	71	MWT307US
96	2439	SS	—	SS	—	201	91	MWT309US
60	1524	SS	—	—	SS	124	56	MWT306HS
72	1825	SS	—	—	SS	156	71	MWT307HS
96	2439	SS	—	—	SS	202	92	MWT309HS



Mobile Worktable

## Worktables with Overhead —{17.26}

All Worktables with Overhead are 30" (760mm) wide and have rear posts that are approximately 88" (2235mm) high. Cantilever shelves for overhead models are sold separately.

Length (in.)	(mm)	Post Material	Bottom Shelf Material	Bottom 3-Sided Frame Material	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
60	1524	SS	SS	—	158	71	WTC306FS
72	1825	SS	SS	—	251	114	WTC307FS
96	2440	SS	SS	—	288	131	WTC309FS
60	1524	Chrome	Galvanized	—	214	97	WTC306FC
72	1825	Chrome	Galvanized	—	251	114	WTC307FC
96	2440	Chrome	Galvanized	—	288	131	WTC309FC
60	1524	SS	—	SS	196	89	WTC306US
72	1825	SS	—	SS	230	105	WTC307US
96	2440	SS	—	SS	267	121	WTC309US

All overhead models are fitted with stationary posts and leveling feet.  
For overhead models in other sizes, contact your InterMetro representative.  
SS = Stainless Steel



Shown with optional  
Cantilever Shelf and  
Utility Rack



Cantilever Shelf

## Cantilever Shelf — {10.67}

Width/Length (in.) (mm)		Fits Unit	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome	Cat. No. Stainless
12x54	304x1372	60" (1524mm) long	11.8	5.3	1254CHC	1254CHS
12x60	304x1524	72" (1830mm) long & 96" (2440mm) long	12.7	5.7	1260CHC	1260CHS

## HD Super® Replacement Parts — {10.69}

**3 1/2" (89mm) Foot Plates**  
Cat. No. 9993HS

**Post Clamps**  
Cat. No. 9994HZ

**Replacement HD Super® Plastic Split Sleeves**  
4 pair per bag  
Cat. No. 9985H

**Replacement HD Super® Aluminum Split Sleeves with Zinc Ring**  
4 pair per bag  
Cat. No. 9986HZ

**Wall Mounting Brackets**  
(not shown)  
Cat. No. 9984HZ

**Replacement 5 1/2" (140mm) Donut Bumpers**  
Cat. No. 9992H  
Abovefit 1 5/8" (41mm) posts only.



3 1/2" (89mm) Foot Plate



Replacement HD Super® Plastic Split Sleeve



Replacement 5 1/2" (140mm) Donut Bumper



Post Clamp




Replacement HD Super® Aluminum Split Sleeve

## Accessories for Worktables with Overhead — {17.26}

### Utility Racks for Overhead Models

Inside dimensions measure 1 15/16" (48mm) high and 4 3/8" (109mm) wide.

Inside Length (in.) (mm)		Fits Units (in.)	Finish	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
51 9/16	1406	60 long	Chrome-Plated	7.7	3.5	654SRC
57 9/16	1406	72 long & 96 long	Chrome-Plated	8.3	3.8	660SRC



Utility Rack



Utility Hook

### Utility Hook for Cantilever Shelves

Width/Height/Depth (in.) (mm)		Finish	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
3/8x3 7/16x1 11/16	9x87x43	Chrome	0.1	.045	HK23C
3/8x3 7/16x1 11/16	9x87x43	Stainless	0.1	.045	HK23S

## Accessories for All Worktables

### Economy Drawer

Overall Dimensions Width/Length/Height (in.) (mm)		Dimensions Inside Bottom (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
14 1/4x28x5 3/4	362x711x146	10x16	254x406	6.8	3.1	WTD21C

### Deluxe Drawer

Table accepts up to two drawers stacked.

Overall Dimensions Width/Length/Height (in.) (mm)		Dimensions Inside Bottom (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
24x25 3/4x7 1/2	610x654x191	20x20	508x508	31	13.9	WTD51S



Deluxe Drawer



# Let's Chat.



[www.metro.com](http://www.metro.com)

Customer Service  
1.800.992.1776



Take  
advantage  
of every  
square inch.



qwikTrack®  
Top-Track®

# HIGH-DENSITY STORAGE & SEISMIC SHELVING

High-Density Movable Aisle Shelving .....	108-111
Vertical High-Density Shelving .....	112-116
Seismic Shelving .....	117-121

# So smart...

## qwikTRAK® High-Density Storage



BOOST  
STORAGE SPACE  
BY UP TO  
**50%**  
WITH NO ADDED  
CONSTRUCTION  
COSTS.

### qwikTRAK key facts

The aluminum and stainless steel floor tracks provide a smooth, gliding surface for mobile units.

- Mobile units are designed to move easily and store heavy weight loads. MetroMax i mobile qwikTRAK units can hold up to 1,200 lbs. (544kg). MetroMax Q, Super Adjustable, and Super Erecta mobile qwikTRAK units can hold up to 2,000 lbs. (907kg). MetroMax 4 units can hold up to 800 lbs. (363kg).
- Floor tracks protect the floors from wear and tear and do not require to be mounted to the floor.
- Floor tracks compensate for rough or choppy floor surfaces.

**Double-Deep Configurations** can be created where two systems are joined together to increase the overall depth of the storage system for even greater storage capacity.

#### Choose the shelving type based on the application.

Both single- and double-deep systems can be used with Metro wire shelving (Super Erecta or Super Adjustable Super Erecta) and polymer shelving systems (MetroMax i and MetroMax Q).

Note: MetroMax 4 can be used on single-deep systems.



NSF

THE SECRET TO  
HIGH-DENSITY  
STORAGE IS THE  
**ACTIVE  
AISLE**  
CONCEPT.



# it's dense.

## Top-Track® High-Density Storage




### Metro Advantage.

All-Polymer Options Available



TRADITIONAL STORAGE USES UP TO 20' OF SPACE

HIGH DENSITY  
STORAGE. . .  
THE SMART WAY  
TO PUT SPACE  
TO WORK.

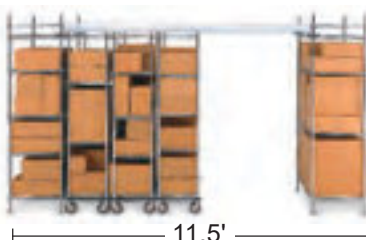

11.5'

### Top-Track key facts

The guide track is positioned above the shelving system.

- Floors are easy to clean.
- Utility carts can easily be rolled into and out of the active aisle.
- The guide track compensates for uneven floor surfaces and keeps units in alignment.
- Mobile units are designed to address medium-duty applications. The weight capacity of a Top-Track mobile unit is 900 lb. (410kg).

#### Choose the shelving type based on your application.

**Top-Track** (single deep) can be used with Metro wire shelving (Super Erecta or Super Adjustable Super Erecta) and polymer shelving systems (MetroMax i and MetroMax Q).

**Double-Deep configurations** can be created when two systems are joined together to increase the overall depth of the storage system for even greater storage capacity. Double-Deep Top-Track is only available for Super Erecta and Super Adjustable Super Erecta style shelving.

# HIGH-DENSITY STORAGE — QWIKTRAK®



## qwikTRAK Storage System — {11.15}

Super Erecta, Super Erecta Pro, Super Adjustable, MetroMax Q, MetroMax i, MetroMax 4



MetroMax i qwikTRAK

**Choosing shelves:** All end, intermediate, and mobile units must be 18" (457mm) or wider. Each stationary end and intermediate unit must have a minimum of four shelves. Super Adjustable shelves may be used for all tiers.

### Stationary End Unit Kit (Choose one kit for each system)


Includes 74" high posts (1880mm) high stationary posts, and hardware necessary for connecting stationary end units to tracks. Shelves are sold separately.

## Getting started:

Document the available floor space


- Actual length: Nominal track length + the nominal width of each end unit + 3" (76mm)
- Actual width: Nominal Shelf length + 3 1/2" (89mm)
- Actual height of a mobile qwikTRAK unit is:  
Nominal post height + 4.5" (115mm)

*It is recommended that the tracks are installed at least 2" (52mm) from the wall.*



### Shelves Sold Separately

MetroMax i — Pg. 12    Super Erecta — Pg. 42  
MetroMax 4 — Pg. 14    Super Adjustable — Pg. 37  
MetroMax Q — Pg. 16    Super Erecta Pro — Pg. 34




Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta					MetroMax Q Steel Posts			MetroMax Polymer Posts		
Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome-Plated	 Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
39.6	18.0	BTEC	BTEK3	BTES	42.0	19.1	BTEQ3	25.0	11.4	BTEX3

### Stationary Intermediate Units

Required when overall desired track length exceeds 21' (6405mm). Optional when track length is under 21' (6405mm). Includes 74" high posts (1880mm) high stationary posts, and hardware necessary for connecting one stationary intermediate unit to tracks. Shelves are sold separately.





Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta					MetroMax Q Steel Posts			MetroMax Polymer Posts		
Approx. Pkd. Wt. (lbs.)    (kg)		Cat. No. Chrome-Plated	 Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel	Approx. Pkd. Wt. (lbs.)    (kg)		Cat. No.	Approx. Pkd. Wt. (lbs.)    (kg)		Cat. No.
22.6	10.3	BTAC	BTAK3	BTAS	24.2	11.0	BTAQ3	15.7	7.1	BTAX3

### Mobile Units (One kit required per mobile unit)

Includes four 74" (1880mm) high mobile posts, four casters, donut bumpers, and other hardware to assemble a mobile unit. Shelves are sold separately.

Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).



Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta					MetroMax Q Steel Posts			MetroMax Polymer Posts		
Approx. Pkd. Wt. (lbs.)    (kg)		Cat. No. Chrome-Plated	 Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel	Approx. Pkd. Wt. (lbs.)    (kg)		Cat. No.	Approx. Pkd. Wt. (lbs.)    (kg)		Cat. No.
25.0	11.4	BTMC	BTMK3	BTMS	27.0	12.3	BTMQ3	18.5	8.4	BTMX3

**Note:** Casters feature an acetyl grooved wheel. Chrome plated (BTMC) includes casters with plated steel components. BTMK3/BTMS/BTMQ3/BTMX3 include casters with stainless components.

**Track Sets** Includes tracks and hardware needed to assemble track runs up to 21' (6400mm).

✓ Indicates antimicrobial product.

Length (ft.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.	Length (ft.)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.
2.5	762	4	1.8	BTS2.5NA	14	4267	19	8.6	BTS14NA
6	1828	9	4.1	BTS6NA	15	4572	21	9.5	BTS15NA
7	2135	10	4.5	BTS7NA	16	4877	22	10.0	BTS16NA
8	2440	11	5.0	BTS8NA	17	5182	23	10.5	BTS17NA
9	2743	13	5.9	BTS9NA	18	5486	25	11.4	BTS18NA
10	3048	14	6.4	BTS10NA	19	5791	26	11.8	BTS19NA
11	3352	15	6.8	BTS11NA	20	6096	27	12.3	BTS20NA
12	3657	17	7.7	BTS12NA	21	6400	29	13.2	BTS21NA
13	3962	18	8.2	BTS13NA					

**Note:** BTS2.5NA includes a joining kit to connect the tracks to other track sets.

#### Notes:

1. qwikTRAK is available with 74" posts (1880mm) as standard. Requests for TALLER posts must be reviewed by Metro Engineering. For applications requiring posts SHORTER than 74" (1880mm), contact your Metro representative.
2. Existing Metro Super Erecta, Super Adjustable, MetroMax Q, and MetroMax i shelving units can be retrofitted as part of a qwikTRAK installation.
3. Weight capacities for standard qwikTRAK: Super Erecta, Super Adjustable, MetroMax Q systems are designed to hold up to 2,000 lbs. (907kg) per shelving unit. MetroMax i stationary units can hold up to 2,000 lbs. (907kg); MetroMax i mobile units can hold up to 1,200 lbs. (544kg) per unit. MetroMax 4 stationary units can hold up to 2,000 lbs. (907kg); MetroMax 4 mobile units can hold up to 800 lbs. (363kg) per unit.
4. Added rigidity for heavily loaded systems. Super Erecta standard adjustment shelves provide the most rigid wire shelving mobile units; Recommended when configuring systems using 60" and 72" long shelves subject to the heaviest loads and frequent movement (multiple times daily). MetroMax Q epoxy coated steel posts may be used with MetroMax i shelves for added rigidity when managing sensitive packaged items and heavier unit loads; steel posts are corrosion resistant.

## Double-Deep qwikTRAK Storage System — {11.15}

Super Erecta, Super Erecta Pro, Super Adjustable, MetroMax Q, MetroMax i

### Getting started:


Document the available floor space

- Actual length: Nominal track length + the nominal width of each end unit + 3" (76mm)
- Actual width: Nominal Shelf length + 3 1/2" (89mm)
- Actual height of a mobile qwikTRAK unit is:  
Nominal post height + 4.5" (115mm)

*It is recommended that the tracks are installed at least 2" (52mm) from the wall.*

### Shelves Sold Separately

MetroMax i — Pg. 12    Super Erecta — Pg. 42  
MetroMax 4 — Pg. 14    Super Adjustable — Pg. 37  
MetroMax Q — Pg. 16    Super Erecta Pro — Pg. 34



**Choosing shelves:** All end, intermediate, and mobile units must be 18" (457mm) or wider. Each stationary end and intermediate unit must have a minimum of four shelves. Super Adjustable shelves may be used for all tiers; Mobile units require standard Super Erecta for top and bottom shelves.

### Stationary End Unit Kit (Choose One per double-deep System)

Includes 74" high posts (1880mm) high stationary posts, and hardware necessary for connecting stationary end units to tracks. Shelves are sold separately



#### Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta

Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome-Plated	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel
73.6	33.5	<b>LBTEC</b>	<b>LBTEK3</b>	<b>LBTES</b>


#### MetroMax Q Steel Posts

#### MetroMax Polymer Posts

Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
76.3	34.7	<b>LBTEQ3</b>	42.3	19.2	<b>LBTEX3</b>

### Stationary Intermediate Units

Includes 74" high posts (1880mm) high stationary posts and hardware necessary for connecting one double-deep stationary intermediate unit to tracks and anchoring tracks to the floor. Shelves are sold separately.



#### Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta

Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome-Plated	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel
39.6	18.0	<b>LBTAC</b>	<b>LBTAK3</b>	<b>LBTAS</b>

#### MetroMax Q Steel Posts

#### MetroMax Polymer Posts

Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
41.3	18.8	<b>LBTAQ3</b>	24.3	11.0	<b>LBTAX3</b>

### Mobile Units (One kit required per Double-Deep Mobile Unit)

Includes (8) 74" (1880mm) high —UPposts, (4) V-groove casters, (1) stainless steel center channel caster assembly, donut bumpers, Tie Bar Brackets, and other hardware. Shelves are sold separately.

Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).



#### Super Erecta, Super Erecta Pro, Super Adjustable Super Erecta

Shelf Width (in.)	Shelf Width (mm)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel
18	457	<b>LBTM18C</b>	<b>LBTM18K3</b>	<b>LBTM18S</b>
21	530	<b>LBTM21C</b>	<b>LBTM21K3</b>	<b>LBTM21S</b>
24	610	<b>LBTM24C</b>	<b>LBTM24K3</b>	<b>LBTM24S</b>

#### MetroMax Q Steel Posts

#### MetroMax Polymer Posts

Cat. No.	Cat. No.
<b>LBTM18Q3</b>	<b>LBTM18X3</b>
<b>LBTM21Q3</b>	—
<b>LBTM24Q3</b>	<b>LBTM24X3</b>

**Note:** Casters feature acetyl grooved wheel. Chrome kit includes casters with steel components. Metroseal 3/Stainless Steel/MetroMax Q/MetroMax i kits include casters with stainless components.

### Track Sets Includes tracks and hardware needed to assemble Double-Deep qwikTRAK systems up to 21' (6400mm).

✓ Indicates antimicrobial product.

Length (ft.)	Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.	Length (ft.)	Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
2.5	762	4	1.8	<b>LBTS2.5NA</b>	14	4267	19	8.6	<b>LBTS14NA</b>
6	1828	9	4.1	<b>LBTS6NA</b>	15	4572	21	9.5	<b>LBTS15NA</b>
7	2135	10	4.5	<b>LBTS7NA</b>	16	4877	22	10.0	<b>LBTS16NA</b>
8	2440	11	5.0	<b>LBTS8NA</b>	17	5182	23	10.5	<b>LBTS17NA</b>
9	2743	13	5.9	<b>LBTS9NA</b>	18	5486	25	11.4	<b>LBTS18NA</b>
10	3048	14	6.4	<b>LBTS10NA</b>	19	5791	26	11.8	<b>LBTS19NA</b>
11	3352	15	6.8	<b>LBTS11NA</b>	20	6096	27	12.3	<b>LBTS20NA</b>
12	3657	17	7.7	<b>LBTS12NA</b>	21	6400	29	13.2	<b>LBTS21NA</b>
13	3962	18	8.2	<b>LBTS13NA</b>					

**Note:** LBTS2.5NA includes a joining kit to connect the track to other track sets.

#### Notes:

1. qwikTRAK is available with 74" posts (1880mm) as standard. Requests for TALLER posts must be reviewed by Metro Engineering. For applications requiring posts SHORTER than 74" (1880mm), contact your Metro representative.
2. Maximum allowable shelf length for use with a double-deep system is 60" (1524mm).
3. The maximum width of a double-deep configuration is 10'6" (3200mm). (i.e., two systems, each having 60" (1524mm) long shelves, plus 6" (150mm) for qwikTRAK components.
4. Weight capacities: Double Deep Mobile Units — Super Erecta/Super Adjustable, Super Erecta/MetroMax Q: 3,000 lbs. (1364kg) evenly distributed. MetroMax i: 1,800 lbs. (818kg) evenly distributed. Stationary End and Intermediate Units — Each end and intermediate double deep unit consists of two independent stationary shelving units positioned side by side. Each shelving unit has a maximum weight capacity of 2,000 lbs. (907kg).



# THE ONLY ALL-POLYMER SHELVING

strong enough  
for overhead track  
systems.





## Top-Track Storage System — {9.29}

Polymer Shelving — MetroMax i, MetroMax 4, MetroMax Q




### Getting started:

Document the available floor space

- Actual length: Nominal track length + the nominal width of each end unit + 2" (51mm)
- Actual width: Nominal Shelf length + 3 1/2" (89mm)
- Actual height of system is approx. 87" (2210mm)

*It is recommended that the tracks are installed at least 5" (127mm) from the wall.*



### Shelves Sold Separately

MetroMax i — Pg. 12  
MetroMax 4 — Pg. 14  
MetroMax Q — Pg. 16

### Stationary End Unit Kit (Order one per Top-Tracksystem)

Includes hardware and components to connect track sets to two stationary end units. 86" (2185mm) posts included. Shelves are ordered separately.

		<b>i&amp;4</b> Cat. No. End Unit Kit	<b>Q</b> Cat. No. End Unit Kit
Fits Shelf Width (in.)	(mm)		
18	457	<b>MXTTE18</b>	<b>MQTTE18</b>
21	530	<b>MXTTE21</b>	<b>MQTTE21</b>
24	610	<b>MXTTE24</b>	<b>MQTTE24</b>

The system compensates for uneven floor surfaces. Floor should be smooth and free from large cracks or raised obstacles. Maximum load capacity for mobile units is 900 lbs. (400kg).

### Stationary Intermediate Unit Kit

Required when overall desired track length exceeds 21' (6405mm). Optional when track length is under 21' (6405mm). Includes 74" high posts (1880mm) high stationary posts, and hardware necessary for connecting one stationary intermediate unit to tracks. Shelves are sold separately.


		<b>i&amp;4</b> Cat. No. Intermediate Unit Kit	<b>Q</b> Cat. No. Intermediate Unit Kit
Fits Shelf Width (in.)	(mm)		
18	457	<b>MXTTA18</b>	<b>MQTTA18</b>
21	530	<b>MXTTA21</b>	<b>MQTTA21</b>
24	610	<b>MXTTA24</b>	<b>MQTTA24</b>



### Mobile Unit Kit (Order one per mobile unit)

Kit includes 74" (1880mm) posts, rigid casters, caster channels, bumpers, and roller assemblies. Shelves are sold separately.

		<b>i&amp;4</b> Cat. No. with Plated Casters	<b>i&amp;4</b> Cat. No. with Stainless Casters	<b>Q</b> Cat. No. with Plated Casters	<b>Q</b> Cat. No. with Stainless Casters
Fits Shelf Width (in.)	(mm)				
18	457	<b>MXTTM18C</b>	<b>MXTTM18S</b>	<b>MQTTM18C</b>	<b>MQTTM18S</b>
21	530	<b>MXTTM21C</b>	<b>MXTTM21S</b>	<b>MQTTM21C</b>	<b>MQTTM21S</b>
24	610	<b>MXTTM24C</b>	<b>MXTTM24S</b>	<b>MQTTM24C</b>	<b>MQTTM24S</b>



Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).

### Track Sets (One track set is required between stationary units)

Includes necessary sections of track for assembling track runs of 6' to 21' (1830-6405mm).

Length (feet)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	Length (feet)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
(mm)					(mm)				
2 1/2	762	15	6.8	<b>TTS2.5NA</b>	14	4267	98	44.1	<b>TTS14NA</b>
6	1828	40.5	18.2	<b>TTS6NA</b>	15	4572	106.5	47.9	<b>TTS15NA</b>
7	2135	47.5	21.3	<b>TTS7NA</b>	16	4877	113.5	51	<b>TTS16NA</b>
8	2440	56	25.2	<b>TTS8NA</b>	17	5182	121	54.4	<b>TTS17NA</b>
9	2743	62.5	28.1	<b>TTS9NA</b>	18	5486	128	51.6	<b>TTS18NA</b>
10	3048	69.5	31.2	<b>TTS10NA</b>	19	5791	135	60.7	<b>TTS19NA</b>
11	3353	76.5	34.4	<b>TTS11NA</b>	20	6096	142	63.9	<b>TTS20NA</b>
12	3657	83.5	37.5	<b>TTS12NA</b>	21	6400	149	67	<b>TTS21NA</b>
13	3962	92	41.4	<b>TTS13NA</b>					

**Note:** TTS2.5NA includes a joining kit to connect the tracks to longer track sections.

#### Notes:

1. Mobile, stationary end, and intermediate units must have a minimum of 4 shelves.
2. Mobile Units: If 18" (457mm) wide mobile units are planned, the maximum allowable size shelf is 60" (1524mm) long. If 18" (457mm) wide by 60" (1524mm) long mobile units are planned, a maximum of five 18" (457mm) mobile units are allowable between two stationary units. 18" (457mm), 21" (530mm) and 24" (610mm) wide mobile units can be intermixed in a given system. The standard system requires 74" (1880mm) posts on the mobile units. Recommended maximum load rating for a mobile unit is 900 lbs. (410kg).
3. To accommodate bumpers, the actual size of a mobile unit is 2.5" (63.5mm) wider than the shelf width shown. For example, an 18" (457mm) wide unit is actually 20.5" (521mm).
4. MetroMax Q epoxy coated steel posts may be used with MetroMax i shelves for added rigidity; steel posts are corrosion resistant.

## Top-Track Storage System — {11.12}

Wire Shelving — Super Erecta, Super Erecta Pro, Super Adjustable




Super Erecta® Top-Track®

### Getting started:

Document the available floor space

- Actual length: Nominal track length + the nominal width of each end unit + 2" (51mm)
- Actual width: Nominal Shelf length + 3 1/2" (89mm)
- Actual height of system is approx. 87" (2210mm)

*It is recommended that the tracks be installed at least 5" (127mm) from the wall.*



### Shelves Sold Separately


Super Erecta — Pg. 42  
Super Adjustable — Pg. 37  
Super Erecta Pro — Pg. 34

**Choosing shelves:** Each stationary end and intermediate unit must have a minimum of four shelves. For all Super Adjustable applications, the top and bottom shelves must be round collar Super Erecta shelves. All shelves are ordered separately.

### Stationary End Unit Kits (One kit is required per single system)

Includes hardware necessary for connecting stationary end units to track. 86" (2185mm) posts are included. Shelves sold separately.


Shelf Width (in.)	Shelf Width (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome-Plated	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel
18	457	11	4.9	TTE18C	TTE18K3	TTE18S
21	530	11.5	5.1	TTE21C	TTE21K3	TTE21S
24	610	12	5.4	TTE24C	TTE24K3	TTE24S



### Stationary Intermediate Units

Required when overall desired track length exceeds 21' (6405mm). Optional when track length is under 21' (6405mm). Includes 74" high posts (1880mm) high stationary posts, and hardware necessary for connecting one stationary intermediate unit to tracks. Shelves are sold separately.

Shelf Width (in.)	Shelf Width (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome-Plated	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel
18	457	7.5	3.3	TTA18C	TTA18K3	TTA18S
21	530	8	3.6	TTA21C	TTA21K3	TTA21S
24	610	8.5	3.8	TTA24C	TTA24K3	TTA24S



### Mobile Unit Kits (One kit required per mobile unit)

Kit includes special 74" (1880mm) posts, casters/caster channels, donut bumpers, and roller bearing assemblies. Shelves are sold separately.

If 18" wide mobile units are planned, the maximum allowable length shelf is 60" (1524mm) long. If 18" (457mm) wide by 60" (1524mm) long mobile units are planned, a maximum of five 18" (457mm) mobile units are allowable between two stationary units. 18" (457mm), 21" (530mm), 24" (610mm) wide mobile units can be intermixed in a given system.

Shelf Width (in.)	Shelf Width (mm)	Overall Width (in.)	Overall Width (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome-Plated	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel
18	457	20 1/4	514	32	14.4	TTM18C	TTM18K3	TTM18S
21	530	23 1/4	590	33	14.8	TTM21C	TTM21K3	TTM21S
24	610	26 1/4	667	34	15.3	TTM24C	TTM24K3	TTM24S

**Note:** Casters feature wheels with polyurethane tread. Chrome plated kits include casters with plated steel components. Metroseal 3 and Stainless Steel kits include casters with stainless steel components.

Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).



### Track Sets Includes tracks and hardware needed to assemble track runs up to 21' (6400mm).

Length (feet)	Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.	Length (feet)	Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
2 1/2	762	15	6.8	TTS2.5NA	14	4267	98	44.1	TTS14NA
6	1828	40.5	18.2	TTS6NA	15	4572	106.5	47.9	TTS15NA
7	2135	47.5	21.3	TTS7NA	16	4877	113.5	51	TTS16NA
8	2440	56	25.2	TTS8NA	17	5182	121	54.4	TTS17NA
9	2743	62.5	28.1	TTS9NA	18	5486	128	51.6	TTS18NA
10	3048	69.5	31.2	TTS10NA	19	5791	135	60.7	TTS19NA
11	3353	76.5	34.4	TTS11NA	20	6096	142	63.9	TTS20NA
12	3657	83.5	37.5	TTS12NA	21	6400	149	67	TTS21NA
13	3962	92	41.4	TTS13NA					

**Note:** TTS2.5NA includes a joining kit to connect the tracks to longer track sections.

#### Additional Notes:

1. To accommodate bumpers, the actual size of a mobile unit is 2.5" (63.5mm) wider than the shelf width shown. For example, an 18" (457mm) wide unit is actually 20.5" (521mm).
2. Recommended maximum load rating for a mobile unit is 900 lbs. (410kg). Floor should be level, smooth, and free from large cracks and raised obstacles.
3. Added rigidity for heavily loaded systems. Super Erecta standard adjustment shelves provide the most rigid wire shelving mobile units; Recommended when configuring systems using 60" (1524mm) and 72" (1829mm) long shelves subject to the heaviest loads and frequent movement (multiple times daily).

## Easy Order with one Part #.

Get all you need to create efficient high-density storage under one simple part number.

### 10ft. Fits spaces 10ft. and over

Complete System Length		System Width		Chrome Top-Track Easy Order Model	Super Erecta Pro Top-Track Easy Order Model
(ft./in.)	(mm)	(in.)	(mm)		
9' 7"	2921	48	1219	TT10-E2148M1848C	TT10-E2148M1848P
9' 7"	2921	60	1524	TT10-E2160M1860C	TT10-E2160M1860P

#### Models Contain

(1) 6' Track Set, (8) 86" Posts, (1) 18" Tie Bar End Kit, (8) 74" Top Trk Mobile Posts, (2) 18" Mobile Kits, (16) Shelves

**Note:** Chrome systems use chrome posts and plated casters. SE Pro uses Metroseal 3 Posts and Stainless casters.



21" (530mm) End Width

18" (457mm) Mobile Width

48" (1219mm) or 60" (1524mm) Shelf Length

### 12ft. Fits spaces 12ft. and over

Complete System Length		System Width		Chrome Top-Track Easy Order Model	Super Erecta Pro Top-Track Easy Order Model
(ft./in.)	(mm)	(in.)	(mm)		
11' 7"	3531	48	1219	TT12-E2448M1848C	TT12-E2448M1848P
11' 7"	3531	60	1524	TT12-E2460M1860C	TT12-E2460M1860P

#### Models Contain

(1) 7.5' Track Set, (8) 86" Posts, (1) 18" Tie Bar End Kit, (12) 74" Top Trk Mobile Posts, (3) 18" Mobile Kits, (20) Shelves

**Note:** Chrome systems use chrome posts and plated casters. SE Pro uses Metroseal 3 Posts and Stainless casters.



24" (610mm) End Width

18" (457mm) Mobile Width

48" (1219mm) or 60" (1524mm) Shelf Length

### 14ft. Fits spaces 14ft. and over

Complete System Length		System Width		Chrome Top-Track Easy Order Model	Super Erecta Pro Top-Track Easy Order Model
(ft./in.)	(mm)	(in.)	(mm)		
13' 7"	4140	48	1219	TT14-E2448M1848C	TT14-E2448M1848P
13' 7"	4140	60	1524	TT14-E2460M1860C	TT14-E2460M1860P

#### Models Contain

(1) 9.5' Track Set, (8) 86" Posts, (1) 18" Tie Bar End Kit, (16) 74" Top Trk Mobile Posts, (4) 18" Mobile Kits, (24) Shelves

**Note:** Chrome systems use chrome posts and plated casters. SE Pro uses Metroseal 3 Posts and Stainless casters.



24" (610mm) End Width

18" (457mm) Mobile Width

48" (1219mm) or 60" (1524mm) Shelf Length

### 16ft. Fits spaces 16ft. and over

Complete System Length		System Width		Chrome Top-Track Easy Order Model	Super Erecta Pro Top-Track Easy Order Model
(ft./in.)	(mm)	(in.)	(mm)		
15' 7"	4750	48	1219	TT16-E2448M2448C	TT16-E2448M2448P
15' 7"	4750	60	1524	TT16-E2460M2460C	TT16-E2460M2460P

#### Models Contain

(1) 11.5' Track Set, (8) 86" Posts, (1) 18" Tie Bar End Kit, (16) 74" Top Trk Mobile Posts, (4) 18" Mobile Kits, (24) Shelves

**Note:** Chrome systems use chrome posts and plated casters. SE Pro uses Metroseal 3 Posts and Stainless casters.



24" (610mm) End Width


24" (610mm) Mobile Width

48" (1219mm) or 60" (1524mm) Shelf Length

The numbers don't lie...

**30%**  
More Storage.

Conventional 16' of Storage



16' of Top-Track Storage



## Double-Deep Top-Track Storage System — {11.12}

Wire Shelving — Super Erecta, Super Erecta Pro, Super Adjustable


**Stationary End Units** (One kit required for entire double deep configuration)  
Includes hardware necessary for connecting stationary end units in double-deep systems and connecting to an overhead track set. 86" (2185mm) posts included. Shelves sold separately.

Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome-Plated
18 457	33 14.8	LTTE18C
21 530	37 16.6	LTTE21C
24 610	41 18.4	LTTE24C



**Stationary Intermediate Units** (One kit required for Intermediate units connected end-to-end) Includes hardware necessary for connecting intermediate units in double-deep systems and connecting to an overhead track set on each side. 86" (2185mm) posts included.

Shelf Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome-Plated
18 457	18 8	LTTA18C
21 530	20 9	LTTA21C
24 610	22 9.9	LTTA24C



**Mobile Unit Kits** (One kit required per mobile unit)

Includes posts, casters, caster channels, donut bumpers, roller bearing assemblies, and tie-together hardware to connect two mobile units.

Shelf Width (in.) (mm)	Overall Width (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome-Plated
18 457	20 1/4 514	72 32.4	LTTM18C
21 530	23 1/4 590	75 33.7	LTTM21C
24 610	26 1/4 667	78 35	LTTM24C



**Track Sets** Includes necessary sections of track for assembling track runs up to 21' (6400mm). For track sizes within the even 1-foot (305mm) increments, contact your Metro representative. Only one track set is required between stationary units.

Length (feet) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.	Length (feet) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
2 1/2 762	15 6.8	TTS2.5NA	14 4267	98 44.1	TTS14NA
6 1828	40.5 18.2	TTS6NA	15 4572	106.5 47.9	TTS15NA
7 2135	47.5 21.3	TTS7NA	16 4877	113.5 51	TTS16NA
8 2440	56 25.2	TTS8NA	17 5182	121 54.4	TTS17NA
9 2743	62.5 28.1	TTS9NA	18 5486	128 51.6	TTS18NA
10 3048	69.5 31.2	TTS10NA	19 5791	135 60.7	TTS19NA
11 3353	76.5 34.4	TTS11NA	20 6096	142 63.9	TTS20NA
12 3657	83.5 37.5	TTS12NA	21 6400	149 67	TTS21NA
13 3962	92 41.4	TTS13NA			

Note: TTS2.5NA includes a joining kit to connect the tracks to longer track sections.

### Notes:


- Each stationary end and intermediate unit **must** have a minimum of four shelves. For all Super Adjustable applications, the top and bottom shelves must be non "quick adjust" Super Erecta shelves.
- The standard Double Deep Top-Track system requires the use of 86" (2185mm) posts (i.e., 86P) on the stationary end and intermediate units. **Shelves for the stationary end and intermediate units are sold separately.**
- The mobile unit kits include special 74" (1880mm) posts with casters. **Shelves for mobile units are sold separately.**
- Under normal conditions, an aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).
- Two intermediate shelving units connected end-to-end are required when the track length exceeds 21 feet (6400mm). Stationary intermediate shelving units may be used at the discretion of the user when track lengths are less than 21 feet (6400mm).
- The maximum Double Deep system configuration is 10'6" (3200mm) (i.e., two systems, each having 60" (1524mm) long shelves, plus 6" (150mm) for Top-Track components).
- Ease of rollability for the mobile units is an important consideration in evaluating Top-Track as a possible storage alternative. The floor should be level, smooth, and free from large cracks and raised obstacles. Two mobile shelving units connected end-to-end and loaded with between 800 to 1,200 lbs. (365-550kg) will require a human effort range (in lbs. of human force) of between 18-24 lbs. (8-11kg) to move the unit from a complete stop. Subjectively, an average 110 lb. (50kg) person will perceive this as acceptable effort levels. For loads over 1,200 lbs. (550kg), contact your Metro representative.
- Mobile units should have the top shelf positioned as close as possible to the track.
- To accommodate bumpers, the actual size of a mobile unit is 2.5" (63.5mm) wider than the shelf width shown. For example, an 18" (457mm) wide unit is actually 20.5" (52mm).
- To calculate the overall length of a Super Erecta Top Track System, add the following:  
Nominal track length + Nominal widths of each end unit + 1.5" (38mm).

## Getting started:

Document the available floor space

- Actual length: Nominal track length + the nominal width of each end unit + 2" (51mm)
- Actual width: Nominal Shelf length + 3 1/2" (89mm)
- Actual height of system is approx. 87" (2210mm)

*It is recommended that the tracks are installed at least 5" (127mm) from the wall.*

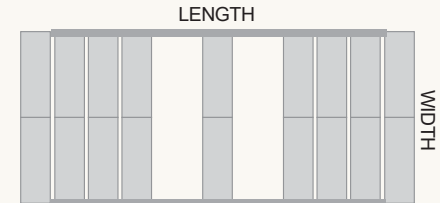

### Shelves Sold Separately

Super Erecta — Pg. 42  
Super Adjustable — Pg. 37  
Super Erecta Pro — Pg. 34

Note: for other finishes please contact your Metro representative.

For Top-Track accessories, see page 118.



## Seismic Top-Track® Single Length System

### End Unit Kit:

Includes four shelves, four staked posts, bracket bars, sway braces (for top, back, and end), anchor plates, foot plates, tubular braces, clamps, and assembly hardware.

Description	Cat. No.
Kit for 48" (1219mm) Stationary End Unit	SA48TTS
Kit for 54" (1370mm) Stationary End Unit	SA54TTS
Kit for 60" (1524mm) Stationary End Unit	SA60TTS

### Strut Kit:


Description	Cat. No.
Kit for 48" (1219mm) Wide Unit	TTB48STRUT
Kit for 54" (1370mm) Wide Unit	TTB54STRUT
Kit for 60" (1524mm) Wide Unit	TTB60STRUT

**Note:** Floor anchoring hardware not included.

Example: For a complete "Single-Length Top-Track® System," the following would be required: Two Stationary End Units, One TrackSet\* (11-foot [3355mm] maximum), One Center Strut (if track length exceeds 7 feet), Mobile Units.

Note: Posts and shelves are included in the end and intermediate unit kits. Shelves are sold separately for the mobile unit.

Add track sets and mobile unit kits, refer to page 116.

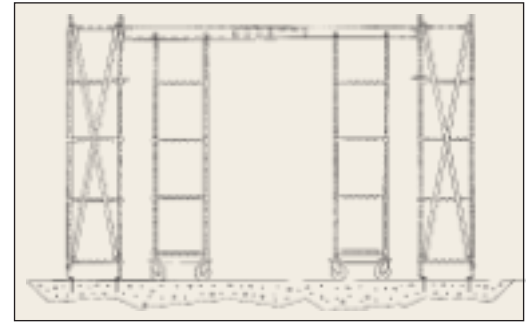

Single-Length System

## Seismic Top-Track® Double Length System

### End Unit Kits:

Includes four shelves, four staked posts, bracket bars, sway braces (for top, back, and end), anchor plates, foot plates, tubular braces, clamps, and assembly hardware.

Description	Cat. No.
Kit for 48" (1219mm) Stationary End Unit	SA48TTS
Kit for 54" (1370mm) Stationary End Unit	SA54TTS
Kit for 60" (1524mm) Stationary End Unit	SA60TTS

### Intermediate Unit Kits:

Includes eight shelves, eight staked posts, bracket bars, sway braces (for top, back, and end), anchor plates, foot plates, tubular braces, clamps, and assembly hardware.

Description	Cat. No.
Kit for 48" (1219mm) Stationary Intermediate Unit	SA48TTIS
Kit for 54" (1370mm) Stationary Intermediate Unit	SA54TTIS
Kit for 60" (1524mm) Stationary Intermediate Unit	SA60TTIS

### Strut Kit:

Description	Cat. No.
Kit for 48" (1219mm) Wide Unit	TTB48STRUT
Kit for 54" (1370mm) Wide Unit	TTB54STRUT
Kit for 60" (1524mm) Wide Unit	TTB60STRUT


**Note:** Floor anchoring hardware not included.

Example: For a complete "Double-Length Top-Track® System," the following would be required: Two Stationary End Units, Two TrackSets\* (11-foot [3355mm] maximum), One Intermediate Unit, Two Center Struts (if track length exceeds 7 feet [2135mm]), Mobile Units.\*

Note: Posts and shelves are included in the end and intermediate unit kits. Shelves are sold separately for the mobile unit.

### Notes:

- Each installation must have two stationary end units for a single-track length of 7' (2135mm) to 11' (3355mm).
- A center strut is required for each track section over 7' (2135mm).
- For track lengths over 11' (3355mm), an intermediate unit is required, thus creating a double-length system.
- Seismic Top-Track is based upon a weight-loading capacity of 25 lbs. (11kg) per square foot on a four-shelf stationary and mobile units, with maximum of 900 lbs. (408kg) per mobile unit. Additional shelves may be added, but are limited to a maximum load of 25 lbs. (11kg) per cubic foot per unit.
- A maximum of four 21" (640mm) or 24" (610mm), or five 18" (457mm) mobile units are allowed per an 11' (3355mm) track length, with no more than a 900 lb. (408kg) weight capacity per mobile unit.
- Stationary End Units are available in 24"x48" (610x1219mm), 24"x54" (610x1370mm), and 24"x60" (610x1524mm).
- Seismic Top-Track design is based on the use of HR concrete, at least 5 1/2" (140mm) thick, with a compressive strength of 3,000 psi (211kg/cm).
- To calculate the overall length of a Super Erecta Top Track System, add the following: Nominal track length + Nominal widths of each end unit + 1.5" (38mm).

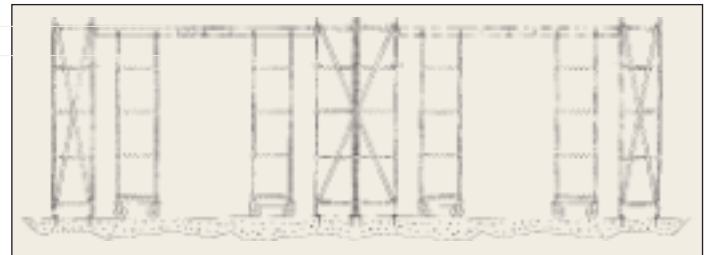

Double-Length System

Add track sets and mobile unit kits, refer to page 116.


See page 120 for Stationary Seismic shelving.

### Notes:

- Floor anchors are not included. The structural engineer of record must verify that the anchorage bolt and building structure are adequate for the applied load.
- For Seismic Top-Track, the highest load shelf must be no more than 60" (1524mm) from the floor.
- For Seismic Top-Track, a unit must have no more than four loaded shelves within 60" (1524mm) height.
- If a fifth shelf is used, it must serve only as a cover and not be used for load bearing.
- Each shelving unit, whether single or "back-to-back," cannot connect to other shelving units or walls.

### Top-Track® Floor Pad Protectors — {9.29} {11.12}

Use for both MetroMax Top-Track and Super Erecta Top-Track Systems.



Top-Track® Floor Protectors

For Track Length (ft.)	(mm)	Cat. No.	For Track Length (ft.)	(mm)	Cat. No.
6	1828	FPS6N	14	4267	FPS14N
7	2135	FPS7N	15	4572	FPS15N
8	2440	FPS8N	16	4877	FPS16N
9	2743	FPS9N	17	5182	FPS17N
10	3048	FPS10N	18	5486	FPS18N
11	3353	FPS11N	19	5791	FPS19N
12	3657	FPS12N	20	6096	FPS20N
13	3962	FPS13N	21	6400	FPS21N



Top-Track® Wall Mount Bracket

### Top-Track® Wall Mount Bracket — {11.12}

Used to attach one set of tracks to the wall. Eliminates the need for a stationary end unit. Includes one pair of wall brackets and hardware to attach tracks to the wall brackets. Hardware to attach the wall brackets to the wall is NOT included.

Cat. No. TTWM



Top-Track® Stop Plate Kit

### Top-Track® Stop Plate Kit — {11.12}

Used in conjunction with the Wall Mount Bracket Kit. The stop plates bolt to the underside of the track next to the wall brackets to prevent the mobile units from bumping into the wall.

Cat. No. TTSTP

#### Metro Tip:

Floorpad protectors compensate for soft flooring materials by protecting the floor from wear and tear. For new construction projects, it is recommended that flooring of suitable durability is used in areas where Top-Track will be installed.



qwikTRAK Stop Plate Kit

### qwikTRAK Stop Plate Kit — {11.15}

Eliminates the need for a stationary end unit. The kit contains two "L-shaped" stop plates that mount to the ends of the floor tracks. The stop plates prevent a mobile unit from rolling off the end of the tracks.

Cat. No. BTSP

Consult your Metro representative for guidance on configuring a qwikTRAK system using this kit.

Stop plates (kit of two) shown mounted to the end plates on the floor tracks.

# EFFICIENCY IS ON THE RISE

Short on  
floor space?  
Try going  
vertical.



## Super Erecta® Hi-Rise Shelving — {10.17}

- For light-duty storage applications where floor space is at a premium.
- Construct shelving up to 24 feet (7315mm) high — 3 times the height of conventional shelving
- Metro's computerized engineering system assures correct specifications and load rating of Hi-Rise materials for your application.

All Hi-Rise installations must be reviewed and approved by Metro Engineering. Hi-Rise certification plate supplied. Only Super Erecta and Super Adjustable Super Erecta wire shelves (found on pages 37 ) can be used in Hi-Rise applications. Contact Metro customer service or your local Metro representative for details.

### Metro Tip:

One frequently overlooked opportunity to gain additional storage capacity is the efficient use of vertical space. By connecting Super Erecta posts, storage areas may be created that utilize every available cubic foot of unused vertical air space.

Material part numbers will be provided by Metro Product Development upon review of application.

Super Erecta Hi-Rise Shelving

## Seismic Shelving Systems

Super Erecta® (SES), Super Adjustable Super Erecta® (SASE), qwikSLOT® (QS), HD Super® (HD), MetroMax® Q (Q)

### Seismic Bolt Plates Kits:

For 1" (25mm) diameter, Super Erecta Shelf, Super Adjustable Super Erecta, qwikSLOT stationary post assemblies. Kit includes plate assemblies and hardware to mount plates to posts. Floor anchors are not included.

Description	Qty.	Dimensions (Width/Length/Height) (in.) (mm)		Cat. No.
One-Post Bolt Plate, 1/4" (6mm)	4	2'10" x 7' x 1/4"	73x178x6	<b>SASES25BP-1</b>
Two-Post Bolt Plate, 1/4" (6mm)	2	2'10" x 11' x 1/4"	73x279x6	<b>SASES25BP-2</b>
Four-Post Bolt Plate, 1/4" (6mm)	1	2'10" x 11' x 1/4"	73x279x6	<b>SASES25BP-4</b>
One-Post Bolt Plate, 1/2" (13mm)	4	7' x 7' x 1/2"	178x178x13	<b>SASES50BP-1</b>
Two-Post Bolt Plate, 1/2" (13mm)	2	7' x 12' x 1/2"	178x305x13	<b>SASES50BP-2</b>
Four-Post Bolt Plate, 1/2" (13mm)	1	7' x 12' x 1/2"	178x305x13	<b>SASES50BP-4</b>


For 1.5" (38mm) diameter HD and trilobal Q stationary post assemblies. Kit includes plates and hardware to mount plates to posts. Floor anchors are not included.

Description	Qty.	Dimensions (Width/Length/Height) (in.) (mm)		Cat. No.
One-Post Bolt Plate, 1/4" (6mm)	4	2'10" x 7' x 1/4"	73x178x6	<b>SAQHD25BP-1</b>
Two-Post Bolt Plate, 1/4" (6mm)	2	2'10" x 11' x 1/4"	73x279x6	<b>SAQHD25BP-2</b>
Four-Post Bolt Plate, 1/4" (6mm)	1	2'10" x 11' x 1/4"	73x279x6	<b>SAQHD25BP-4</b>
One-Post Bolt Plate, 1/2" (13mm)	4	7' x 7' x 1/2"	178x178x13	<b>SAQHD50BP-1</b>
Two-Post Bolt Plate, 1/2" (13mm)	2	7' x 12' x 1/2"	178x305x13	<b>SAQHD50BP-2</b>
Four-Post Bolt Plate, 1/2" (13mm)	1	7' x 12' x 1/2"	178x305x13	<b>SAQHD50BP-4</b>


### Required Components:

For seismic requirements, simply add floor bolt-plates to standard Metro stationary shelving configurations and follow the installation and usage guidelines. Just add floor plates


**Example A**  
Requires one 1-post starter kit.  
(ie. SASES25BP-1).

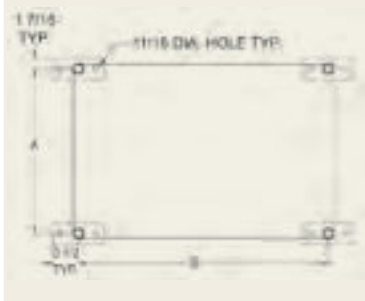

**Example B**  
Requires one starter kit, (ie. SASES25BP-1) and one 2-post adder kit, (ie. SASES25BP-2). Include one additional adder kit for each subsequent shelving unit added to the run.

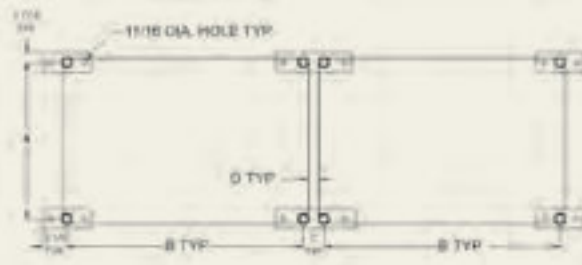

**Example C**  
Requires one 1-post starter kit, (ie. SASES25BP-1), two 2-post adder kits (ie. SASES25BP-2), and one 4-post adder kit, (ie. SASES25BP-4). Include one of each adder kit, (ie. one 2-post kit and one 4-post kit), for each additional pair of shelving units.

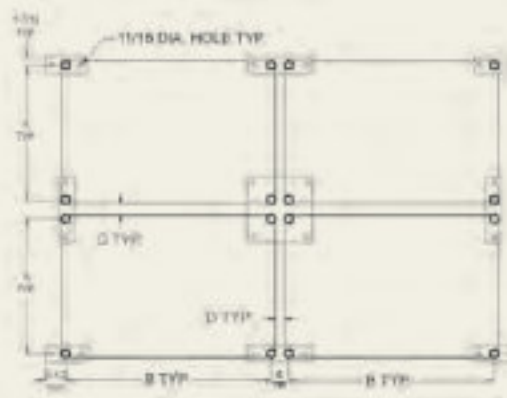


**For the latest seismic information visit [metro.com/seismic](http://metro.com/seismic)**




## Super Adjustable® Super Erecta, Super Erecta®, qwikSLOT®



SASES25BP-1

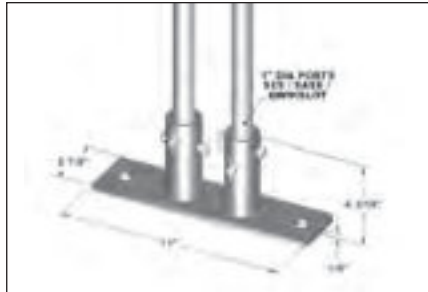

SASES25BP-2

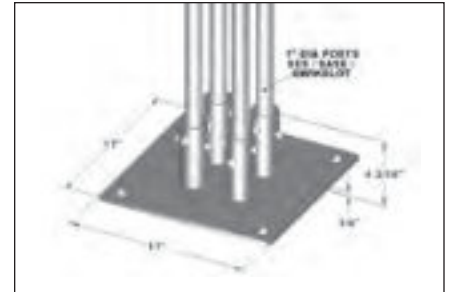

SASES25BP-4



SASES50BP-1



SASES50BP-2



SASES50BP-4

Hint: It is recommended that a donut bumper be specified to cover any spaces between the post and the bolt plate anchor pipe. Specify the donut bumper to match the post type.




Super Erecta, Super Adjustable Super Erecta, qwikSLOT = 9992DB  
Super Erecta Shelf HD = 9992H  
MetroMax Q = 9992DBX


## MetroMax® Q/HD Super




SAQHDS25BP-1

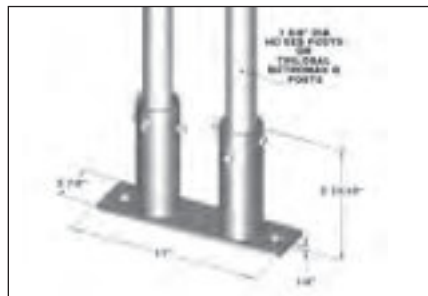

SAQHD25BP-2

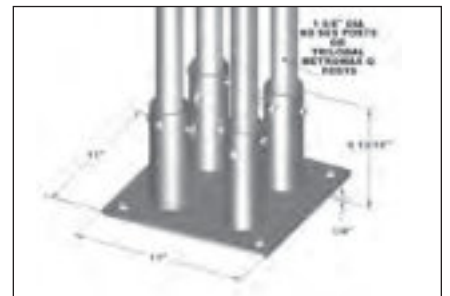


SAQHD25BP-4

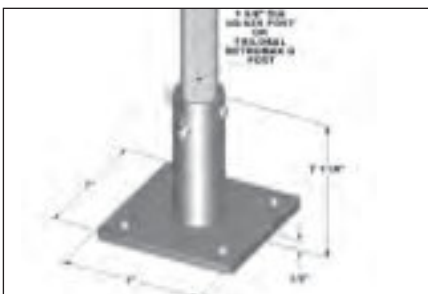

SAQHD50BP-1



SAQHD50BP-2

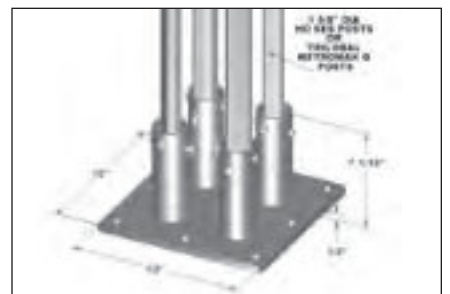

SAQHD50BP-4

A close-up photograph of a beige Metro storage unit. A metal rod with a series of horizontal ridges is visible, passing through a hole in the unit. A red logo with the word "METRO" in white is visible on the unit. The text "Move, store & secure what matters most." is overlaid in white.

Move,  
store &  
secure  
what  
matters  
most.

myCart Series®  
myFold™  
Deep Ledge

# UTILITY CARTS, DUNNAGE & SECURITY

Polymer Utility Carts .....	124-127
Wire & Solid Utility Carts .....	128-129
Dunnage Racks & Shelves .....	130-131
Security Storage .....	132-137

# It's myCart, get your own.



PROTECTION THAT LIVES ON  
**MICROBAN**



## Better Containment!


Ship's edge retains small spills and prevents items from sliding off during transport.



**Make it yours.**

# myCart

Utility Cart

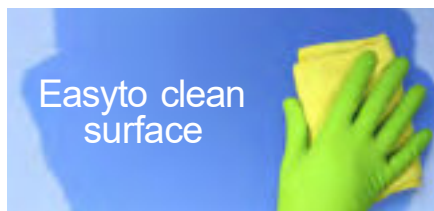


Easy to clean surface

Corrosion proof & impact resistant polymer shelves.

## Easy & Useful

Easy-grip handle and roomy utility tray

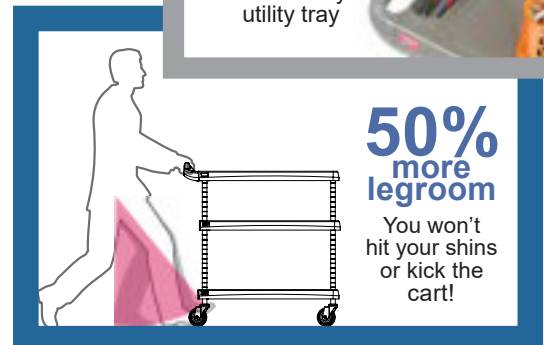

**50% more legroom**

You won't hit your shins or kick the cart!

## Cleanable

- > NSF Listed.
- > Smooth surfaces easily wipe clean and won't stain.
- > Specific models available with Microban® Antimicrobial product protection.

## Durable

- > Corrosion proof, impact resistant shelves are designed to withstand daily abuse.
- > Sturdy construction: 300lb. (136kg), 400lb. (181kg), and 500lb. (227kg) capacity models available.

## User Friendly

- > Additional legroom puts more distance between the shelves and you. You can push the cart more freely without hitting your shins and feet off the cart.
- > Right-sized for common containers and racks.
- > Large covered utility tray organizes small items and easily wipes clean.
- > Easy-grip handle and four swivel casters ensure easy maneuvering.
- > Each cart comes with two personalization labels for easy identification.





## Foodservice

Allergen Free Zone myCart!  
Help control cross-contact and protect your customers by using this cart to prep/transport food for allergen sensitive customers.

## Healthcare

A unique color to help distinguish specific products or applications. A cool color with nurturing qualities for departments like pediatrics, labor and delivery.

## Grocery

Ideal for storing and transporting items that are required to be kept separate from other items, such as organics.

## myCart Series® — {12.29}

- > Available in 2-shelf and 3-shelf configurations.
- > 7/16" (11mm) deep ship's edge lip around shelf perimeter.
- > MY1627 and MY2030 Base Model specs: Chrome posts, 4" (102mm) non-marking swivel casters. 150 lbs. (68kg) capacity per shelf.
- > MY2636 Base Model specs: Chrome posts, 5" (127mm) swivel resilient rubber casters, 200 lbs. (90kg) capacity per shelf.

Purple

Gray

Black

Blue

**MICROBAN**  
with Microban antimicrobial product protection

## Carts

Width/Length/Height (in.)	Width/Length/Height (mm)	Description	Load Rating Per Cart (lbs.) (kg)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Gray	Cat. No. Black	Cat. No. Blue with Antimicrobial	Cat. No. Purple
18 <sup>5</sup> / <sub>16</sub> x31 <sup>1</sup> / <sub>2</sub> x35 <sup>1</sup> / <sub>2</sub>	465x800x902	2-shelf base model	300 136	28.5 12.9	MY1627-24G	MY1627-24BL	MY1627-24BU	—
18 <sup>5</sup> / <sub>16</sub> x31 <sup>1</sup> / <sub>2</sub> x35 <sup>1</sup> / <sub>2</sub>	465x800x902	3-shelf base model	400 181	34 15.4	MY1627-34G	MY1627-34BL	MY1627-34BU	—
23 <sup>7</sup> / <sub>16</sub> x34 <sup>3</sup> / <sub>8</sub> x35 <sup>1</sup> / <sub>2</sub>	595x873x902	2-shelf base model	300 136	33 15	MY2030-24G	MY2030-24BL	MY2030-24BU	MY2030-24AP
23 <sup>7</sup> / <sub>16</sub> x34 <sup>3</sup> / <sub>8</sub> x35 <sup>1</sup> / <sub>2</sub>	595x873x902	3-shelf base model	400 181	41.5 19	MY2030-34G	MY2030-34BL	MY2030-34BU	MY2030-34AP
27 <sup>1</sup> / <sub>16</sub> x40 <sup>1</sup> / <sub>4</sub> x36 <sup>7</sup> / <sub>8</sub>	703x1022x937	2-shelf base model	400 181	40 18.1	MY2636-25G	MY2636-25BL	MY2636-25BU	—
27 <sup>1</sup> / <sub>16</sub> x40 <sup>1</sup> / <sub>4</sub> x36 <sup>7</sup> / <sub>8</sub>	703x1022x937	3-shelf base model	500 227	51 23.1	MY2636-35G	MY2636-35BL	MY2636-35BU	—

## Accessories

- > Utility bin and wastebasket can be easily removed from their holders to empty contents or for routine cleaning.

Width/Height/Depth (in.)	Width/Height/Depth (mm)	Description	Fits Cart	Load Rating (lbs.) (kg)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
17 <sup>7</sup> / <sub>8</sub> x16 <sup>1</sup> / <sub>4</sub> x14 <sup>3</sup> / <sub>4</sub>	454x413x375	Wastebasket + Holder	MY1627	25 11.3	5.7 2.5	MYWB1
23x16 <sup>1</sup> / <sub>4</sub> x14 <sup>3</sup> / <sub>4</sub>	584x413x375	Wastebasket + Holder	MY2030	25 11.3	5.8 2.6	MYWB2
14 <sup>3</sup> / <sub>8</sub> x15 <sup>3</sup> / <sub>8</sub> x10 <sup>3</sup> / <sub>8</sub>	365x391x264	Wastebasket Only			2.8 1.3	MF222
17 <sup>3</sup> / <sub>8</sub> x7x15 <sup>1</sup> / <sub>4</sub>	454x178x387	Utility Bin + Holder	MY1627	25 11.3	5 2.2	MYUB1
23x7x15 <sup>1</sup> / <sub>4</sub>	584x178x387	Utility Bin + Holder	MY2030	25 11.3	5.1 2.3	MYUB2
16 <sup>3</sup> / <sub>8</sub> x6x11	416x152x279	Utility Bin Only			2 0.9	UB1



Wastebasket and Holder



Utility Bin and Holder

## Personalization Labels

Personalization labels provide easy identification

- > Constructed of polyester material with a clear polyester flap to protect written information from wiping off.

4<sup>3</sup>/<sub>5</sub>" L x 7<sup>7</sup>/<sub>8</sub>" H (117.5x22.4mm)

Cat. No. MYCARTLBL-10PK Pack of 10

## Replacement Casters

4" (102mm) non-marking swivel caster. Used with MY1627 and MY2030 models.

Cat. No. RPBC4M-4 Bag of 4

5" (127mm) swivel resilient rubber caster. Used with MY2636 models.

Cat. No. 5M, sold individually.



MY1627

**Easy-grip handle and utility tray**

- > Small footprint for tight spaces.
- > Accommodates Metro tote boxes and ISOtotes.



MY2030

**MY2030 cart handle has built-in recessed support channel to manage odd shaped items.**

- > Right-sized to fit : Glass & dish racks, bussing totes, silverware bins, milk crates.



MY2636

**MY2636 cart handle has a built-in slot to hold scanners and labels.**

- > Ideal for large bulky items. 5" (127mm) Caster makes cart easy to maneuver. 3-shelf model holds up to 500 lbs.

Indicates antimicrobial product.



# My cart folds... does yours?

fold.



unfold.



## myFold

Utility Cart

### myFold Utility Cart — {12.27}

- > One hand folding to 8" (203mm) wide 41" (1041mm) tall for easy storage
- > Ships fully assembled
- > Base Model specs: 3 polymer shelves, Stainless steel posts, 4" (102mm) non-marking swivel casters (2) with brake.
- > Holds 117 lbs. (53kg) per shelf. 350 lbs. (159kg) total capacity

Width/Length/Height (in.)	(mm)	Description	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Black
16.5x28.9x35.8	420x735x910	3-shelf folding cart	32.4 15.5	FC1627-34BL

### Fold it.

Pack it up and take it with you.  
Perfect for off-site locations or  
storing in tight spaces.

### Move it.

350lb. Total Cart Capacity. 2-Swivel and  
2-Swivel/Brake non-marking casters.  
Easygrip handles on both sides.

## Deep Ledge Utility Carts — {12.28} NSF

Specially designed with a 2<sup>3</sup>/<sub>4</sub>" (70mm) deep ledge to contain product and spills.

- Polymer shelves are easy to clean and corrosion proof.
- Available colors are gray, black, and blue. Blue contains Microban antimicrobial product protection.
- Available in 2-shelf and 3-shelf models.
- Center shelf option adjusts at 1" (25mm) increments.

Width/Length/Height (in.)	Width/Length/Height (mm)	Description	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.*	Cat. No. Slate Blue with Microban
21 <sup>1</sup> / <sub>2</sub> x33 <sup>3</sup> / <sub>4</sub> x33 <sup>1</sup> / <sub>4</sub>	546x857x845	2-shelf unit	29 31.1	BC2030-2D	BC2030-2DMB
21 <sup>1</sup> / <sub>2</sub> x33 <sup>3</sup> / <sub>4</sub> x33 <sup>1</sup> / <sub>4</sub>	546x857x845	3-shelf unit	37 <sup>1</sup> / <sub>2</sub> 17.0	BC2030-3D	BC2030-3DMB
27x39 <sup>1</sup> / <sub>2</sub> x33 <sup>1</sup> / <sub>4</sub>	685x1003x845	2-shelf unit	35 15.9	BC2636-2D	BC2636-2DMB
27x39 <sup>1</sup> / <sub>2</sub> x33 <sup>1</sup> / <sub>4</sub>	685x1003x845	3-shelf unit	46 <sup>1</sup> / <sub>2</sub> 21.1	BC2636-3D	BC2636-3DMB

\*Add color designation to part number when ordering: Gray (G), Black (BL).  
Example: BC2030-3DG = 3-shelf gray cart.



Weight load capacity for  
Deep Ledge series.

150 lbs. (68kg) per shelf.

2-shelf model: 300 lbs. (136kg)

3-shelf model: 400 lbs. (181kg)

Gray

Black

Blue

PROTECTION THAT LIVES ON  
**MICROBAN**  
with Microban antimicrobial  
product protection

## Accessories and Replacement Casters — {12.28}

- Utility Bin and Wastebasket can be easily removed from the holders to empty contents or for routine cleaning.

Description	Fits Cart	Width/Height/Depth (in.)	Width/Height/Depth (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Deep Ledge Cat. No.
Wastebasket + Holder	BC2030	21 <sup>1</sup> / <sub>4</sub> x27 <sup>1</sup> / <sub>2</sub> x13 <sup>1</sup> / <sub>4</sub>	540x700x337	8.0 3.8	BCWB2D
Utility Bin + Holder	BC2030	21 <sup>1</sup> / <sub>4</sub> x7 <sup>3</sup> / <sub>4</sub> x14 <sup>1</sup> / <sub>2</sub>	540x197x368	6.0 2.7	BCUB2D
Wastebasket Only		14 <sup>3</sup> / <sub>8</sub> x15 <sup>3</sup> / <sub>8</sub> x10 <sup>3</sup> / <sub>8</sub>	365x391x264	2.8 1.3	MF222
Utility Bin Only		16 <sup>3</sup> / <sub>8</sub> x6x11	416x152x279	2.0 0.9	UB1
Replacement Caster Kit — All					RPBC4M-4

**Note:** Caster kit contains four 4" (102mm) swivel casters.



## Basket Cart NSF

Includes two light-duty basket style shelves, one standard wire shelf, four posts, extended handle, and four 4" diameter swivel casters (two with brakes).

- Basket shelves have a 3<sup>1</sup>/<sub>2</sub>" (89mm) high edge to secure contents during transport.
- Durable chrome finish
- 400 lbs. (182kg) capacity per cart; 150 lbs. (68kg) capacity per shelf
- Ships in one box



\*Cart comes in white point-of-sale box

Shelf Width/Length (in.)	Shelf Width/Length (mm)	Overall Length (including handle) (in.)	Overall Length (including handle) (mm)	Overall Height (in.)	Overall Height (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
18x36	457x914	39 <sup>7</sup> / <sub>8</sub>	1013	40 <sup>1</sup> / <sub>8</sub>	1020	49 22	BASCART-SR



MW200 Series



MW400 Series



MW600 Series



MW700 Series

## MW Series Utility Carts — {12.01}{12.05} NSF

- Consist of Super Erecta wire shelves with plastic split sleeves, two one-piece handles of matching finish, and designated casters with donut bumpers.
- Two- and three-tier models available.
- 375 lbs. (170kg) weight capacity per cart. MW carts use light-duty resilient casters.
- 18" (457mm) wide carts have 4" (102mm) casters. Cart is 38" (965mm) high.
- 21" and 24" (530 and 610mm) wide carts have 5" (127mm) casters. Cart is 39" (990mm) high.

### Utility Carts with Stainless Steel Solid Shelves

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. 2-Shelf	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. 3-Shelf
18x24	457x610	40	18.1	<b>MW103</b>	48	21.8	<b>MW203</b>
18x30	457x760	45	20.4	<b>MW104</b>	53	24.0	<b>MW204</b>
18x36	457x914	48	21.8	<b>MW105</b>	59	26.8	<b>MW205</b>
21x36	530x914	54	24.5	<b>MW106</b>	74	33.6	<b>MW206</b>
24x36	610x914	60	27.2	<b>MW108</b>	66	29.9	<b>MW208</b>

### Utility Carts with 1 Solid, 2 Wire Shelves

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Shelf Material	Handles	Cat. No.
18x24	457x610	43	19.5	Stainless Steel, Chrome	Chrome	<b>MW401</b>
18x30	457x760	47	21.3	Stainless Steel, Chrome	Chrome	<b>MW402</b>
18x36	457x914	52	23.6	Stainless Steel, Chrome	Chrome	<b>MW403</b>
21x36	530x914	59	26.8	Stainless Steel, Chrome	Chrome	<b>MW404</b>
24x36	610x914	65	29.5	Stainless Steel, Chrome	Chrome	<b>MW406</b>

### Utility Carts with 2 Wire Shelves

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Shelf Material	Handles	Cat. No.
18x24	457x610	34	15.4	Chrome	Chrome	<b>MW601</b>
18x24	457x610	34	15.4	Stainless Steel	Stainless Steel	<b>MW602</b>
18x30	457x760	37	16.8	Chrome	Chrome	<b>MW603</b>
18x30	457x760	37	16.8	Stainless Steel	Stainless Steel	<b>MW604</b>
18x36	457x914	40	18.1	Chrome	Chrome	<b>MW605</b>
18x36	457x914	39	17.7	Stainless Steel	Stainless Steel	<b>MW606</b>
21x36	530x914	44	20.0	Chrome	Chrome	<b>MW607</b>
21x36	530x914	44	20.0	Stainless Steel	Stainless Steel	<b>MW608</b>
24x36	610x914	47	21.3	Chrome	Chrome	<b>MW611</b>
24x36	610x914	46	20.9	Stainless Steel	Stainless Steel	<b>MW612</b>

### Utility Carts with 3 Wire Shelves

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Shelf Material	Handles	Cat. No.
18x24	457x610	39	17.6	Chrome	Chrome	<b>MW701</b>
18x24	457x610	38	17.2	Stainless Steel	Stainless Steel	<b>MW702</b>
18x30	457x760	43	19.5	Chrome	Chrome	<b>MW703</b>
18x30	457x760	42	19.1	Stainless Steel	Stainless Steel	<b>MW704</b>
18x36	457x914	47	21.3	Chrome	Chrome	<b>MW705</b>
18x36	457x914	45	20.4	Stainless Steel	Stainless Steel	<b>MW706</b>
21x36	530x914	50	22.7	Chrome	Chrome	<b>MW707</b>
21x36	530x914	50	22.7	Stainless Steel	Stainless Steel	<b>MW708</b>
24x36	610x914	60	27.7	Chrome	Chrome	<b>MW711</b>
24x36	610x914	57	25.9	Stainless Steel	Stainless Steel	<b>MW712</b>



## SP Series Utility Carts — {12.10} NSF

- Consist of SuperErecta wire shelves with plastic split sleeves, two one-piece handles of matching finish, and designated casters with donut bumpers.
- Two- and three-tier models available.
- 5" (127mm) casters allow for transport of heavier loads than the MW Series Carts.
- 39" (990mm) high.

### Super Erecta Brite finish — 600 lbs. (273kg) capacity per cart

- 5M Resilient Rubber Casters; casters have plated horns and axles.

Shelf Width/Length (in.) (mm)	2-TIER MODELS		3-TIER MODELS	
	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Brite	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Super Erecta Brite
18x36 457x914	40 18	2SPN33ABR	50 22.5	3SPN33ABR
21x36 530x914	44 20	2SPN43ABR	55 24.7	3SPN43ABR
24x36 610x914	48 22	2SPN53ABR	61 27.4	3SPN53ABR
24x48 610x1219	54 24	2SPN55ABR	70 31.5	3SPN55ABR
24x60 610x1524	64 29	2SPN56ABR	85 38.2	3SPN56ABR



2-Tier with 5M casters



3-Tier with 5M casters

### Chrome finish — 900 lbs. (410kg) capacity per cart

- 5MP Polyurethane Casters; casters have plated horns and axles.

Shelf Width/Length (in.) (mm)	2-TIER MODELS		3-TIER MODELS	
	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome
18x36 457x914	40 18	2SPN33DC	50 22.5	3SPN33DC
21x36 530x914	44 20	2SPN43DC	55 24.7	3SPN43DC
24x36 610x914	48 22	2SPN53DC	61 27.4	3SPN53DC
24x48 610x1219	54 24	2SPN55DC	70 31.5	3SPN55DC
24x60 610x1524	64 29	2SPN56DC	85 38.2	3SPN56DC



3-Tier with 5PC casters

### Type 304 Stainless Steel — 900 lbs. (410kg) capacity per cart

- 5PC Polyurethane Casters; casters have polymer horns and stainless steel axles.

Shelf Width/Length (in.) (mm)	2-TIER MODELS		3-TIER MODELS	
	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stainless Steel	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stainless Steel
18x36 457x914	40 18	2SPN33PS	50 22.5	3SPN33PS
21x36 530x914	44 20	2SPN43PS	55 24.7	3SPN43PS
24x36 610x914	48 22	2SPN53PS	61 27.4	3SPN53PS
24x48 610x1219	54 24	2SPN55PS	70 31.5	3SPN55PS
24x60 610x1524	64 29	2SPN56PS	85 38.2	3SPN56PS



One-Piece Handle

## One-Piece Handles — {12.10}

May be used with Super Erecta shelving, casters, and components to customize a cart to your exact needs.

Shelf Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Stainless Steel
18 457	5 1/2 2.5	H3C	H3S
21 533	5 3/4 2.6	H4C	H4S
24 610	6 2.7	H5C	H5S

Height: 34 1/2" (876mm).



# Off-the-floor efficiency.



Bow-Tie Dunnage Rack



Standard racks joined in "end-to-end" configuration.

### Bow-Tie™ Dunnage Racks — {9.09}

12" (305mm) high; 22" (559mm) wide.

- Metro Bow-Tie Dunnage Racks are available with built-in Microban® antimicrobial product protection to protect from bacteria, mold, mildew and fungi that cause odors, stains and product degradation. Standard models, without Microban, are also available.
- Rust and corrosion-proof polymer material.
- Helps protect floors: legs have a larger radius than traditional dunnage racks and distribute the storage load across a wider area.
- Racks join together easily without tools in "end-to-end" and "back-to-back" configurations with the exclusive Bow-Tie™ feature.
- Heavy-duty construction gives racks the strength to hold up to 1,500 lbs. (683kg) for 30" (760mm) and 36" (914mm) long racks, and 3,000 (1365kg) for 48" (1219mm) and 60" (1524mm) racks.

Length (in.) (mm)		Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Capacity (lbs.) (kg)		Cat. No. Microban®	Cat. No. Standard
30	760	12	305	24	10.8	1500	68	HP2230PDMB	HP2230PD
36	914	12	305	26	11.7	1500	68	HP2236PDMB	HP2236PD
48	1219	12	305	34	15.3	3000	136	HP2248PDMB	HP2248PD
60	1524	12	305	42		3000	136	HP2260PDMB	HP2260PD

Indicates antimicrobial product.

## Dunnage Platforms (Standard Duty) — {10.44}

Space-saving platforms let you keep bulky items off the floor.

- Open wire provides air circulation and minimizes dust.
- All platforms use 13Por 13PS posts—height 14<sup>5</sup>/<sub>8</sub>" (371mm) including cap and leveling bolt.

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Stainless
18x24	457x610	11	5.0	P1824BR	P1824NC	P1824NS
18x30	457x760	12	5.5	P1830BR	P1830NC	P1830NS
18x36	457x914	13 <sup>1</sup> / <sub>2</sub>	6.1	P1836BR	P1836NC	P1836NS
21x24	530x610	12	5.5	P2124BR	P2124NC	P2124NS
21x30	530x760	13	5.9	P2130BR	P2130NC	P2130NS
21x36	530x914	15	6.8	P2136BR	P2136NC	P2136NS
24x24	610x610	13	5.9	P2424BR	P2424NC	P2424NS
24x30	610x760	15	6.8	P2430BR	P2430NC	P2430NS
24x36	610x914	17	7.7	P2436BR	P2436NC	P2436NS



Super Erecta Platform

## Heavy-Duty Dunnage Racks — {10.46}

A space-efficient way to store large, bulky items off the floor.

- Removable top mat lifts off for cleaning.
- Dunnage racks are 14<sup>1</sup>/<sub>2</sub>" (368mm) high including mat, cap and leveling bolt.

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
18x24	457x610	22	10	HP31C	HP31K3	
18x30	457x760	25	11	HP32C	HP32K3	
18x36	457x914	30	13	HP33C	HP33K3	HP33S
18x48	457x1219	38	17	HP35C*	HP35K3*	HP35S*
24x24	610x610	28	12	HP51C	HP51K3	
24x30	610x760	30	14	HP52C	HP52K3	
24x36	610x914	36	16	HP53C	HP53K3	HP53S
24x48	610x1219	42	19	HP55C*	HP55K3*	HP55S*



Dunnage Rack with Mat

**Note:** Maximum distributed static load capacity for stationary dunnage racks is 1,600 lbs. (725kg), except on units marked \* which have a 1,300 lb. (590kg) capacity.

## Mobile Dunnage Racks (Heavy Duty) — {10.46}

These easy-to-manuever racks feature two swivel and two swivel/brake casters; with non-marking polyurethane tread.

- Support frames: 1" (25mm) square tubing.
- Removable wire mat: 5/16" (7.9mm) diameter wire.

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
18x36	457x914	42	18.9	MHP33C	MHP33K3	MHP33S
18x48	457x1219	50	22.5	MHP35C	MHP35K3	MHP35S
24x36	610x914	48	21.6	MHP53C	MHP53K3	MHP53S
24x48	610x1219	54	24.3	MHP55C	MHP55K3	MHP55S



Mobile Dunnage Rack shown in Metroseal 3 finish

Maximum distributed static load capacity is 800 lbs. (363kg).

**Note:** These units are designed for only the 5HP and 5HPB casters, which are shipped assembled with the special posts.

## HD Super Duty Dunnage Racks — {10.68}

Stores more than a ton safely off the floor.

- 48" (1219mm) rack has a 3,000 pound (1361kg) static load capacity (uniformly distributed); 60" (1524mm) rack carries up to 2,400 pounds (1089kg).
- HD Super™ design features fast, secure assembly without tools.
- Posts of 1<sup>5</sup>/<sub>8</sub>" (41mm) diameter provide greater rigidity.
- HD Super™ Dunnage Racks are 16<sup>1</sup>/<sub>4</sub>" (413mm) high including cap and leveling bolt.

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless
18x48	457x1219	52	23.4	HDP35C	HDP35K3	HDP35S
18x60	457x1524	62	27.9	HDP36C	HDP36K3	HDP36S
24x48	610x1219	57	26.6	HDP55C	HDP55K3	HDP55S
24x60	610x1524	66	29.7	HDP56C	HDP56K3	HDP56S



HD Super Dunnage Rack

Maximum capacity 2,400 pounds (1089kg) uniformly distributed static load on the 60" (1524mm) length racks; 3,000 pounds (1361kg) on the 48" (1219mm) length racks.

**Note:** Capacity will be reduced and the unit will become less stable if the 3-sided frame is mounted higher than 6" (152mm) from the floor.



Indicates antimicrobial product.



# Keep'em out!

## Protect Valuables.

Keeps sensitive items from loss or pilferage.

## Visible, yet Safe.

ReadyView of Contents: Heavy-gauge open wire construction keeps contents visible at all times, making it easy to check inventory.

### Security Units — {14.01}

- Optional Adjustable Intermediate Shelves: Patented easily adjustable shelf designs — Super Adjustable Super Erecta, MetroMax Q, and qwikSLOT—allow flexibility to meet changing needs. Can be positioned in 1" (25mm) increments along the entire height of post.
- Double Door: Each door opens 270 degrees and can be secured along the sides of the unit.
- Shipped Knocked-Down: Saves on freight costs. Easily assembled.








MetroMax Q  
Security Unit









Super Adjustable  
Super Erecta Security Unit



## Ordering Guide for Security Units

	Dry Environments		Wet Environments		
<div>FIRST</div> <div>Choose the right finish &amp; shelving style based upon usage and enviromnent and/ or cleaning methods.</div>					
	Super Erecta Chrome Finish	qwikSLOT Chrome Finish	Super Erecta Metroseal 3 Finish	MetroMax Q Rust Resistant Polymer & Coated Wire	Super Erecta Type 304 Stainless Steel Finish
	Corrosion Protection >	-	-	Corrosion Resistant	Corrosion Resistant
NSF listed >	YES	NO	YES	YES	YES

<div>NEXT</div> <div>Choose from stationary and mobile options.</div>	Stationary >		Stationary >		Stationary >
	8 Models		5 Models		5 Models
	Mobile >		Mobile >		Mobile >
<div>Medium-Duty</div> <div>Recommended security models with stem casters</div>					<div>SD Models</div> <div>Casters are not provided with stainless Steel Standard Duty Stem Caster base models. Casters are sold separately.</div>
	DC & EC Models Include Casters with zinc-plated horns	DC & EC Models Include Casters with zinc-plated horns	VK3 Models Include Casters with polymer horns	VE Models Include Casters with polymer horns	
<div>Heavy-Duty</div> <div>Best addressed with dolly bases. Recommended when cart will be frequently moved over long distances, between facilities, over thresholds. Super Erecta units best fit this application.</div>	Mobile >		Mobile >		<div>S-HD Models</div> <div>Dollies and plate casters are NOT provided with the heavy-duty stainless steel base models. Dollies and plate casters are sold separately.</div>
					
	LC Models Dollies/casters included.	LCQ Models Dollies/casters included.	LK3 Models Dollies/casters included.	LE Models Dollies/casters included.	

<div>LAST</div> <div>Select Intermediate shelves. Shelves are not included with base models.</div>
--



SEC55C shown with optional SuperAdjustable intermediate shelves.

## Super Erecta® Shelf Stationary Security — {14.01}

66<sup>13</sup>/<sub>16</sub>" (1695mm) high

Intermediate shelves are not included with base models and must be ordered separately. See page 105 for intermediate shelf options.

Width (in.) (mm)	Length (in.) (mm)	Fits Shelf (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel
21 <sup>1</sup> / <sub>2</sub> 546	38 <sup>1</sup> / <sub>2</sub> 980	18x36 457x914	138 63	SEC33C	SEC33K3	SEC33S
21 <sup>1</sup> / <sub>2</sub> 546	50 <sup>1</sup> / <sub>2</sub> 1295	18x48 457x1219	157 71	SEC35C	SEC35K3	SEC35S
27 <sup>1</sup> / <sub>4</sub> 692	38 <sup>1</sup> / <sub>2</sub> 980	24x36 610x914	154 70	SEC53C	SEC53K3	SEC53S
27 <sup>1</sup> / <sub>4</sub> 692	50 <sup>1</sup> / <sub>2</sub> 1295	24x48 610x1219	174 79	SEC55C	SEC55K3	SEC55S
27 <sup>1</sup> / <sub>4</sub> 692	62 <sup>1</sup> / <sub>2</sub> 1587	24x60 610x1524	195 89	SEC56C	SEC56K3	SEC56S
33 <sup>1</sup> / <sub>2</sub> 851	38 <sup>1</sup> / <sub>2</sub> 980	30x36 760x914	167 76	SEC63C		SEC63S
33 <sup>1</sup> / <sub>2</sub> 851	50 <sup>1</sup> / <sub>2</sub> 1295	30x48 760x1219	193 88	SEC65C		SEC65S
33 <sup>1</sup> / <sub>2</sub> 851	62 <sup>1</sup> / <sub>2</sub> 1587	30x60 760x1524	215 98	SEC66C		SEC66S



SEC55DC shown with optional SuperAdjustable intermediate shelves (sold separately). Doors rotate 270° and can be secured to the sides of the cart while contents are being loaded on the shelves.

## Super Erecta® Mobile Security — {14.01}

Standard-Duty Stem Caster Models — Chrome and Metroseal 3

Chrome and Metroseal 3 Standard-Duty Stem Caster Models include 5" (127mm) casters.

Intermediate shelves are not included with base models and must be ordered separately. See page 137 for intermediate shelf options.

Caster Type	Width (in.) (mm)	Length (in.) (mm)	Fits Shelf (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®
(2) 5MP/(2) 5MPB	21 <sup>1</sup> / <sub>2</sub> 546	40 <sup>3</sup> / <sub>4</sub> 1035	18x36 457x914	146 66	SEC33EC	SEC33EK3
(2) 5MP/(2) 5MPB	21 <sup>1</sup> / <sub>2</sub> 546	52 <sup>3</sup> / <sub>4</sub> 1340	18x48 457x1219	165 75	SEC35EC	SEC35EK3
(4) 5MP	27 <sup>1</sup> / <sub>4</sub> 692	40 <sup>3</sup> / <sub>4</sub> 1035	24x36 610x914	162 74	SEC53DC	SEC53DK3
(4) 5MP	27 <sup>1</sup> / <sub>4</sub> 692	52 <sup>3</sup> / <sub>4</sub> 1340	24x48 610x1219	182 83	SEC55DC	SEC55DK3
(4) 5MP	27 <sup>1</sup> / <sub>4</sub> 692	65 1651	24x60 610x1524	203 92	SEC56DC	SEC56DK3
(2) 5MP/5MPB	27 <sup>1</sup> / <sub>4</sub> 692	40 <sup>3</sup> / <sub>4</sub> 1035	24x36 610x914	162 74	SEC53EC	SEC53EK3
(2) 5MP/5MPB	27 <sup>1</sup> / <sub>4</sub> 692	52 <sup>3</sup> / <sub>4</sub> 1340	24x48 610x1219	182 83	SEC55EC	SEC55EK3
(2) 5MP/5MPB	27 <sup>1</sup> / <sub>4</sub> 692	65 1651	24x60 610x1524	203 92	SEC56EC	SEC56EK3
(2) 5PC/5PCB	27 <sup>1</sup> / <sub>4</sub> 692	40 <sup>3</sup> / <sub>4</sub> 1035	24x36 610x914	162 74		SEC53VK3
(2) 5PC/5PCB	27 <sup>1</sup> / <sub>4</sub> 692	52 <sup>3</sup> / <sub>4</sub> 1340	24x48 610x1219	182 83		SEC55VK3
(2) 5PC/5PCB	27 <sup>1</sup> / <sub>4</sub> 692	65 1651	24x60 610x1524	203 92		SEC56VK3
(2) 5MP/(2) 5MPB	33 <sup>1</sup> / <sub>2</sub> 851	40 <sup>3</sup> / <sub>4</sub> 1035	30x36 760x914	175 80	SEC63EC	
(2) 5MP/(2) 5MPB	33 <sup>1</sup> / <sub>2</sub> 851	52 <sup>3</sup> / <sub>4</sub> 1340	30x48 760x1219	202 92	SEC65EC	
(2) 5MP/(2) 5MPB	33 <sup>1</sup> / <sub>2</sub> 851	65 1651	30x60 760x1524	223 101	SEC66EC	

Casters: 5MP and 5MPB (with locking brake) feature a polyurethane tread. 5PC and 5PCB (with locking brake) casters feature a polymer horn and resist rusting. They are recommended for high moisture environments. Large casters can create a tipping hazard. On security units using 18" (457mm) deep shelving, do not use casters larger than 5" (127mm) in diameter. Overall height: Models with 5MP casters — 67<sup>15</sup>/<sub>16</sub>" (1726mm) high. Models with 5PC casters — 68<sup>7</sup>/<sub>16</sub>" (1739mm) high.



SEC55LC shown with optional SuperAdjustable intermediate shelves.

## Heavy-Duty Models — Chrome and Metroseal 3 — {14.01}

68<sup>7</sup>/<sub>16</sub>" (1739mm) high

Chrome and Metroseal 3 models feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

Caster Type	Width (in.) (mm)	Length (in.) (mm)	Fits Shelf (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®
(2) B5P/B5PB	28 <sup>1</sup> / <sub>16</sub> 713	38 <sup>1</sup> / <sub>2</sub> 980	24x36 610x914	187 85	SEC53LC	SEC53LK3
(2) B5P/B5PB	28 <sup>1</sup> / <sub>16</sub> 713	50 <sup>1</sup> / <sub>2</sub> 1285	24x48 610x1219	210 95	SEC55LC	SEC55LK3
(2) B5P/B5PB	28 <sup>1</sup> / <sub>16</sub> 713	63 <sup>1</sup> / <sub>8</sub> 1600	24x60 610x1524	235 107	SEC56LC	SEC56LK3



Note: Super Erecta Security Units are NSF listed.

## Standard-Duty Stem Caster Models — Stainless Steel — {14.01}

### 62" (1575mm) high

Casters must be ordered separately. See pages 50-51, or consult your Metro representative for the proper caster for your application. Intermediate shelves are not included with base models and must be ordered separately.

Description	Width (in.) (mm)	Length (in.) (mm)	Fits Shelf (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stainless Steel
Standard Duty	21 1/2 546	40 3/4 1035	18x36 457x914	138 63	SEC33S-SD
Standard Duty	21 1/2 546	52 3/4 1340	18x48 457x1219	157 71	SEC35S-SD
Standard Duty	27 1/4 692	40 3/4 1035	24x36 610x914	154 70	SEC53S-SD
Standard Duty	27 1/4 692	52 3/4 1340	24x48 610x1219	174 79	SEC55S-SD
Standard Duty	27 1/4 692	65 1651	24x60 610x1524	195 89	SEC56S-SD
Standard Duty	33 1/2 851	40 3/4 1035	30x36 760x914	167 76	SEC63S-SD
Standard Duty	33 1/2 851	52 3/4 1340	30x48 760x1219	193 88	SEC65S-SD
Standard Duty	33 1/2 851	65 1651	30x60 760x1524	215 98	SEC66S-SD

**Note:** Given height is for unit without casters. For approximate overall unit height add chosen caster diameter plus 1" (25mm).  
**Note:** Large casters can create a tipping hazard. On security units using 18" (457mm) deep shelving, do not use casters larger than 5" (127mm) in diameter.

## Heavy-Duty Models — Stainless Steel — {14.01}

### 62" (1575mm) high

Heavy-duty stainless steel models include staked posts for use with standard Metro dollies. Dolly bases and plate casters must be ordered separately. See pages 52-54, or consult your Metro representative for the proper caster for your application. Intermediate shelves are not included with base models and must be ordered separately.

Description	Width (in.) (mm)	Length (in.) (mm)	Fits Shelf (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Stainless Steel
Heavy Duty	28 1/16 713	38 1/2 980	24x36 610x914	154 70	SEC53S-HD
Heavy Duty	28 1/16 713	50 1/2 1285	24x48 610x1219	174 79	SEC55S-HD
Heavy Duty	28 1/16 713	63 3/8 1600	24x60 610x1524	195 89	SEC56S-HD

**Note:** Given height is for unit without a Metro dolly or casters.  
**Note:** To calculate the actual height of the unit using plate casters: 62" [1575mm] + 1/4" [6mm] for dolly + load height of the caster (found on page 51).  
Dolly bases are recommended for applications where security units will be transported over the road. Please consult your Metro representative for the appropriate casters and accessories for these applications.

## Intermediate Shelves for Super Erecta Shelf Security Units

Width (in.) (mm)	Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Metroseal 3 with Microban®	Cat. No. Stainless Steel	Cat. No. Super Erecta Pro
18 457	36 914	9 1/2 4.3	A1836NC	A1836NK3	A1836NS	PR1836NK3
18 457	48 1219	12 5.4	A1848NC	A1848NK3	A1848NS	PR1848NK3
24 610	36 914	13 6	A2436NC	A2436NK3	A2436NS	PR2436NK3
24 610	48 1219	16 7	A2448NC	A2448NK3	A2448NS	PR2448NK3
24 610	60 1524	21 9.5	A2460NC	A2460NK3	A2460NS	PR2460NK3
30 760	36 914	15 6.8	A3036NC		A3036NS	
30 760	48 1219	21 9.5	A3048NC		A3048NS	
30 760	60 1524	26 1/2 11.8	A3060NC		A3060NS	

**Note:** Standard Super Erecta shelves can also be used as intermediate shelves.  
Refer to page 42 for more information.

## Super Erecta Security Modules — {14.01}

Convert a standard 24" (610mm) wide unit into a security module with this convenient kit.

- Used to enclose one or more areas of a unit.
- Fits between shelves spaced 20" (510mm) apart on any Super Erecta Shelving unit.
- Adapts to 24" (610mm) wide shelves in 30", 48" and 60" (760, 1219 and 1524mm) lengths.


Width/Length (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No. Chrome	Cat. No. Stainless Steel
24x30 610x760	20 510	29 1/4 14	SECM2430NC	SECM2430NS
24x48 610x1219	20 510	39 3/4 18	SECM2448NC	*
24x60 610x1524	20 510	45 3/4 21	SECM2460NC	*

**Note:** Security Module consists of side panels, back panels and door. Posts and shelves sold separately, see page 42.  
**When multiple security modules are stacked on one shelving unit, separate top and bottom shelves are still necessary for each module.**  
Security modules must be used with Super Erecta Shelf wire shelves.  
\*Consult your Metro representative for availability.

### Metro Tip:

#### Caster Selection:

For highly corrosive environments, choose casters constructed of appropriate materials. While most wheels are corrosion resistant, the horns and axles are not. Select from a variety of Metro casters with polymer and stainless steel components. See pages 50-51 and 53 for more information.

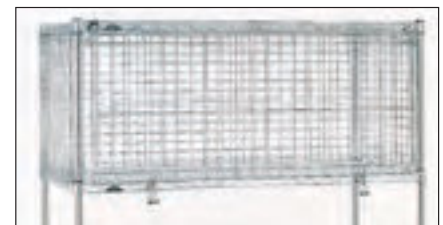

SECM2430NC  
Assembled on Shelving Unit



SEC53DCQ shown with Intermediate Shelves (optional)

## qwikSLOT® Security Units — {14.01}

- Add/Remove-A-Shelf Feature: Allows the unit to quickly adapt to your changing storage needs.
- Shelves can be adjusted easily in seconds.
- Models include two standard Super Erecta shelves which must be used as the top and bottom shelves of the unit. qwikSLOT intermediate shelves are sold separately.

## qwikSLOT Stationary Security

Width (in.)	Width (mm)	Actual Length (in.)	Actual Length (mm)	Height (in.)	Height (mm)	Fits Shelf (in.)	Fits Shelf (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome
21 1/2	546	38 1/2	980	66 13/16	1695	18x36	457x914	138	63	SEC33CQ
21 1/2	546	50 1/2	1283	66 13/16	1695	18x48	457x1219	157	71	SEC35CQ
27 1/4	705	38 1/2	980	66 13/16	1695	24x36	610x914	154	70	SEC53CQ
27 1/4	705	50 1/2	1283	66 13/16	1695	24x48	610x1219	174	79	SEC55CQ
27 1/4	705	62 1/2	1587	66 13/16	1695	24x60	610x1524	195	89	SEC56CQ

## qwikSLOT Mobile Security

Standard-Duty Stem Caster Models: feature 5" (127mm) swivel casters. Please note model numbers for specific caster types.

Caster Type	Width (in.)	Width (mm)	Actual Length (in.)	Actual Length (mm)	Height (in.)	Height (mm)	Fits Shelf (in.)	Fits Shelf (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome
(2) 5MP/5MPB	21 1/2	546	40 3/4	1035	67 15/16	1726	18x36	457x914	146	66	SEC33ECQ
(2) 5MP/5MPB	21 1/2	546	52 3/4	1340	67 15/16	1726	18x48	457x1219	165	75	SEC35ECQ
(4) 5MP	27 1/4	692	40 3/4	1035	67 15/16	1726	24x36	610x914	162	74	SEC53DCQ
(4) 5MP	27 1/4	692	52 3/4	1340	67 15/16	1726	24x48	610x1219	182	83	SEC55DCQ
(4) 5MP	27 1/4	692	65	1651	67 15/16	1726	24x60	610x1524	203	92	SEC56DCQ
(2) 5MP/5MPB	27 1/4	692	40 3/4	1035	67 15/16	1726	24x36	610x914	162	74	SEC53ECQ
(2) 5MP/5MPB	27 1/4	692	52 3/4	1340	67 15/16	1726	24x48	610x1219	182	83	SEC55ECQ
(2) 5MP/5MPB	27 1/4	692	65	1651	67 15/16	1726	24x60	610x1524	203	92	SEC56ECQ

Casters: 5MP and 5MPB (with locking brake) feature a polyurethane tread. 5PC and 5PCB (with locking brake) casters feature a polymer horn and resist rusting. They are recommended for high moisture environments.

**NOTE:** Large casters can create a tipping hazard. On 18" (457mm) security units, do not use casters larger than 5" (127mm) in diameter.

**Heavy-Duty Models:** feature aluminum dollies with wraparound bumpers and 5" (127mm) diameter casters.

Caster Type	Width (in.)	Width (mm)	Actual Length (in.)	Actual Length (mm)	Height (in.)	Height (mm)	Fits Shelf (in.)	Fits Shelf (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome
(2) 5BP/5BPB	28 1/16	713	38 1/2	980	68 7/16	1739	24x36	610x914	187	85	SEC53LCQ
(2) 5BP/5BPB	28 1/16	713	50 1/2	1283	68 7/16	1739	24x48	610x1219	210	95	SEC55LCQ
(2) 5BP/5BPB	28 1/16	713	63 1/8	1600	68 7/16	1739	24x60	610x1524	235	107	SEC56LCQ

## Intermediate Shelves for Super Erecta Shelf Security Units

Width (in.)	Width (mm)	Length (in.)	Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Chrome
18	457	36	914	8 1/2	3.8	1836QBR
18	457	48	1219	11 1/4	5.0	1848QBR*
24	610	36	914	13	6.0	2436QBR*
24	610	48	1219	16	7.0	2448QBR*
24	610	60	1524	21	9.5	2460QBR

\*Chrome qwikSLOT shelves available in sizes 18x36, 18x48, 24x36, and 24x48 (457x914, 457x1219, 610x914, 610x1219, and 610x1524).

\*\*Drop Mat qwikSLOT shelves with 1" (25mm) ledge also available in sizes 24x36, 24x48 (610x914, 610x1219).



Clips snap easily into slots along post length to support shelves.



**qwikSLOT Locking Clip**  
Recommended for mobile applications. Must be used with 9985QS shelf clips. (Package of 4)  
Cat. No. 9985QSL



# MetroMax® Q

# Security.

## MetroMax Q Security Units — {14.01}

Protects valuable materials and sensitive items from loss or pilferage.

- Readyview of contents: Heavy gauge open wire construction keep contents visible at all times, making it easy to check inventory.
- Microban antimicrobial product protection is built into the enclosures, doors, handles, and shelves to keep the product "cleaner between cleanings."
- Optional intermediate shelves: MetroMax Q quick adjust shelves or corrosion proof MetroMax i.
- Double door with ergonomic 1/4-turn handle: Each door opens 270 degrees and can be secured along the sides of the unit.
- Shipped knocked down to save on freight costs. Assembles in minutes.



MQSEC53VE with optional intermediate shelves

## MetroMax Q Stationary Units — 66<sup>3</sup>/<sub>16</sub>" (1681mm) High

Actual Outside Dimensions		Length		Fits Shelf		Approx. Pkd. Wt.		Cat. No.
Width (in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	
26 <sup>15</sup> / <sub>16</sub>	685	38 <sup>7</sup> / <sub>8</sub>	987	24x36	610x914	148	67	MQSEC53E
26 <sup>15</sup> / <sub>16</sub>	685	50 <sup>7</sup> / <sub>8</sub>	1292	24x48	610x1219	156	71	MQSEC55E
26 <sup>15</sup> / <sub>16</sub>	685	62 <sup>7</sup> / <sub>8</sub>	1597	24x60	610x1524	161	73	MQSEC56E

**Note:** Leveling foot on post can be adjusted up to 1" (25mm) to compensate for uneven floors.

## MetroMax Q Stem Caster Mobile Units — 67<sup>13</sup>/<sub>16</sub>" (1723mm) High

Models include four 5" (127mm) diameter casters with polyurethane tread; two swivel and two swivel with brakes.

Actual Outside Dimensions (including Bumpers and Handle)		Length		Fits Shelf		Approx. Pkd. Wt.		Cat. No. Includes Casters with Plated Finish	Cat. No. Includes Corrosion Resistant Polymer Casters
Width (in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)		
27 <sup>13</sup> / <sub>16</sub>	707	40 <sup>3</sup> / <sub>4</sub>	1035	24x36	610x914	166	75	MQSEC53DE	MQSEC53VE
27 <sup>13</sup> / <sub>16</sub>	707	52 <sup>3</sup> / <sub>4</sub>	1340	24x48	610x1219	176	80	MQSEC55DE	MQSEC55VE
27 <sup>13</sup> / <sub>16</sub>	707	64 <sup>3</sup> / <sub>4</sub>	1645	24x60	610x1524	179	81	MQSEC56DE	MQSEC56VE

\*\*DE" models use two 5MPX and two 5MPBX casters.

\*\*\*VE" models use two 5PCX and two 5PCBX casters. Recommended for wet or damp environments.

## MetroMax Q Heavy-Duty Mobile Units — 68<sup>1</sup>/<sub>2</sub>" (1740mm) High

Mounted on aluminum dolly with 5" (127mm) plate casters and wraparound bumpers.

Actual Outside Dimensions (including Handle)		Length		Fits Shelf		Approx. Pkd. Wt.		Cat. No.
Width (in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	
28 <sup>1</sup> / <sub>16</sub>	713	39 <sup>1</sup> / <sub>8</sub>	994	24x36	610x914	166	75	MQSEC53LE
28 <sup>1</sup> / <sub>16</sub>	713	51 <sup>1</sup> / <sub>8</sub>	1299	24x48	610x1219	176	80	MQSEC55LE
28 <sup>1</sup> / <sub>16</sub>	713	63 <sup>1</sup> / <sub>8</sub>	1603	24x60	610x1524	179	81	MQSEC56LE

**Note:** The aluminum dollies used on the LE models have two B5P and two B5PB plate casters.

## Intermediate Shelves

Width		Length		Cat. No. Shelf with Grid Mat	Cat. No. Shelf with Solid Mat	Cat. No. Shelf with Grid Mat
(in.)	(mm)	(in.)	(mm)			
24	610	36	914	MX2436G	MX2436F	MQ2436G
24	610	48	1220	MX2448G	MX2448F	MQ2448G
24	610	60	1524	MX2460G	MX2460F	MQ2460G

Standard Units consist of top and bottom wire shelves, tri-lobal adapters, steel posts, wire enclosures, and doors. Casters are included with mobile units. Intermediate shelves are sold separately.



Ergonomic — 1/4 turn door handle







Always at  
the point of  
sale.



Super Erecta®

MetroMax®

Appeal®

DropMat™

qwikSLOT®

C5®

# GROCERY & RETAIL SOLUTIONS

Grocery Solutions .....	140-147
Retail Solutions .....	148-149
Specialty Shelving .....	150-152
Mobile Tray & Drying Racks.....	153



# Super-duper supermarket. pg. 65-69

DropMat® qwik SLOT®



pg. 146

C5 Heated Cabinets



Super Erecta® Specialty

DropMat® qwik SLOT®  
Appeal®






DropMat® qwikSLOT®  
Maximum Density  
Delivers Maximum Profits.



Create unique  
displays using pushers,  
hooks & pegboard.

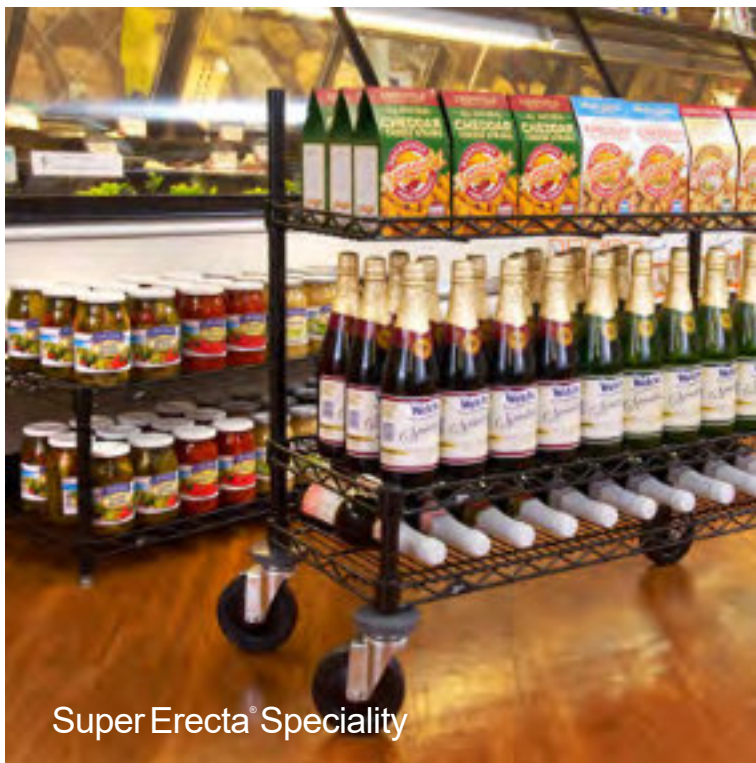





Store it  
like the pros.  
pg. 31-79



Safely Hold up to  
**800 lbs.**  
per shelf.

pg. 32  
Super Erecta® Pro

RUST RESISTANT  
COATED WIRE  
with Removable Shelf Mats

Advanced Storage and Transport  
for ALL environments

✓ EASY-TO-CLEAN  
REMOVABLE MATS

✓ ANTIMICROBIAL  
PROTECTION



PROTECTION THAT LIVES ON  
**MICROBAN**

**12**  
YEAR  
CORROSION  
WARRANTY



NSF

pg. 36

## Super Erecta® MetroSeal 3™

Super Adjustable Super Erecta® MetroSeal 3™

**RUST RESISTANT  
COATED WIRE**

Basic Storage and Transport for  
ALL Environments.

✓ ANTIMICROBIAL  
PROTECTION

PROTECTED THAT LIVES ON  
**MICROBAN®**

✓ EASY-ADJUST  
OPTIONS

✓ **12 YEAR**  
CORROSION WARRANTY

✓ **HOLDS UP TO 800 LBS.**  
PER SHELF (363kg)



pg. 36

## Super Erecta®

Super Erecta® Chrome & Brite

Super Adjustable Super Erecta® Chrome & Brite

**TRADITIONAL WIRE**

Basic Storage and Transport for  
Dry Environments.

😊 EASY-ADJUST  
OPTIONS

😊 **HOLDS UP TO 800 LBS.**  
PER SHELF (363kg)



NSF

Safely Hold up to  
**800 lbs.**  
per shelf.





# Clean. Safe. Forever. pg. 10-29



NSF

## MetroMax<sup>®</sup> i

100% RUST-PROOF  
ALL-POLYMER

with Super Strong Stainless Steel Corners

The strongest, most versatile, corrosion proof shelving system in the world.



**LIFETIME**  
CORROSION WARRANTY



**EASY-TO-CLEAN,**  
REMOVABLE MATS



**HOLDS UP TO 800 LBS.**  
(363kg) PER SHELF  
**2000 LBS.** (907kg) PER UNIT  
**900 LBS.** (454kg) PER MOBILE UNIT



**TEAR RESISTANT**  
SURFACES





## MetroMax® 4

**100% RUST-PROOF  
ALL-POLYMER**

Corrosionproof performance, proven Metro stability, and unrivaled value.



**LIFETIME**  
CORROSION WARRANTY



**EASY-TO-CLEAN,**  
REMOVABLE MATS



**HOLDS UP TO 600 LBS.**  
PER SHELF (272kg)

PROTECTION THAT LIVES ON  
**MICROBAN®**



## MetroMax® Q

**RUST RESISTANT POLYMER  
& COATED WIRE**  
with Removable Shelf Mats

Quick adjustment, corrosion resistance and the strength of steel.



**15-YEAR**  
CORROSION WARRANTY



**EASY-TO-CLEAN,**  
REMOVABLE MATS



**HOLDS UP TO 800 LBS.**  
(363kg) PER SHELF  
**2000 LBS.** (907kg) PER UNIT  
**900 LBS.** (454kg) PER MOBILE UNIT

PROTECTION THAT LIVES ON  
**MICROBAN®**





# Hold & Proof with Metro.

## C5® 9, 8 & 6 Series

High performance cabinets with 3 levels of control. Precise moisture, precise temperature, or analog control.

## C5® 4 Series

with *Insulation Armour® Plus*  
High performance holding and energy efficiency at a lower initial investment.

## C5® 3 Series

with *Insulation Armour®*  
Cool-to-touch design provides energy efficiency at a lower initial investment.

## C5® 1 Series


An ideal solution for proofing and basic holding needs.



Insulation Type	Fiberglass	BETTER
Cabinet Material	Stainless Steel or Aluminum	BEST



Insulation Type	Foamed-in-Place (Insulation Armour Plus)	BEST
Cabinet Material	Stainless Steel/ Polymer	BEST



Insulation Type	Insulation Armour	GOOD
Cabinet Material	Aluminum/ Polymer	GOOD



Insulation Type	Non-Insulated	
Cabinet Material	Aluminum	GOOD

\*Average annual energy cost based on \$0.12 per KWH electricity rate, 12 hours of daily use, 365 days a year. Energy cost and savings will vary depending on usage, electricity cost, and comparative model.

Visit [www.metro.com/c5](http://www.metro.com/c5) for more information on C5 heated holding and proofing cabinets.

Metro cabinets are only to be used as Hot Food Holding Cabinets. They are meant to keep cooked food hot until served and are listed under UL197 "Commercial Electric Cooking Appliances." Do not use for non-food applications.







### Customize to maximize.

Metro offers solutions that can mirror your process or provide better workflow opportunities for any order to be picked in store.



### Pick, sort, store & transport orders faster and more efficiently with Metro.


- Multiple Order Picking Capacity
- Easy to Maneuver
- Quick Tote Access
- Great for Stocking
- Holds Laptop or iPad

Let us help you configure a cart to meet your grocery application.



The look  
that sells.  
pg. 43

Super Erecta®

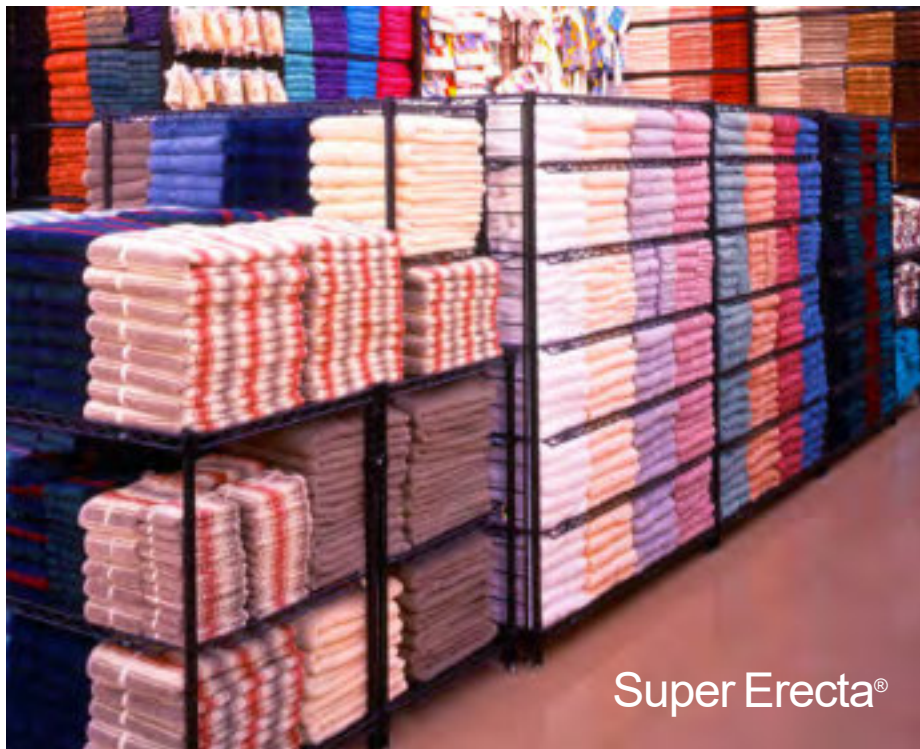

Super Erecta®



qwikSLOT®

pg. 66






Super Erecta® Specialty



Super Erecta®

A premium look  
with flexibility  
to adapt to any  
décor or retail  
theme.

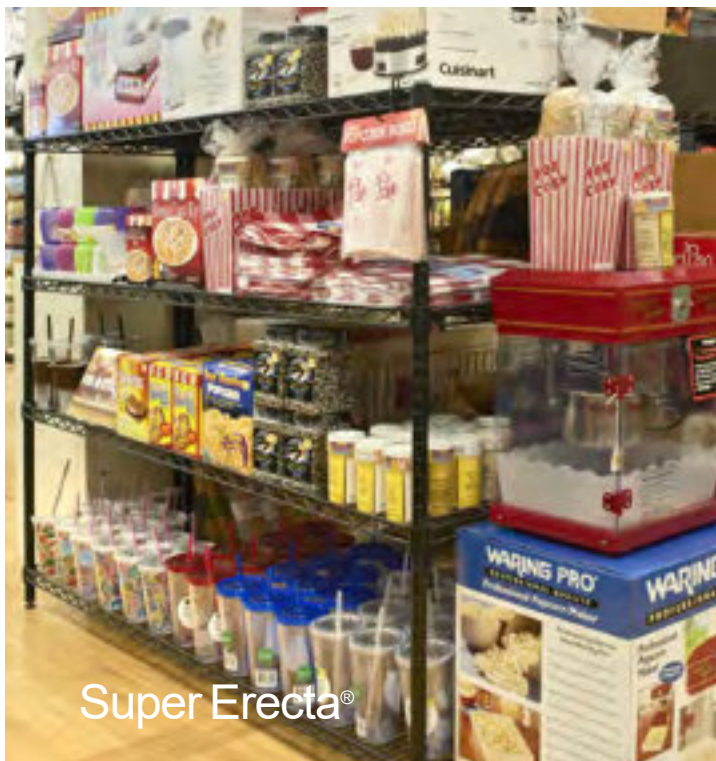

Super Erecta®

Unique options  
for attractive  
presentations.





### Basket Cart

Easy access and mobility, Metro Basket Carts are perfect for POP displays. Available in multiple height options, baskets can hold up to 250 lbs. (113kg)

Description	Height		Cat. No.
	(in.)	(mm)	
18"x24" (457x610mm) Black Finish (4) 8" Deep Wire Basket Cart	68	1727	<b>PKM4BSK182463B</b>
18"x24" (457x610mm) Black Finish (2) 8" Deep Wire Basket Cart	37	864	<b>PK2387</b>



Basket Shelf  
(Posts sold separately, see page 42)

### Basket Shelf — {10.04}

3 1/2" (89mm) deep basket with 400 lbs. (182kg) weight capacity. Ideal for cross merchandising in front of display cases or driving impulse sales.

Size (in.)	Size (mm)	Cat. No. Chrome	Cat. No. Black
14x36	355x914	—	<b>DD3448A</b>
14x48	355x1219	—	<b>DD3448B</b>
18x36	457x914	<b>CC9744A</b>	<b>CC9744C</b>
18x48	457x1219	<b>CC9744</b>	<b>CC9744B</b>



Triangle Shelving Unit with four triangle shelves and three Super Erecta posts.

### Triangle Shelves — {10.04}

Put unused corner space to work while keeping traffic aisles clear.

- Shelf sizes corresponding to width (depth) of shelving for add-on capabilities.
- Shelves attach to standard Super Erecta or qwikSLOT posts, see pages 42 and 66.

Size Width (in.)	Size (mm)	Approx. Pkd. Wt.		Cat. No. Chrome	Cat. No. Black
		(lbs.)	(kg)		
18	457	15 1/2	7	<b>H18TRC</b>	<b>H18TRB</b>
24	610	21 1/2	10	<b>H24TRC</b>	<b>H24TRB</b>

Weight load capacity: 200 lbs. (91kg) per shelf; 400 lbs. (182kg) per unit.



Cantilever Shelves

### Cantilever Shelves — {10.05}

Adds convenient space above a storage unit. Drop mat design creates a retaining ledge around the entire 12" (305mm) deep shelf. See page 46.



## Post Connectors — {10.15}

Attach posts of upper shelvesto lower level frame or mat to create tiered shelving.

Type of Connectors	Finish	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
4 Post-to-Shelf Frame	Black	1	.5	<b>HFCB</b>
4 Post-to-Shelf Mat	Black	2	1	<b>HMCB</b>
4 Post-to-Shelf Mat	Chrome	2	1	<b>HMCC</b>



Tiered Shelving with Post Connectors

## Display Platforms — {10.44}

Super Erecta Display Platforms are ideal for displaying large, bulky items, boxed goods or crossmerchandising. All platforms come with one shelf and four 13" (330mm) posts.

Width/Length (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Cat. No. Chrome
18x24	457x610	11	5.0	<b>P1824NC</b>
18x30	457x760	12	5.5	<b>P1830NC</b>
18x36	457x914	13 1/2	6.1	<b>P1836NC</b>
21x24	530x610	12	5.5	<b>P2124NC</b>
21x30	530x760	13	5.9	<b>P2130NC</b>
21x36	530x914	15	6.8	<b>P2136NC</b>
24x24	610x610	13	5.9	<b>P2424NC</b>
24x30	610x760	15	6.8	<b>P2430NC</b>
24x36	610x914	17	7.7	<b>P2436NC</b>



Display Platforms (Shown with one optional/additional shelf)

## Slanted-Shelf Merchandisers — {50.50}

A premium presentation, slanted shelvesadd visibility and accessibility. Loading is quick, easy, and organized.

- Open wire construction and slope of shelvespromote visibility.
- Shelvesareadjustable at 1" (25mm) intervals along the height of the post.
- 5" (127mm) castersadd mobility, while brakeslock firmly in position.

Width (in.) (mm)		Length (in.) (mm)		Height (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Shelves	Cat. No.
18	457	24	610	60	1524	103	46.3	Four Slanted Shelves One Flat Top Shelf (Pkg. of 12 dividers)	<b>DC15EC</b>
18	457	24	610	60	1524	112	50.4	Five Slanted Shelves (Pkg. of 12 dividers)	<b>DC16EC</b>
18	457	36	914	60	1524	95	42.7	Four Slanted Shelves One Flat Top Shelf	<b>DC35EC</b>
18	457	36	914	70	1778	104	46.8	Five Slanted Shelves	<b>DC36EC</b>
18	457	48	1219	60	1524	112	50.4	Four Slanted Shelves One Flat Top Shelf	<b>DC55EC</b>
18	457	48	1219	70	1778	123	55.3	Five Slanted Shelves	<b>DC56EC</b>

### Additional Shelves


Additional shelvesare 18" (457mm) wide.

Length (in.) (mm)	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
24 610	10.5	4.7	<b>1824DNC</b>
36 914	14	6.3	<b>1836DNC</b>
48 1219	18	8.1	<b>1848DNC</b>

### Additional Dividers

Keepsdifferent types of merchandise separated and in order.

Size Width/Length (in.) (mm)	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
4x17 100x430	8	3.6	<b>DCR17C</b>

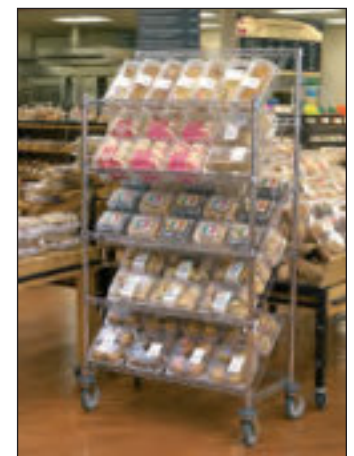

Slanted Shelf Merchandiser/  
Dispenser Rack  
DC56EC





Wine Cart



WC257C Cradle Shelving



WB257C Bulk Shelving

## Super Erecta® Wine Storage and Display

# Store it. Display it. Sell it. Or just drink it!

### Wine Cart

Mobile wine merchandiser is perfect for creating "impulse" opportunities. The Wine Cart consists of the following components:

- 2—1436NC shelves—see page 42
- 1—1236CSNC cantilever shelf—see page 46
- 2—13UP posts (cut to 7" [178mm])—see page 42
- 2—27UP posts—see page 42
- 2—5M swivel casters—see page 50
- 2—5MB swivel/brake casters—see page 50

### Super Erecta Display Shelving

Super Erecta Display Shelving creates a "wall of product." For chrome-plated or standard epoxy colors (black, white, smoked glass), see pages 43.

For Designer Color Shelving, see pages 43.

### Cradle Wine Units

- Wire creates highly visible display.
- Wire forms a cradle that nests individual bottles.
- Shelves spread 5" (127mm) apart for easy access.
- Open wire permits free air circulation around bottles.

Width/Length (in.)	(mm)	Overall Height (in.)	(mm)	Capacity (750ml bottles)	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No. Chrome
14x36	355x914	74 <sup>3</sup> / <sub>4</sub>	1899	126	112	51	WC237C
14x36	355x914	86 <sup>3</sup> / <sub>4</sub>	2203	153	133	60	WC238C
14x48	355x1219	74 <sup>3</sup> / <sub>4</sub>	1899	168	133	60	WC257C
14x48	355x1219	86 <sup>3</sup> / <sub>4</sub>	2203	204	160	73	WC258C

All models include foot plates for stability and easy leveling.

### Cradle Wine Shelves

Width/Length (in.)	(mm)	Capacity (750ml bottles)	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
14x36	355x914	9	7	3.2	W1436NC
14x48	355x1219	12	8.5	3.8	W1448NC

### Bulk Wine Units

- Store large quantities in limited space—average one case per linear foot of shelf.
- Keep corks moist—inserts hold bottle at 10° slant.
- Open wire design allows air flow for proper temperature maintenance.
- Units enclosed to secure product.
- Optional locking doors available for the 16-case unit.
- Large 15" (381mm) space between shelves.

Width/Length (in.)	(mm)	Overall Height (in.)	(mm)	Capacity (Cases of 750ml bottles)	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No. Chrome
14x36	355x914	74 <sup>3</sup> / <sub>4</sub>	1899	12	138	63	WB237C
14x36	355x914	86 <sup>3</sup> / <sub>4</sub>	2203	15	168	76	WB238C
14x48	355x1219	74 <sup>3</sup> / <sub>4</sub>	1899	16	168	76	WB257C
14x48	355x1219	86 <sup>3</sup> / <sub>4</sub>	2203	20	204	93	WB258C

All models include foot plates for stability and easy leveling.

### 14" (355mm) Flat Wire Shelves

Width/Length (in.)	(mm)	Overall Height (in.)	(mm)	Capacity (Cases of 750ml bottles)	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
14x36	355x914	9 <sup>1</sup> / <sub>2</sub>	241	4.3	1436NC		
14x48	355x1219	12	305	5.4	1448NC		

# Eliminate “Wet Nesting” and kick bacteria to the curb.



**MetroMax®  
Drying Racks**  
**See Pg. 28**  
for complete  
drying solutions.

## End Load, Side Load and Half Height Wire Bun Pan Racks — {13.42} {13.44} NSF

Economical solution for on-site storage and transport of trays. End-load models provide a large tray landing area, side-load models are highly space efficient. Choice of 1½" (38mm) spacing (38 pans) or 3" (76mm) (20 pans) spacing. Quick, easy no-tool assembly, rolls easily on 5" (127mm) swivel casters. Durable, Super Erecta Brite™ finish.

### End Load and Side Load Models

Width/Length (in.) (mm)		Height (in.) (mm)		Slide Spacing (in.) (mm)		Pan Capacity			Approx.		Description	Cat. No.
						No.	Size		(lbs.)	(kg)		
(in.)	(mm)	(in.)	(mm)	(in.)	(mm)							
21¾x27	552x685	69	1752	1½	38	38	18x26	457x660	61	27.7	End-Load	RE1
21¾x27	552x685	69	1752	3	76	19	18x26	457x660	70	31.8	End-Load	RE3
19½x30	495x762	69	1752	1½	38	38	18x26	457x660	61	27.6	Side-Load	RS1
19½x30	495x762	69	1752	3	76	19	18x26	457x660	70	31.8	Side-Load	RS3

Weight Load Capacity: 30 lbs. (13.7kg) per level; 200 lbs. (90.7kg) per unit.

### Half Height Models

Width/Length (in.) (mm)		Height (in.) (mm)		Slide Spacing (in.) (mm)		Pan Capacity Size			Approx. Pkd.Wt.		Description	Cat. No.
						No.	(in.)	(mm)	(lbs.)	(kg)		
21¾x27	550x685	38	1750	1½	38	16	18x26	457x660	50	22.6	End-Load	RE1P
21¾x27	550x685	38	1750	3	76	8	18x26	457x660	60	27.2	End-Load	RE3P

Models ship with ½" (12.7mm) food grade polyethylene cutting board/work surface.



Wire Bun Pan Racks



Half Height Wire  
Prep Rack  
(tray not included)

## Accessories

Description	Model
3½" (90mm) Diameter Rubber Donut Bumper	9992DB
5½" (140mm) Diameter Rubber Donut Bumper	9992N

## Side Load “Knock Down” Racks — {13.72} NSF

Inside height 56½" (1435mm).

Width/Height/Depth (in.) (mm)	Slide Spacing (in.) (mm)	Pan Capacity	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No.
		No. Size (in.) (mm)		
28¾x64½x18¾	721x1628x476	3 76 18 18x26 457x660	40 18	RT3318N
28¾x64½x18¾	721x1628x476	5 127 11 18x26 457x660	38 17.1	RT3511N

Note: 5" (127mm) swivel casters, two with brakes, are standard on units listed above.



Side Load Rack  
(trays not included)

## End Load “Knock Down” Racks — Single Section — {13.70} NSF

Inside height 55⅞" (1417mm).

Width/Height/Depth (in.) (mm)	Slide Spacing (in.) (mm)	Pan Capacity	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No.
		No. Size (in.) (mm)		
20¾x64½x28	518x1630x711	3 76 18 18x26 457x660	53 23.8	RT183N
20¾x64½x28	518x1630x711	or 36 14x18 355x457	50 22.5	RT115N
		11 18x26 457x660		
20¾x64½x28	518x1630x711	or 22 14x18 355x457	55 24.7	RT1334N
		34 18x26 457x660		

Note: 5" (127mm) swivel casters, two with brakes, are standard on units listed above.



End Load Rack





MetroMax®  
MyCart®  
Starsys®  
Flexline®

# LABORATORY SOLUTIONS

Lab Carts & Storage .....	156-169
Lab Storage, Autoclave Storage & Carts .....	170-175
LARFeedCarts & Storage .....	176-177
StarsysLabFurniture .....	178-210

See pg. 124

# myCart

Utility Cart

## Better Containment!

Ship's edge retains small spills and prevents items from sliding off during transport.



PROTECTION THAT LIVES ON  
**MICROBAN**



**Make it yours.**



## Easy & Useful

Easy-grip handle and roomy utility tray

# myFold



fold.



unfold.



# deepLedge



\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.

## MetroMax® i Lab Storage Cart

- **CorrosionProof**—A unique storage and transport system: Engineered polymers and Type 304 stainless are warranted against rust and corrosion for the life of the product.
- **Microban®\*** antimicrobial product protection —A Metro exclusive— is built into all shelves and touch points, inhibiting the growth of mold, mildew, and bacteria.
- **Cleanable**—Lift off grid and solid shelf mats are sized to fit into a sink making cleaning easy.
- **Flexible**—A range of shelf sizes, post heights and accessories allow you to “customize” the system to fit your requirements.

See pages 12-29.

## MetroMax i® Utility Carts

- Removable shelves provide easy cleaning.
- Open-architecture design allows for our full line of accessories to be used.
- 2-shelf and 3-shelf configurations available.
- Weight capacity 900 lbs. (408kg) per cart.

Width (in.)	Length/Height (mm)	Description	Cat. No.
18x30x40	457x760x1015	2-shelf	<b>MXUC1830G-25</b>
24x36x40	610x914x1015	2-shelf	<b>MXUC2436G-25</b>
18x30x40	457x760x1015	3-shelf	<b>MXUC1830G-35</b>
24x36x40	610x914x1015	3-shelf	<b>MXUC2436G-35</b>

For Stainless Steel Wire and Solid Carts, see pages 128-129.



MetroMax i Utility Cart

## MetroMax® i Lab Carts — {15.01}

Metro's Lab Cart line includes a General Lab Cart, Chemical Cart, and Mobile Desk. All carts are designed to offer superior corrosion resistance. Smooth rolling, 5" (127mm) polyurethane casters come standard with each cart. All shelves adjust in 1" (25mm) increments, offering precise shelf adjustment and maximum storage utilization.



**MDSX3**  
Mobile Desk  
(casters included)  
Monitor Mounting Bar, Mounting Bracket, and Keyboard Shelf sold separately. (See page 158)



**LABX3**  
General Lab Cart  
(casters included)



**CHEMX3**  
Chemical Cart  
(casters included)

Width (in.)	Length (mm)	Height (in.)	Height (mm)	Cart Load Rating (lbs.) (kg)	Description	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
18	457	36	914	900 408	General Lab Cart	43 19.5	<b>LABX3</b>
18	457	36	914	900 408	Chemical Cart	49 22.2	<b>CHEMX3</b>
18	457	36	914	900 408	Mobile Desk	55 24.9	<b>MDSX3<sup>1</sup></b>

<sup>1</sup> Mobile desk features a phenolic work surface offering a high level of corrosion resistance. Mobile desk includes: four polyurethane brake casters, each measuring 5" (127mm), for maximum stability when foot-operated brakes are engaged.

**Note:** All carts include 5MPX series casters (2 brake, 2 swivel), unless otherwise noted.

Indicates antimicrobial product.

\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.





FMAX and TMX

HPLC3X3  
(Shown with  
accessories and casters)

KBX

FM30X3/FM36X3/FM48X3  
(CrossBar and Mounting  
Bracket included)

### Usage Instruction

- When flat monitor mounting kit is in use, please remove flat monitor from crossbar before cart transport.



PSX

## MetroMax® i High-Performance Liquid Chromatography (HPLC) Carts — {52.01}

- HPLC carts contribute to greater benchtop productivity.
- Mobilize and stack HPLC equipment on carts to maximize valuable lab space.
- Avoid crowding valuable benchtop space with High-Performance Liquid Chromatography (HPLC) or other analytical equipment.

### HPLC Models — 4 Shelf Models (Casters not included\*)

Width (in.) (mm)	Length (in.) (mm)	Height (in.) (mm)	Description	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No.
24	610	30 760	4-Shelf Unit Single Experiment Cart	70 32	HPLC3X3
24	610	48 1219	4-Shelf Unit Double Experiment Cart	101 46	HPLC4X3

See page 174 for Caster Selection Guide.

### HPLC Models — 5 Shelf Models (Casters included)

Width (in.) (mm)	Length (in.) (mm)	Height (in.) (mm)	Description	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No.
24	610	30 760	5-Shelf Unit Single Experiment Cart	89.5 40.6	HPLC1X3
24	610	48 1219	5-Shelf Unit Double Experiment Cart	114.5 51.9	HPLC2X3

**Note 1:** Single HPLC experiment carts feature a 24"x30" (610x760mm), five-shelf unit (4 solid, 1 open-grid shelf mounted on 74" (1880mm) mobile posts. Double HPLC experiment carts feature a 24"x48" (610x1219mm), five-shelf unit (4 solid, 1 open-grid shelf) mounted on a 74" (1880mm) mobile posts.

**Note 2:** Metro tote boxes can be used to complete the system, either on the bottom shelf to contain test beakers or flasks, or in conjunction with an Undershelf Slide (see page 26) to provide a drawer for small tool storage.

### Accessories

Description	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No.
Post-Mount Swing Arm for Flat Monitor*	4.5 2.0	FMAX
Post-Mount Cable/Tube Management Clips	1.0 .45	TMX

\*Includes VESA mounting plate.

### Slide-out Keyboard Shelf

Epoxy-coated keyboard shelf provides high level of corrosion resistance. Designed to fit both 18" (457mm) and 24" (610mm) wide MetroMax i shelves. Keyboard shelf loading should not exceed 10 lbs. (45.8kg).

Dimensions: 16"W x 26 1/2"L x 5"H. (406x673x127mm)

Cat. No. **KBX**

### Flat Monitor Mounting Kit

Unique mounting bracket and cross-bar design permits flat monitor to be mounted on MetroMax i units. Flat monitor can be mounted between two MetroMax i posts, either in back or front of unit. Mounting bracket loading should not exceed 30 lbs. (14kg). VESA mounting plates included with bracket.

**Note:** For flat monitor mounting on MetroMax i order either Cat. No. FM30X3, FM36X3, or FM48X3 (Cross-bar and mounting bracket included). For flat monitor mounting on Mobile Desk order Cat. No. FMBX.

Cross-Bar Dimensions:

2 1/8"W x 30"L x 3"H (54x762x76mm)

2 1/8"W x 36"L x 3"H (54x914x76mm)

2 1/8"W x 48"L x 3"H (54x1219x76mm)

Cat. No. **FM30X3** (Bracket and CrossBar)

Cat. No. **FM36X3** (Bracket and CrossBar)

Cat. No. **FM48X3** (Bracket and CrossBar)

Cat. No. **FMBX** (Mounting Bracket only)

Bracket Dimensions:

3 7/16"W x 8 13/16"L x 5 3/4"H (87x223x146mm) (Cat. No. FMBX)

### Power Strip

Six outlet power strip, featuring surge protection, mounts flush with any MetroMax i shelf frame. Power strip is UL approved. Gray power strip comes with 6 foot (1829mm) long cord.

Dimensions: 2 1/4"W x 13"L x 4 1/4"H (57x330x108mm)

Cat. No. **PSX**

✓ Indicates antimicrobial product.

## MetroMax® i Glassware Carts —{52.01}

- Two-basket and four-basket capacity glassware solutions are offered in a space-saving 18" x 36" (457 x 914mm) footprint.
- Solid MetroMax i bottom shelf provides spill retention and can be removed from shelf frame for easy cleaning.
- MetroMax i components provide lifetime corrosion protection.
- Choose from a wide range of accessories, including all-polymer casters, for maximum corrosion resistance and premium performance.

Refer to page 174 for choice of casters. Units listed below do not include casters. Metro's 5PC series (two brake, two swivel) casters are recommended for superior lifetime performance. **Order casters separately.**

Width (in.)	Length (in.)	Height (in.)	Description	Approx. Pkd.Wt. (lbs.)	Approx. Pkd.Wt. (kg)	Cat. No.
18	457	36	2-Basket Unit	38	17	<b>GWBX3-1</b>
18	457	36	4-Basket Unit	83	37	<b>GWBX3-2</b>
18	457	36	2-Tote Kit Unit	36	16.3	<b>GWTX3-1</b>
18	457	36	4-Tote Kit Unit	101	46	<b>GWTX3-2</b>



GWBX3-1  
(Shown with Metro Tote Kit  
on bottom shelf and casters)

## Accessories

Width (in.)	Length (in.)	Height (in.)	Description	Approx. Pkd.Wt. (lbs.)	Approx. Pkd.Wt. (kg)	Cat. No.
18	457	36	Clear Cart Cover — Short Unit	2.5	1.1	<b>GWCVC41</b>
18	457	36	Clear Cart Cover — Tall Unit	3.5	1.6	<b>GWCVC62</b>
18	457	36	Blue Cart Cover — Short Unit	2.5	1.1	<b>GWSVC41</b>
18	457	36	Blue Cart Cover — Tall Unit	3.5	1.6	<b>GWSVC62</b>
18	457	35 1/2	Tote Glassware Transport Kit	38.0	17.0	<b>*GWOLYKIT</b>
18	457	35 1/2	Vinyl-Coated Baskets (2/pk.)	8.0	3.6	<b>GWBSKT36</b>

\*Each Metro tote kit includes TB93060NAT (1), TB92060NAT (1), DL93060NAT (3), DS93060NAT (3), DS92060NAT (3), and DL92060NAT (3).



GWBX3-1  
(with blue cart  
cover and casters)



GWBSKT36



GWTX3-1  
(Includes two tote boxes.  
Casters and additional tote boxes  
sold separately)



GWBX3-2  
Shown with GWTX3-1



GWBX3-1  
(with clear cart cover  
and casters)



Red shelf markers can  
be used to designate  
unclean glassware  
(See page 25)



Blue shelf markers can  
be used to designate  
clean glassware  
(See page 25)

By combining standard MetroMax i components, including MetroMax i baskets, a custom glassware cart can be created. Contact your Metro representative for more information.

Indicates antimicrobial product.



Lab Security Cart — {52.05}

Provides secure storage for animal cage, lab instrument, or hazardous chemical transport. Solid stainless steel shelf with raised ship's edge can be used as a work surface and can contain unwanted spills.

Width (in.)	Length (in.)	Height (in.)	Rating <sup>1</sup> (lbs.)	Description	Approx. Pkd. Wt. (lbs.)	Cat. No.
24	30	39	600	Stainless steel security cart with flip-up door	85	SECMLAB*
610	760	990	273	5" (127mm) polyurethane casters	38.6	

\*Lab Security Cart features two stainless steel wire shelves, one stainless steel security module, and one stainless steel solid shelf. Cart comes standard with two brake casters (Cat. No. 5MPB) and two swivel casters (Cat. No. 5MP).

Lab Security Cart  
(shown with optional accessories)

Premium quality.  
Genuine Metro.



MW700 Series



MW200 Series



MW400 Series

Utility Carts

- Wire and solid shelves available.
- Choose between stainless and chrome finishes.
- Adjust shelves on 1" (25mm) increments.
- Various sizes and styles to choose from. (See pages 128-129)

See pg. 128



## Enclosed Lab Carts — {33.10}

The functional design of Metro Enclosed Lab Carts maximizes usable inside storage space and provides superior maneuverability. Carts can be used wherever contents must be protected from an "unclean" environment.



Width				Height				Approx. Pkd.Wt.		Cat. No. with 5" Stainless Casters
Overall (in.)	(mm)	Cabinet (in.)	(mm)	Overall (in.)	(mm)	Cabinet (in.)	(mm)	(lbs.)	(kg)	
33	838	27 <sup>5</sup> / <sub>8</sub>	702	39 <sup>9</sup> / <sub>16</sub>	1005	31 <sup>1</sup> / <sub>4</sub>	794	115	52	CASE24-L6S-P
45	1143	39 <sup>5</sup> / <sub>8</sub>	1007	39 <sup>9</sup> / <sub>16</sub>	1005	31 <sup>1</sup> / <sub>4</sub>	794	186	84	CASE36-L6S-P
57	1448	51 <sup>5</sup> / <sub>8</sub>	1311	39 <sup>9</sup> / <sub>16</sub>	1005	31 <sup>1</sup> / <sub>4</sub>	794	212	96	CASE48-L6S-P
33	838	27 <sup>5</sup> / <sub>8</sub>	702	56 <sup>15</sup> / <sub>16</sub>	1446	48 <sup>7</sup> / <sub>8</sub>	1240	162	73	CASE24-H6S-P
45	1143	39 <sup>5</sup> / <sub>8</sub>	1007	56 <sup>15</sup> / <sub>16</sub>	1446	48 <sup>7</sup> / <sub>8</sub>	1240	262	119	CASE36-H6S-P

All units are 28<sup>11</sup>/<sub>16</sub>" (729mm) deep overall. Cabinet depth is 25<sup>7</sup>/<sub>8</sub>" (657mm). Add -P suffix to end of catalog number to include security latch (i.e. CASE24-L6S-P).

## Optional Shelves (Wire Pullout with Rollers, Solid)

For Use with Cart Model No. Prefix	Shelf Size (in.)	(mm)	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No. Wire Shelf	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No. Roller Shelf	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No. Solid Shelf
CASE24-	24x24	610x610	9 4.1	CASE-24WS	12 5.5	CASE-24RS	15 6.8	CASE-24SS
CASE36-	24x36	610x914	13 5.9	CASE-36WS	16 7.3	CASE-36RS	19 8.6	CASE-36SS
CASE48-	24x48	610x1219	19 8.6	CASE-48WS	21 9.5	CASE-48RS	25 11.3	CASE-48SS

Each shelf includes two attachment brackets. Shelf weight capacity is 150 lbs. (68kg) evenly distributed.



**Optional wire roller shelf** extends out half way, easily and quietly, even at lowest level where accessibility is vital. Shelf brackets attach and detach quickly from unique "keyhole" slots for easy shelf adjustability at 2" increments.



**Easily Maneuverable:** Full length handles on both sides of the low profile carts and CASE36-Hallow for pushing or pulling from either end and provide better cart control. One full length handle is ergonomically located on the CASE24-Hcart.



**Cleans Easily:** Stainless steel construction makes units cart washable. Shelves and brackets remove for washing. Weep holes at the cart's front corners and underside of door panels facilitate drainage and drying.



**Serviceable:** Double-panel door construction offers better strength and minimizes maintenance. Caster channels on each side of the cart allows individual replacement should a damaging situation occur. In the same situation, other models would have to replace the entire dolly.



**Castors—Stainless Steel:** one swivel lock, two swivel with brake, one swivel on 36" and 48" models; two swivel, two swivel with brake on other models.

- TPR wheels and stainless steel horn
- All stainless steel hardware and top plate
- Double race of stainless steel swivel ball bearings, greases sealed, dust cap with zerk fitting

Thermoplastic rubber wheel with rounded tread design provides a softer, quieter ride than traditional flat faced wheels. The non-marking material also resists flat spotting and repels floor debris.

- Delrin® self-lubricating bearing
- 1<sup>1</sup>/<sub>4</sub>" (32mm) rounded face
- 6" (152mm) diameter



# Flexline®



- Corrosion-proof, smooth, stain-resistant polymer surfaces with rounded corners make cleaning quick and thorough.
- Microban®\* antimicrobial product protection is built in every cart, inhibiting the growth of mold, mildew and bacteria.
- Available in pre-configured carts and build-a-cart components. To configure a cart to your exact specifications, visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

Flexline is constructed of advanced polymers, designed with rounded corners and infused with Microban antimicrobial product protection for a clean, durable solution that withstands the rigors of a laboratory environment.



\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.



LARProcedure  
Cat. No. **FLISO1**



General Storage  
Cat. No. **FLTMENT2**



LARProcedure — Tall  
Cat. No. **FLISO3**



General Storage  
Cat. No. **FLBED**

## Flexline Preconfigured Carts

Carts shown on the previous pages are configured with the components and accessories listed here.

### Accessories

Description	FLISO1	FLISO3	FLBED	FLTMENT1	FLTMENT2	FLCAST
3" (76mm) Drawer Divider Kit		1			2	1
6/9" (152/229mm) Drawer Divider Kit		3			2	1
Side Bin (1) — Non Locking	2					4
Waste Basket 28 Quart & Holder						X
Glove Box Holder — Triple		X				
Pull Out Side Shelf		X				X
Auto Lock Keyless Entry Touch Pad				X		
Overbridge with 2 Shelves						X
Description	FL-YL	FL-YL	FL-VL	FL-GR	FL-SB	FL-OR
36" (914mm) Cart — Passive Lock	X					
45" (1143mm) Cart — Passive Lock						X
45" (1143mm) Cart — Key Lock		X				
36" (914mm) Narrow Cart — Key Lock			X	X		
Drawer Pull Color						
Description	FL-YL	FL-YL	FL-VL	FL-GR	FL-SB	FL-OR
3" (76mm) Drawer		1	2	1	2	3
6" (152mm) Drawer	2		1	3	2	2
9" (229mm) Drawer	1	3	1		1	1



LARProcedure  
Cat. No. **FLTMENT1**



LARProcedure with  
Overhead Package  
Cat. No. **FLCAST**




### Basic Carts with Drawers



FLNK22100

Cart	Drawer Configuration	Lock	Drawer Pull Color	Cat. No.
36" (914mm) H Standard	2 - 3" (76mm)	Key Lock	Violet	<b>FLK21100</b>
	1 - 6" (152mm)			
	1 - 9" (229mm)			
36" (914mm) H Narrow	3 - 3" (76mm)	Key Lock	Pink	<b>FLNK32000</b>
	2 - 6" (152mm)			
39" (991mm) H Standard	3 - 3" (76mm)	Passive Lock	Red	<b>FLP31100</b>
	1 - 6" (152mm)			
	1 - 9" (229mm)			
42" (1067mm) H Narrow	2 - 3" (76mm)	Key Lock	Slate Blue	<b>FLNK22100</b>
	2 - 6" (152mm)			
	1 - 9" (229mm)			
42" (1067mm) H Standard	4 - 3" (76mm)	Passive Lock	Slate Blue	<b>FLP41100</b>
	1 - 6" (152mm)			
	1 - 9" (229mm)			
42" (1067mm) H Narrow	3 - 9" (229mm)	Key Lock	Dark Taupe	<b>FLNK00300</b>
45" (1143mm) H Standard	2 - 3" (76mm)	Passive Lock	Orange	<b>FLP22010</b>
	2 - 6" (152mm)			
	1 - 12" (305mm)			
45" (1143mm) H Narrow	1 - 3" (76mm)	Passive Lock	Green	<b>FLNP13100</b>
	3 - 6" (152mm)			
	1 - 9" (229mm)			

### Build-a-Cart

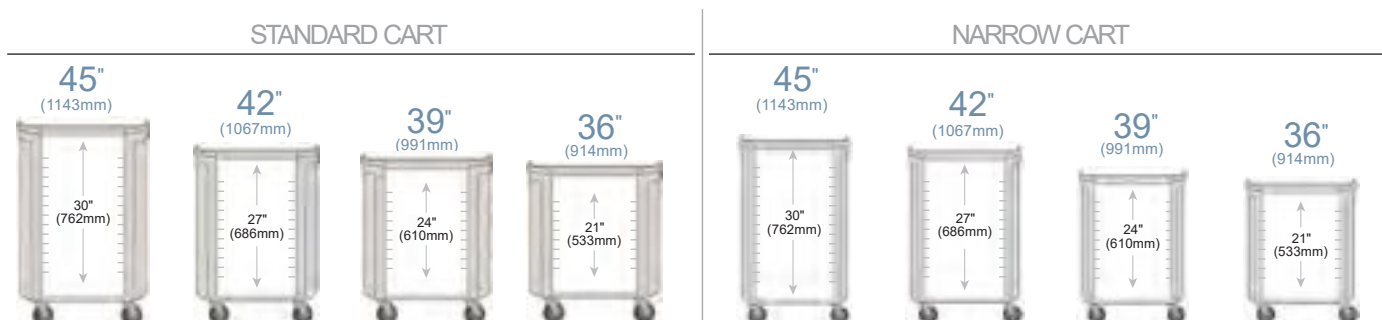

Nominal dimensions shown above

### Cart Bodies without Drawers

Width/Length/Height		Drawer Space		Lock	Width	Cat. No.
(in.)	(mm)	(in.)	(mm)			
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 35 <sup>1</sup> / <sub>8</sub>	568 x 819 x 892	21	533	Passive Lock	Standard	<b>FL21P</b>
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 38 <sup>1</sup> / <sub>2</sub>	568 x 819 x 978	24	610	Passive Lock	Standard	<b>FL24P</b>
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 41 <sup>7</sup> / <sub>8</sub>	568 x 819 x 1064	27	686	Passive Lock	Standard	<b>FL27P</b>
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 45 <sup>1</sup> / <sub>4</sub>	568 x 819 x 1149	30	762	Passive Lock	Standard	<b>FL30P</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 35 <sup>1</sup> / <sub>8</sub>	568 x 734 x 892	21	533	Passive Lock	Narrow	<b>FLN21P</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 38 <sup>1</sup> / <sub>2</sub>	568 x 734 x 978	24	610	Passive Lock	Narrow	<b>FLN24P</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 41 <sup>7</sup> / <sub>8</sub>	568 x 734 x 1064	27	686	Passive Lock	Narrow	<b>FLN27P</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 45 <sup>1</sup> / <sub>4</sub>	568 x 734 x 1149	30	762	Passive Lock	Narrow	<b>FLN30P</b>
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 35 <sup>1</sup> / <sub>8</sub>	568 x 819 x 892	21	533	Key Lock	Standard	<b>FL21K</b>
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 38 <sup>1</sup> / <sub>2</sub>	568 x 819 x 978	24	610	Key Lock	Standard	<b>FL24K</b>
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 41 <sup>7</sup> / <sub>8</sub>	568 x 819 x 1064	27	686	Key Lock	Standard	<b>FL27K</b>
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 45 <sup>1</sup> / <sub>4</sub>	568 x 819 x 1149	30	762	Key Lock	Standard	<b>FL30K</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 35 <sup>1</sup> / <sub>8</sub>	568 x 734 x 892	21	533	Key Lock	Narrow	<b>FLN21K</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 38 <sup>1</sup> / <sub>2</sub>	568 x 734 x 978	24	610	Key Lock	Narrow	<b>FLN24K</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 41 <sup>7</sup> / <sub>8</sub>	568 x 734 x 1064	27	686	Key Lock	Narrow	<b>FLN27K</b>
22 <sup>3</sup> / <sub>8</sub> x 28 <sup>7</sup> / <sub>8</sub> x 45 <sup>1</sup> / <sub>4</sub>	568 x 734 x 1149	30	762	Key Lock	Narrow	<b>FLN30K</b>

To configure a cart to your exact specifications, visit [www.metroconfigurator.com](http://www.metroconfigurator.com)


**FL400–FL403**

**FL101**

**FL102**

## Additional Security

Description	Cat. No.
Individual Drawer Seal Lock Bar — 36" (914mm) Cart	<b>FL400<sup>F</sup></b>
Individual Drawer Seal Lock Bar — 39" (991mm) Cart	<b>FL401<sup>F</sup></b>
Individual Drawer Seal Lock Bar — 42" (1067mm) Cart	<b>FL402<sup>F</sup></b>
Individual Drawer Seal Lock Bar — 45" (1143mm) Cart	<b>FL403<sup>F</sup></b>
Basic Keyless Entry Touchpad	<b>FL410<sup>F*</sup></b>
Basic Keyless Entry Touchpad with Auto Lock, Rechargeable	<b>FL411<sup>F*</sup></b>
Touchpad Charger Adapter Kit — Must use outside of North America††	<b>FL419A<sup>F</sup></b>
Full Feature Touchpad with LCD Screen, Auto Lock, USB Port	<b>FL420<sup>F*</sup></b>
Cart Management System Software — USB, Local	<b>FL421†</b>
Proximity Card Reader 125KHz HID for FL420	<b>FL430<sup>F**</sup></b>
Proximity Card Reader 13.56MHz HID for FL420	<b>FL430-13M<sup>F**</sup></b>
Magnetic Card Reader for FL420	<b>FL432<sup>F**</sup></b>

<sup>F</sup>Must be factory installed.

\*FL410, FL411, FL420 can only be ordered with a key locking cart.

\*\*Readers may not be compatible with all cards. **Sample card is required.** Contact your Metro representative.

†Available in U.S. and Canada only.

## Drawer, Shelf and Keyboard Shelf

Description	Cat. No.
Lockable Drawer Cover	<b>FL100<sup>F</sup></b>
3" (76mm) Pull Out Shelf	<b>FL101</b>
3" (76mm) Keyboard Tray	<b>FL102<sup>F</sup></b>
3" (76mm) Individual Electronic Locking Drawer for Narcotic Storage	<b>FL103KL<sup>F</sup></b>
3" (76mm) Individual Key Locking Drawer for Narcotic Storage	<b>FL103EL<sup>F**</sup></b>
3" (76mm) Drawer (No Drawer Pull)	<b>FL103</b>
6" (152mm) Drawer (No Drawer Pull)	<b>FL106</b>
9" (229mm) Drawer (No Drawer Pull)	<b>FL109</b>
12" (305mm) Drawer (No Drawer Pull)	<b>FL112</b>
Solid Bottom Shelf	<b>FL120</b>
Pediatric Code Response Drawer Pull Color Kit	<b>FL-PED9**</b>

<sup>F</sup>Must be factory installed.

\*Inside Drawer Dimensions — 20 1/4" W x 17" D. Heights: 2 1/4", 5 1/4", 8 1/4", 11 1/4".

\*\*For use only in carts configured with FL420.

## Drawer Pulls Colors

Order 1 drawer pull per drawer.

Description	Cat. No.	Description	Cat. No.
Drawer Pull — Cobalt	<b>FL-CB</b>	Drawer Pull — Slate Blue	<b>FL-SB</b>
Drawer Pull — Red	<b>FL-RD</b>	Drawer Pull — Violet	<b>FL-VL</b>
Drawer Pull — Orange	<b>FL-OR</b>	Drawer Pull — Pink	<b>FL-PK</b>
Drawer Pull — Green	<b>FL-GR</b>	Drawer Pull — White	<b>FL-WHT</b>
Drawer Pull — Yellow	<b>FL-YL</b>	Drawer Pull — Dark Taupe	<b>FL-TPE</b>

Color Disc Sample Kit  
FL-COLORKIT

## Lock Alert™ Touchpad Options

### FL410 —BasicKeylessEntry Touchpad

- No display touch pad that provides keyless entry, no auto relock
- No recharge required Battery is non-rechargeable, but replaceable
- Holds 1 user, 1 supervisor, 1 setup code
- Similar functionality as provided by mechanical locks

### FL411 —BasicKeylessTouchpad with Auto Relock

- Offers same options as FL410 with the addition of auto-relock mechanism that includes rechargeable batteries and charger

### FL420 —Full Feature Touchpad with USB

- USB port for PC upload & download
- LCD screen provides easy programming
- Optional 10 readers (proximity, magnetic, bar code)
- Low battery indicator — charge rechargeable batteries once a week for 6-8 hours
- Holds 1,998 user codes and 2,000 CS codes
- Separate controlled substance (CS) security for carts with optional keyless narcotic drawers
- Auto-relock with adjustable time (10-99 seconds or 1-99 minutes)
- Software packages that manages users. Configurations and views audit logs.

## Cart Management System Software

### FL421 —Cart Management System —USB,Local

Cart Management System USB software connects via USB and manages user ID's and views audit logs. Allows for tracing and tracking cart access errors


**FL410  
FL411**

**FL420**



FL303



FL314



LEC304, FL315



FL310



FL515, FL544



FL510, FL546, FL544

FL510, FL583, FL581,  
FL582, FL586

## Cart Accessories

Description	Cat. No.
Rear Accessory Mount Brackets — 1 Pair	FL301 <sup>F</sup>
Cord Manager 1/2" x 21 3/4" x 1 1/4" (13 x 554 x 31mm)	FL302
Defibrillator Strap Kit	FL303
Adjustable Defibrillator Tray 8 1/8"-14 1/4" x 14 1/2" (206-362 x 368mm)	LEC304
Medical Grade 4-Outlet Strip, 120V 15A, UL60601-01, 10' Cord, Cord Wrap	FL305-4US
Universal 6 Outlet Power Strip, 250 V 13A, CE, ROHS, 6' (183cm) Cord, Cord Wrap	See Below
Suction Pump Shelf 12 1/2" x 15 1/4" x 4 1/4" (320 x 384 x 108mm)	LEC306
Backboard with Front and Rear Assembly Kit	LEC307 <sup>F</sup>
Backboard with Front Assembly Kit	LEC308 <sup>F</sup>
Backboard with Back Assembly Kit	LEC309 <sup>F</sup>
Backboard with Rear Assembly Kit for use with an Overbridge	FL309-OB
Backboard with Back Assembly Kit for 36"H (914mm) FL21 Series Cart	FL309-21 <sup>F†</sup>
Backboard with Rear Assembly Kit for use with 36"H FL621 Series Cart with Overbridge	FL309-21OB
Articulating Arm — Laptop (Weight Capacity: 2-13 lbs. (.9-6kg))	FL310
Articulating Arm — Laptop Secure (Weight Capacity: 1-18 lbs. (.5-8.2kg))	FL310SEC
Articulating Arm — Monitor (Weight Capacity: 7.5-25 lbs. (3.4-10kg))	FL318A
Articulating Arm — Monitor (Weight Capacity: 2-13 lbs. (.9-6kg))	FL318-LD
Peel Pouch Container 3" x 6" x 18 1/4" (78 x 154 x 461mm)	FL312
Peel Pouch/Catheter Holder 3" x 6" x 27 3/8" (78 x 154 x 695mm)	FL313
Pull Out Side Shelf 12 1/2" x 30 1/2" x 3/8" (322 x 775 x 10mm)	FL314 <sup>F</sup>
2HK I.V. Pole with Cart Mount 1/2" x 9 1/8" x 37" (max.)*-25 1/4" (min.)* (38 x 232 x 940-640mm)	FL315
4HK I.V. Pole with Cart Mount 5" x 7 1/8" x 37" (max.)*-25 1/4" (min.)* (127 x 183 x 940-640mm)	FL317
I.V. Pole-mounted Sharp Brackets	LEC9800
Plastic Security Seals 100 Pack	LEC320
Backboard 24"L x 24"H x 5/16" (610 x 610 x 8mm)	LEC323

<sup>F</sup>Must be factory installed.

\*Max., Min. in relation to cart top.

<sup>†</sup>Must be ordered on a 36"H (914mm) cart to accommodate I.V. pole, defibrillator arm, articulating arm or outlet strip.

## Overbridges and Overbridge Accessories

Description	Cat. No.
Overbridge with Computer/Monitor Mounting Kit	FL505
Overbridge with 2 Hanger Rails 1 1/4" x 26 1/8" x 19 7/8"-25 1/2" (32 x 665 x 504-649mm)	FL510
Overbridge with Top Shelf and Hanger Rail	FL515
Overbridge with 2 Shelves	FL520
Tilt Bin 3 for Overbridge — 9 1/2" (241mm)H x 7 3/4" (197mm)W x 23 5/8" (600 mm)L	FL543
Tilt Bin 4 for Overbridge — 8 1/8" (206mm)H x 6 5/8" (168mm)W x 23 5/8" (600mm)L	FL544
Tilt Bin 6 for Overbridge — 4 1/2" (114mm)H x 3 5/8" (92mm)W x 23 5/8" (600mm)L	FL546
Hanger Rail	FL550
Overbridge Bottom Shelf 14 1/2" x 31" (368 x 787mm)	FL559
Overbridge Top Shelf 14 1/2" x 31" (368 x 787mm)	FL560
2HK I.V. Pole With Universal Clamp — for Overbridge	FL563
4HK I.V. Pole With Universal Clamp — for Overbridge 9 1/8" x 28 1/4" x 19 7/8"-25 1/2" (232 x 718 x 504-649mm)	FL566
Universal Clamp	FL570
Short Utility Hook 4 Pack (Holds Peel Pouches, I.V. Bags, Stethoscopes, etc.)	FL571*
4-Hook Rack (Holds Forceps and Scopes) 3 1/8" x 11" x 6" (98 x 282 x 151mm)	FL574
Laryngoscope Blade/Specimen Bag Holder (Holds Plastic Bag — Not Included — for Safe Storage of Contaminated Items) 3 3/4" x 7 1/2" x 5 1/8" (95 x 192 x 130mm)	FL575*
Chart Holder 4 3/4" x 11 1/2" x 9 1/4" (120 x 292 x 235mm)	FL576
Half-Size Utility Bin — 5 1/2"(140mm)H x 5 1/2"(140mm)W x 5 3/4"(146mm)L	FL581
Full-Size Utility Bin — 5 1/2"(140mm)H x 5 1/2"(140mm)W x 11 3/4"(292mm)L	FL582
Label/Tape Dispenser	FL583
Sharps Bracket Container	FL584*
Wire Supply Basket — 5"(127mm)H x 7"(178mm)W x 17"(432mm)L	FL585
Utility Bin with Cover (Pack of Six) 4 1/8"W x 7 3/8"L x 3"H (105 x 187 x 76mm)	FL586
Monitor Mounts for Overbridge with Bracket for Overbridge	FL590

\*Fits on universal clamp in addition to a hanger rail.





FL151



FL159



FL190(Label not included)

## Drawer Accessories

Description	Cat. No.
Divider Clip to Attach Loose Short Divider-end to Long Divider, 1 per Short Divider (Qty. 2)	T-CLIP
3" (76mm) Drawer Divider Kit (3 Long, 5 Short, 6 T-Clips)	FL113
Short Divider for LEC103 or FL103 5 Pack 6 <sup>7</sup> / <sub>8</sub> " L (175mm)	FL114
Long Divider for LEC103 or FL103 2 Pack 17 <sup>1</sup> / <sub>4</sub> " L (437mm)	FL115
6/9" (152/229mm) Drawer Divider Kit (2 Long, 5 Short)	FL116
Short Divider for LEC106 or FL106 5 Pack 8" L (205mm)	FL117
Long Divider for LEC106 or FL106 2 Pack 17 <sup>1</sup> / <sub>4</sub> " L (437mm)	FL118
Ampule Insert and 12 Divider for Top Cavity or 3" (76mm) Drawer Tray 15 <sup>1</sup> / <sub>4</sub> " x 4 <sup>7</sup> / <sub>8</sub> " (400 x 124mm)	FL131
Divider for FL131, 12 Pack 5" L (125mm)	FL132
3" (76mm) Egg Crate-Style Drawer Divider Kit (Qty. 10 Vertical, 5 Horizontal)	FL141
6" (152mm) Egg Crate-Style Drawer Divider Kit (Qty. 10 Vertical, 5 Horizontal)	FL142
Short Divider for FL141 — Qty. 5 each 10" L (256mm)	FL143
Long Divider for FL141 — Qty. 5 each 17 <sup>1</sup> / <sub>8</sub> " L (436mm)	FL144
Short Divider for FL142 — Qty. 5 each 10" L (256mm)	FL145
Long Divider for FL142 — Qty. 5 each 17 <sup>1</sup> / <sub>8</sub> " L (436mm)	FL146
3" (76mm) Drawer Tray Approx. 20" x 16" (508 x 381mm) with 6 Dividers	FL151
4 Short, 2 Long, Sheet of Blank Labels, 5 Security Bags	
Lid for 3" and 6" (76mm and 152mm) Drawer Tray (Fits FL151 and FL159)	FL158
6" (152mm) Drawer Tray Approx. 19" x 15" (483 x 381mm) with Dividers 6 Short, 2 Long, 5 Security Bags	FL159
Long Divider Rails for LEC143 or FL151 2 Pack 15 <sup>1</sup> / <sub>2</sub> " L (394mm)	FL163
Short Divider for LEC143 or FL151 10 Pack 6 <sup>7</sup> / <sub>8</sub> " L (175mm)	FL164
Long Divider for FL159 (2 Pack) 14 <sup>3</sup> / <sub>4</sub> " L (375mm)	FL166
Short Divider for FL159 (3 Pack) 8" L (205mm)	FL167
Security Bags for 3" (76mm) Tray and 6" (152mm) Tray 20 Pack 21 <sup>3</sup> / <sub>4</sub> " D x 25 <sup>1</sup> / <sub>8</sub> " L (552mm x 638mm)	FL183
Label Holder Set of 10 13 <sup>5</sup> / <sub>8</sub> " L (346mm)	FL190



FL237



FL235

## Side/Recessed Storage Accessories

Description	Cat. No.
Side Bin (1) — Locking 4 <sup>1</sup> / <sub>2</sub> " x 16 <sup>3</sup> / <sub>4</sub> " x 8 <sup>1</sup> / <sub>2</sub> " (117 x 426 x 216mm)	FL211*F
Side Bin (1) — Non-Locking 4 <sup>1</sup> / <sub>2</sub> " x 16 <sup>3</sup> / <sub>4</sub> " x 8 <sup>1</sup> / <sub>2</sub> " (117 x 426 x 216mm)	FL212
Waste Basket 28 Quart and Holder 14 <sup>1</sup> / <sub>2</sub> " x 10 <sup>7</sup> / <sub>8</sub> " x 15 <sup>3</sup> / <sub>8</sub> " (370 x 275 x 390mm)	FL221
Waste Basket 28 Quart	FL222
Bracket with Velcro for Waste Basket or Large Sharps Container	FL223
O <sub>2</sub> Tank Holder — All Size Carts — 5 <sup>1</sup> / <sub>2</sub> " (140mm) Diameter Tank	FL234-5
O <sub>2</sub> Tank Holder — All Size Carts — 4" (102mm) Diameter Tank	FL234
O <sub>2</sub> Tank Holder — 45" (1140mm)H Cart — 5 <sup>1</sup> / <sub>2</sub> " (140mm) Diameter Tank	FL235-5
9 <sup>3</sup> / <sub>8</sub> " x 5 <sup>1</sup> / <sub>2</sub> " x 19 <sup>1</sup> / <sub>4</sub> " (238 x 144 x 489mm)	
O <sub>2</sub> Tank Holder — 45" (1140mm)H Cart — 4" (102mm) Diameter Tank	FL235
9 <sup>3</sup> / <sub>8</sub> " x 6 <sup>3</sup> / <sub>4</sub> " x 19 <sup>1</sup> / <sub>4</sub> " (238 x 172 x 489mm)	
Glove Box Holder — Single 4" x 10 <sup>1</sup> / <sub>8</sub> " x 6 <sup>3</sup> / <sub>8</sub> " (101 x 258 x 162mm)	FL236
Glove Box Holder — Triple 4" x 10 <sup>1</sup> / <sub>8</sub> " x 18 <sup>3</sup> / <sub>8</sub> " (101 x 258 x 466mm)	FL237
Scope Cabinet, 2 — Hook 10 <sup>3</sup> / <sub>8</sub> " x 9" x 48" (264 x 229 x 1219mm)	FL245**
Scope Cabinet, 4 — Hook 10 <sup>3</sup> / <sub>8</sub> " x 16" x 48" (264 x 406 x 1219mm)	FL246**
Sharps Container Bracket with Velcro® Straps — Non-Locking 9 <sup>1</sup> / <sub>2</sub> " x 3 <sup>1</sup> / <sub>4</sub> " x 9 <sup>5</sup> / <sub>16</sub> " (241 x 83 x 237mm)	FL250
Lockable Sharps Container 4 <sup>3</sup> / <sub>4</sub> " x 13" x 19 <sup>7</sup> / <sub>8</sub> " (with Glove Box) x 11 <sup>3</sup> / <sub>8</sub> " (without Glove Box)	FL251
(121 x 330 x 505 or 302mm)	
Replacement Containers for FL251 — 20 5 Qt. containers	FL252
Side Mounted Chart Holder 4 <sup>1</sup> / <sub>4</sub> " x 11 <sup>1</sup> / <sub>2</sub> " x 9 <sup>1</sup> / <sub>4</sub> " (120x292x235mm)	FL576



FL236, FL221



FL212

\*Locking bins for keylock cart are available on the right. Locking bins for the passive lock cart are available on the left. Bins are not compatible for "narrow" cart.

\*Must be factory installed prior to shipment.

\*\*For use on 45" H (1143mm) carts only.



## Build-a-Cart

### Cart Bodies without Drawers

Width/Length/Height (in.)	Width/Length/Height (mm)	Drawer Space (in.)	Drawer Space (mm)	Lock	Battery	Keyboard Mount	Width	Cat. No.
22 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 41 <sup>7</sup> / <sub>8</sub>	568 x 819 x 1064	24	610	Key Lock	Li-Nano	Keyboard Tray	Standard	FL27K-KL**
23 <sup>3</sup> / <sub>8</sub> x 32 <sup>1</sup> / <sub>4</sub> x 45 <sup>1</sup> / <sub>4</sub>	568 x 819 x 1149	27	686	Key Lock	Li-Nano	Keyboard Tray	Standard	FL30K-KL**

\*Powered carts support all-in-one computers.

\*\*Powered cart shells come with a keyboard tray.



Nominal dimensions shown above

### Drawers

Description	Cat. No.
3" (76mm) Individual Locking Drawer for Narcotics Storage — Key Lock Cart	FL103KL* <sup>F</sup>
3" (76mm) Individual Locking Drawer for Narcotics Storage — Electronic Lock Cart	FL103EL* <sup>F</sup>
3" (76mm) Drawer (No Drawer Pull)	FL103*
6" (152mm) Drawer (No Drawer Pull)	FL106*
9" (229mm) Drawer (No Drawer Pull)	FL109*
12" (305mm) Drawer (No Drawer Pull)	FL112*

\*Flexline standard drawer pull colors available.

<sup>F</sup>Must be factory installed prior to shipment.

### Power Converters

Description	Cat. No.
Power Converter (12V Output)	FLCNVTR-12
Power Converter (19V Output)	FLCNVTR-19
Power Converter (24V Output)	FLCNVTR-24

### Power Cord

Description	Cat. No.
Starsys/Flexline 8' (2.4m) Power Cord — US	SXFL-CORD-B
Starsys/Flexline 8' (2.4m) Power Cord — Euro	SXFL-CORD-C
Starsys/Flexline 8' (2.4m) Power Cord — UK	SXFL-CORD-G
Starsys/Flexline 8' (2.4m) Power Cord — Swiss	SXFL-CORD-J
Starsys/Flexline 8' (2.4m) Power Cord — Aus	SXFL-CORD-I

### Power Tip Kits

Description	Cat. No.
DC Power Cable, 5.5mmx2.5mmx5.5mmx2.1mmx42" Long	SXFL-TIP-01
DC Power Cable, 5.5mmx2.5mmx5.5mmx2.5mmx42" Long	SXFL-TIP-02
DC Power Cable, 5.5mmx2.5mmx4.65mmx1.65mmx42" Long	SXFL-TIP-03
DC Power Cable, 5.5mmx2.5mmx7.9mmx5.5mmx42" Long	SXFL-TIP-04
DC Power Cable with Center Pin, 5.5mmx2.5mmx7.4mmx5mmx42" Long	SXFL-TIP-05
DC Power Cable, 5.5mmx2.5mmx4.65mmx1.65mmx42" Long	SXFL-TIP-06

### Computer and Computer Accessories

Description	Cat. No.
Mini Computer — Intel i5 2.9GHz, 8GB RAM, 240GB SSD, Win10Pro 64Bit	COMP-MINITGI
All-in-One Computer, Medical Grade 24" Touchscreen, Intel i5 2.9GHz, 8GB RAM, 240GB SSD, Win10Pro 64Bit	COMP-AIOTGM24
All-in-One Computer, Medical Grade 24" Screen, Swappable Battery Ready, Intel i5 2.2GHz Dual, 8GB RAM, 500GB HDD, Win10Pro 64Bit	COMP-AIOTGT24
Battery Charger for T24 Swappable Battery, 4 Bay	COMP-CHRGTTGT24
Swappable Battery for T24 All-in-One Computer, Qty. 3	COMP-BATT3TGT24
Optical Scroll Mouse, USB	COMP-MSE
Waterproof Medical Antimicrobial Scroll Mouse, Black, USB	COMP-MSEAW
15.2" L Ultra X-Slim Keyboard, White, USB	COMP-KB15
Antimicrobial Keyboard Cover for KB15	COMP-KB15CVR
18.1" L Waterproof Antimicrobial Keyboard, White, USB	COMP-KB18AW
14.7" L Antimicrobial Cleanable Sealed Keyboard, White, USB	COMP-KB15AC
22" LED DC Monitor 1920 x 1080 with Privacy Screen, Cables	COMP-MON22PS
22" LED DC Monitor 1920 x 1080 with Privacy Screen, Internal Speaker, Cables	COMP-MON24PS

### Computer Mounting Options

Description	Cat. No.
Monitor Arm Mounting (7.5-25 lbs.)	FL318
Overbridge Computer/Monitor Mounting Kit (Overbridge, Rail, Bracket & Cord Holder)	FL505
Corrugated Wire Cord Management 42"L (1067mm)	FLWLOOM



FL505



FL318



SXFLKBRDA

## Clinical Integrated Technology

Many applications in healthcare today are utilizing a form of technology. Applications that are integrating technology into their process need a cart that can accommodate those components. The needs can range from a simple hospital grade strip and articulating laptop arm, to a fully integrated solution with onboard power and a full complement of technology accessories.

### Features Include:

- Articulating arm options to hold laptops, tablets, LCD monitors, and all-in-one computers
- Overbridge computer monitor mounting options
- Retractable keyboard tray
- Available with narcotic drawer option
- Premium power supply supporting all-in-one computers
- Internal/external wire management protects cords from snags and damage
- Automatic electronic locking system



Cat. No. **FLTMENT-KL**  
Computerized Treatment Package  
(All-in-one computer, keyboard, mouse and power supply included)



Cat. No. **FLCOM-LT**  
Computer Package  
(Laptop, mouse, keyboard, and power supply not included)

Power offering is transitioning in 2019. Call to verify current offering and part numbers.



Cat. No. **FLANES-KL**  
Computerized Anesthesia Package  
(All-in-one computer, keyboard, mouse, power supply, and CS drawer included)

## Accessories

Cat. No.	Description
<b>FL420</b>	Lock Alert VI — Auto Lock
<b>FL113</b>	3" Drawer Divider Kit
<b>FL116</b>	6/9" Drawer Divider Kit
<b>FL211</b>	Side Bin (1) — Locking
<b>FL212</b>	Side Bin (1) — Non Locking
<b>FL251</b>	Lockable Sharps Container
<b>FL310</b>	Laptop Articulating Arm (1-14 lbs.)
<b>FL313</b>	Peel Pouch/Catheter Holder
<b>FL314</b>	Pull Out Side Shelf
<b>FL505</b>	Flexline Overbridge Computer/Monitor Mounting Kit (Overbridge, Rail, Bracket, & Cord Extrusion)
<b>FL546</b>	Tilt Bin 6 For Overbridge

## Computer Accessories

Cat. No.	Description
<b>COMP-AIOTGM24</b>	All-in-One Computer, Medical Grade 24" Touchscreen
<b>FLCNVTR-19</b>	Power Converter (19V Output)
<b>SXFL-TIP-01</b>	Power Tip Kit, 5.5mm x 2.5mm x 5.5mm x 2.1mm x 42" Long
<b>SXFL-CORD-B</b>	US Power Cord
<b>COMP-KB15</b>	15.2" L Keyboard, White, USB
<b>COMP-MSE</b>	Optical Scroll Mouse, USB
<b>COMP-KB15CVR</b>	Antimicrobial Cover for KB15

## Carts

Cat. No.	Description
<b>FL27K</b>	Flexline 42" (1067mm) Cart, Key Lock
<b>FL27K-KL</b>	Flexline 42" (1067mm) Cart, Key Lock, Keyboard Tray and Lithium Nano Power
<b>FL30K-KL</b>	Flexline 45" (1067mm) Cart, Key Lock, Keyboard Tray and Lithium Nano Power
<b>FL-</b>	Drawer Pull Color

## Drawers

Cat. No.	Description
<b>FL102</b>	Keyboard Tray
<b>FL103</b>	3" FL Drawer — No Drawer Pull
<b>FL106</b>	6" FL Drawer — No Drawer Pull
<b>FL109</b>	9" FL Drawer — No Drawer Pull
<b>FL103EL</b>	3" Narcotics Box, Individual Locking Drawer — No Drawer Pull





pg. 12

# MetroMax® Forever Shelving.



## MetroMax® i Lab Storage Cart

- **100%Corrosion Proof**—The ultimate storage and transport system: Engineered polymers and Type 304 stainless are warranted against rust and corrosion for the life of the product.
- **Microban®\* antimicrobial product protection**—A Metro exclusive—is built into all shelves and touch points, inhibiting the growth of mold, mildew, and bacteria.
- **Cleanable**—Lift off grid and solid shelf mats are sized to fit into a sink making cleaning easy.
- **Flexible**—A range of shelf sizes, post heights and accessories allow you to “customize” the system to fit your requirements.

pg. 36

## Super Adjustable Super Erecta® Shelving

- **Adjustability:** Shelves can be quickly and easily with the flip of a finger.
- **Open-wire Construction:** Minimizes dust accumulation and allows a free circulation of air, greater visibility and light penetration.
- **Available in** Type 304 stainless steel, durable chrome-plated and Metroseal 3 (corrosion resistant epoxy).



Safely Hold up to  
**800 lbs.**  
per shelf.

Safely Hold up to  
**900 lbs.**  
per mobile unit.



\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.

# High-density track systems.

pg. 107

Choose overhead or floor track, wire or rust-proof polymer systems.

## Wall-Mounted Shelving

An ideal method for storing items overhead or above work surfaces.

pg. 82



MXIV1

## MetroMax® i Gown and Bootie Storage

Baskets have semi-open front for easy access. Dividers adjust horizontally within the basket to accept various sizes. Continuous label holders identify basket contents.

Description	Height/Width/Length (in.)	Height/Width/Length (mm)	Total Baskets Per Cart	Casters	Cat. No.
Open Cart	24x24x60	610x610x1524	4	*	<b>MXIV1</b>
Open Cart with Top Shelf	24x24x69	610x610x1753	4	*	<b>MXIV2</b>
Open Cart	24x42x60	610x1066x1524	8	†	<b>MXIV4</b>
Open Cart with Top Shelf	24x42x69	610x1066x1753	8	†	<b>MXIV5</b>
Open Cart	24x60x60	610x1524x1524	12	†	<b>MXIV6</b>
Open Cart with Top Shelf	24x60x69	610x1524x1753	12	†	<b>MXIV7</b>

\*Four 5" (127mm) poly casters; two swivel, two with brakes.

†5" (127mm) poly casters on dolly frame; two swivel, one swivel with brake, and one rigid.

## Accessories

Description	Size (in.)	Size (mm)	Cat. No.
Basket* with Label Holder	18 1/2 x 24 1/2 x 10	470 x 622 x 254	<b>IVB1</b>
Divider	9	229	<b>IVBD</b>

\*Basket weight capacity is 35 lbs. (16kg). Finish is epoxy; color is taupe.

## Garment Rack — Upright and Wall Mount — {58.15}

Racks are designed to provide efficient storage of Cleanroom garments. Hangers are spaced at 3" (75mm) intervals. Electro-polished, Type 304 stainless steel hangers are included.

- Type 304 stainless steel construction throughout.
- Open-wire design promotes laminar air flow.
- Adjustable stainless steel leveling feet provide floor mount or free standing option.
- Unique hanger capture mechanism and hanger design provide theft deterrence.

### Upright

Width/Length (in.)	Width/Length (mm)	No. of Hangers	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
24x36	610x914	11	27	12.25	<b>GRU2436S</b>
24x48	610x1219	15	36	16.25	<b>GRU2448S</b>
24x60	610x1524	19	45	20.5	<b>GRU2460S</b>
24x72	610x1825	23	54	24.5	<b>GRU2472S</b>

### Wall Mount

Width/Length (in.)	Width/Length (mm)	No. of Hangers	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
24x36	610x914	11	20	9	<b>GRW2436S</b>
24x48	610x1219	15	22 1/2	10.2	<b>GRW2448S</b>
24x60	610x1524	19	27 1/2	12.5	<b>GRW2460S</b>
24x72	610x1825	23	32	14.5	<b>GRW2472S</b>

## Gowning Bench — {58.15}

Heavy-duty, solid top bench provides a sturdy and comfortable gowning fixture.

- Top is manufactured from 14 gauge, Type 304 stainless steel.
- Stainless steel footplates provide floor mount or free-standing option.



Gowning Bench

Width/Length (in.)	Width/Length (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
16x36	406x914	47 1/2	21.5	<b>GB1636S</b>
16x48	406x1219	55	25	<b>GB1648S</b>
16x60	406x1524	62 1/2	28.4	<b>GB1660S</b>
16x72	406x1825	70	31.8	<b>GB1672S</b>

✓ Indicates antimicrobial product.



## Super Erecta® Shelf All-Stainless Solid Shelving

- Solid shelving is available in four widths and six lengths.
- All-stainless, 18-gauge steel construction with  $\frac{1}{8}$ " (3mm) ship's edge detail helps contain spills.
- All-stainless design, including stainless cast corners, can be used in cart wash and autoclave environments. Refer to autoclave guidelines on page 175.
- New accessories include high-temperature autoclave casters and autoclave cart covers.



All stainless solid shelf with stainless corners

## Solid Shelves

Width/Length (in.) (mm)	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No. Stainless
14x24 355x610	10 4.5	1424NFS
14x30 355x760	12 5.4	1430NFS
14x36 355x914	14 6.4	1436NFS
14x42 355x1066	15 6.8	1442NFS
14x48 355x1219	17 7.7	1448NFS
14x60 355x1524	22 9.9	1460NFS
18x24 457x610	11 5.0	1824NFS
18x30 457x760	14 6.4	1830NFS
18x36 457x914	16 7.3	1836NFS
18x42 457x1066	18 8.2	1842NFS
18x48 457x1219	20 9.1	1848NFS
18x60 457x1524	24 10.9	1860NFS
21x24 530x610	13 5.9	2124NFS
21x30 530x760	15 6.8	2130NFS
21x36 530x914	18 8.2	2136NFS
21x42 530x1066	21 9.5	2142NFS
21x48 530x1219	23 10.4	2148NFS
21x60 530x1524	26 11.8	2160NFS
24x24 610x610	15 6.8	2424NFS
24x30 610x760	17 7.7	2430NFS
24x36 610x914	19 8.6	2436NFS
24x42 610x1066	21 9.5	2442NFS
24x48 610x1219	24 10.9	2448NFS
24x60 610x1524	31 14.0	2460NFS

**Important:** When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible.

**Note:** Demo corner sample can be obtained by ordering Cat. No. DEMO-NFS.



## Stainless Steel Shelf Ledges

Sturdy 4" (101mm) ledges contain items on shelves. Spring-clip tabs included for attachment.

Fits Shelf Length (in.) (mm)	Approx. Pkd.Wt. Per 6 Pieces (lbs.) (kg)	Cat. No. Stainless
14 355	7½ 3.4	L14WS
18 457	9 4.1	L18WS
21 530	10½ 4.7	L21WS
24 610	12 5.4	L24WS
30 760	13½ 6.0	L30WS
36 914	16½ 7.4	L36WS
42 1066	19½ 8.7	L42WS
48 1219	22½ 10.1	L48WS
60 1524	30 13.5	L60WS

\*Actual ledge length is approximately 1" (25mm) shorter than nominal shelf length/width.



4" (101mm) Ledges

## Stainless Steel Shelf Dividers

The easy way to keep shelves orderly. Eight inch (203mm) high dividers attach with spring clips (provided).


Fits Shelf Length (in.) (mm)	Approx. Pkd.Wt. Per 6 Pieces (lbs.) (kg)	Cat. No. Stainless
18 457	13½ 6.0	DD18FS
24 610	16½ 7.4	DD24FS



Shelf Dividers

## A. SiteSelect Posts for Stationary Shelving Applications

Combine required shelf sizes from previous page with stainless posts (4 required), below. Stainless posts are fitted with adjustable stainless steel leveling bolts to compensate for uneven surfaces.



SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are double-grooved every 8" (203mm) for easy identification.

Height*		Approx. Pkd. Wt.		Cat. No. Stainless
(in.)	(mm)	(lbs.)	(kg)	
14 1/2	370	1	0.5	13PS
27 1/2	700	1 3/4	0.75	27PS
34 1/2	875	2	0.9	33PS
54 9/16	1385	3	1.4	54PS
62 9/16	1590	3 1/2	1.6	63PS
74 5/8	1895	4	1.8	74PS
86 5/8	2200	5	2.3	86PS

\*Height includes leveling bolt and cap.

## B. SiteSelect Posts for Mobile Applications

Combine required shelf sizes from previous page with stainless mobile posts (4), below. Mobile posts accept a wide range of Metro stem casters.

Height		Approx. Pkd. Wt.		Cat. No. Stainless
(in.)	(mm)	(lbs.)	(kg)	
27 1/2	699	1 3/4	0.75	27UPS
33 7/8	861	2	0.9	33UPS
54	1370	3	1.4	54UPS
62	1575	3 1/2	1.6	63UPS
74	1880	4	1.8	74UPS
86	2185	4.5	2.0	86UPS

These posts come without leveling bolt assembly to accommodate stem casters.

## C. Site-Select Posts for Cart Wash (Mobile) Applications

Combine required shelf sizes with stainless swaged posts (4), below. Stainless steel cart washable casters are required for cart wash applications.

### Swaged Posts

Description	Dimensions		Cat. No.
	(in.)	(mm)	
Stem Caster Post	33	875	33UPS-SW
Stem Caster Post	54	1370	54UPS-SW
Stem Caster Post	63	1600	63UPS-SW

## Stainless Steel Cart-Washable Stem Casters

Stem casters are shipped with donut bumpers.



5MDGSA

Wheel Diameter		Face	(in.)	(mm)	Load Rating		Type	Wheel/Tread	Approx. Pkd. Wt.		Cat. No.
(in.)	(mm)				(lbs.)	(kg)			(lbs.)	(kg)	
5	127	1 1/4	32		150	68	Swivel	High Modulus	2 1/2	1.1	5MDGSA
5	127	1 1/4	32		150	68	Brake	High Modulus Donut	2 5/8	1.17	5MDBGSA
5	127	1 1/4	32		150	68	Rigid	High Modulus Donut	2 3/8	1.08	5MDRGSA
5	127	1 1/4	32		300	135	Swivel	Polyurethane	2 1/8	.94	5MPGSA
5	127	1 1/4	32		300	135	Brake	Polyurethane	2 1/4	1	5MPBGSA
5	127	1 1/4	32		300	135	Rigid	Polyurethane	2	.9	5MPRGSA


Note 1: Load Height for all 5MD and 5MP casters — 6 3/32" ± 1/16" (155 ± 1.5mm).

Note 2: All casters are grease sealed with zerk fittings in swivel and axle.

Note 3: Brakes are foot-operated.

## D. SiteSelect Posts for Autoclave (Mobile) Applications

Combine required shelf sizes from previous page with stainless swaged posts (4 required), above. Aluminum split sleeves (Cat. No. 9986S) must be used for autoclave applications. High temperature stem casters must be selected from chart below.



9986S

### Aluminum Split Sleeves

Improved design is easy to install. For high temperature, over the road, or conductive applications. Stainless steel retainer rings included. One bag required per shelf; 4 pairs per bag.

		Cat. No.
Aluminum Split Sleeves with Stainless Rings		9986S



5MHTP



5MHTPB



5MHTN



5MHTNB

### High-temperature Autoclave Stem Casters

Type	Wheel/Tread	Load Rating	Cat. No.
Swivel	Hi-temp Phenolic	300	5MHTP
Brake	Hi-temp Phenolic	300	5MHTPB
Swivel	Hi-temp Nylon	300	5MHTN
Brake	Hi-temp Nylon	300	5MHTNB

Note: Casters are temperature rated for up to 300°F (149°C)

## D. For Autoclave (Mobile) Applications (continued)

### Autoclavable Cage Racks

- Preconfigured, autoclavable cage racks available in two footprints — 18x60 (457x1524mm) and 24x60 (610x1524mm).
- Units are 69" (1753mm) high, including casters. **Casters must be ordered separately.**
- Carts come standard with swaged posts and aluminum split sleeves.

Width/Length/Height (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Description	Cat. No.
18x60x69	457x1524x1753	136	61.7	5-shelf, 18" (457mm) wide cage rack	LC5S1860
24x60x69	610x1524x1753	166	75.3	5-shelf, 24" (610mm) wide cage rack	LC5S2460

**Note:** To build a cage rack according to specific requirements, follow instructions (D) on previous page. Refer to Autoclave guidelines, below, for important checklist to follow.



LC5S2460  
(casters sold separately)

### Autoclave Cage Rack Covers

Width/Length/Height (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Description	Cat. No.
20x62x61.5	508x1575x1562	6.0	2.7	Autoclavable cart cover for 18" (457mm) wide Cage Rack	LC1860AC
26x62x61.5	660x1575x1562	7.0	3.2	Autoclavable cart cover for 24" (610mm) wide Cage Rack	LC2460AC

**Note:** Autoclave cart covers are rated for approximately 70 cycles per cover. Color may vary from image shown.



LC5S2460 with  
autoclave cart cover  
(casters sold separately)

### Autoclavable Lab Carts

- Preconfigured, autoclavable Lab carts are available in two footprints — 18x24 (457x610mm) and 24x36 (610x914mm).
- Choose between 2- and 3-shelf models
- Units are 39" (991mm) high, including casters. **Casters must be ordered separately.**
- Carts come standard with swaged posts and aluminum split sleeves.

Width/Length/Height (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Description	Cat. No.
18x24x39	457x610x991	25.0	11.3	2-shelf, 18" (457mm) wide Lab cart	LC2S1824
18x24x39	457x610x991	37.5	17.0	3-shelf, 18" (457mm) wide Lab cart	LC3S1824
24x36x39	610x914x991	46.5	21.1	2-shelf, 24" (610mm) wide Lab cart	LC2S2436
24x36x39	610x914x991	65.5	29.7	3-shelf, 24" (610mm) wide Lab cart	LC3S2436

**Note:** To build a lab cart according to specific requirements, follow instructions (D) on previous page. Refer to Autoclave guidelines, below, for important checklist to follow.



LC2S1824  
(casters sold separately)

### Autoclave Lab Cart Covers

Width/Length/Height (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Description	Cat. No.
20x26x33.5	508x660x851	3.0	1.4	Autoclavable cart cover for 18" (457mm) wide Cage Rack	LC1824AC
26x38x33.5	660x965x851	3.5	1.6	Autoclavable cart cover for 24" (610mm) wide Cage Rack	LC2436AC

**Note:** Autoclave cart covers are rated for approximately 70 cycles per cover.

Seepage 190 for Caster Selection.

### Autoclave Application Guidelines

When stainless solid shelving, as part of a mobile shelving unit, is used in an autoclave, the following Metro product guidelines are recommended to ensure optimal product performance and longevity:

Stainless, swaged posts with aluminum post caps must be utilized [part numbers 33/54/63UPS-SW]

Aluminum split sleeves [part number 9986S] with stainless rings should be used to mount solid stainless shelves.

Select either hi-temp phenolic casters or hi-temp nylon casters for application. These casters are designed specifically for autoclave environments. Bumpers should not be used as they are not designed to withstand autoclave temperature ranges.





Feed Cart  
(One Tote Capacity)



Feed Cart  
(Two Tote Capacity)



Cover Holder (shown mounted on  
Cart with one Tote Cover)

## Lab Animal Feed (LAR) Carts — {52.05}

LARFeedCarts are designed to store and transport animal feed. Stainlesssteel finish provides superior corrosion resistance, while compact footprint makes it easy to maneuver in and around tight lab spaces. Tote with snap-on cover included.

- Super Erecta® Shelf construction makes units easy to assemble with absolute rigidity, and makes relocation of shelves quick and simple.
- Wire Shelves: Bright, modern, sanitary appearance. Open construction minimizes dust accumulation, maximizes visibility and air circulation.

Width (in.) (mm)	Length (in.) (mm)	Height (in.) (mm)	Rating¹ (lbs.) (kg)	Description	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
18 457	24 610	38 965	375 171	Light-duty feed cart One tote capacity/shelf 4" (102mm) resilient casters²	42 18.7	<b>LAR1</b>
24 610	36 914	39 990	600 273	Heavy-duty feed cart Two tote capacity/shelf 5" (127mm) resilient casters²	65 29.2	<b>LAR2</b>

¹Cart load rating listed is based on an evenly distributed load.

²Cat. No. LAR1 features four L4D series swivel casters with resilient rubber tread. Cat. No. LAR2 features four 5M series swivel casters with rubber tread.

Refer to next page for information on Metro's Polymer LARFeedCarts.

## Accessories

Durable, Metro totes provide clean and secure storage for animal feed. Totes are injection-molded from polypropylene material, are stackable, and can be combined with snap-on covers and cardholders for security and identification of contents.

### White Tote Box

Outside Dimensions Length/Width/Height		Inside Dimensions Length/Width/Height		Cat. No. White Polypropylene
Top (in.)	Bottom (mm)	Top (in.)	Bottom (mm)	
22.5x17.5x12	572x445x305	21x16	533x406	<b>MTB93120W</b>

**Note 1:** All outside dimensions have an overall tolerance of (+/-) .050". All inside dimensions have an overall tolerance of (+/-) .100"

**Note 2:** Tote not recommended for freezer environments (temperatures lower than -20°F [-29°C]).

### White Snap-on Cover

Outside Dimensions		Cat. No.
Length (in.) (mm)	Width (in.) (mm)	
22.5 572	17.5 445	<b>CO93000W</b>

### Tote Box Cardholders

Material	Inside Dimensions		Cat. No.
	Length (in.) (mm)	Height (in.) (mm)	
Polypropylene	4.5 114.3	8 203	<b>OP2501CLR</b>
Polypropylene	2 <sup>11/16</sup> 60.6	5 127	<b>OP2535CLR</b>

### Cover Holder

Stainlesssteel wire cover holder provides a convenient storage option for tote box covers when not in use. Accessory easily mounts on any Super Erecta® based wire shelf.

Width (in.) (mm)	Length (in.) (mm)	Depth (in.) (mm)	Approx. Carton Wt. (lbs.) (kg)	Cat. No.
18 <sup>1/2</sup> 470	18 <sup>1/4</sup> 464	4 101	6 2.7	<b>LAR-CH</b>

\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.

**Metro Bulk Feed Cart — {13.37}**

- Usefor bulk animal feed storage.
- Featuresuniquepatented multi-position lid which opensto 19½"x12" (495x305mm).
- Double wall and deep insulation will hold ice for extended periods.
- Rustand corrson-proof polymer construction. Large rear wheels and front swivel castersfor easymobility.

Width/Depth/Height (in.)	Width/Depth/Height (mm)	Capacity (lbs.)	Capacity (kg)	Casters	Cat. No.
22½x28½x33½	572x718x851	125	57	8" (203mm) rear; 5" (127mm) front (1 locking)	IC125




Feed Cart

Don't experiment,  
keep it off the floor.



Bow-Tie Dunnage Rack

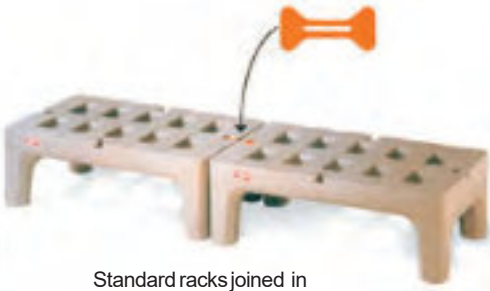

Standard racks joined in "end-to-end" configuration.

**Bow-Tie™ Dunnage Racks — {9.09}**

12" (305mm) high; 22" (559mm) wide.

- Metro Bow-TieDunnageRacksareavailablewith built-in Microban® antimicrobial product protection to protect from bacteria,mold, mildew and fungi that cause odors, stains and product degradation. Standard models, without Microban, are also available.
- Rustand corrosion-proof polymer material.
- Helps protect floors: legs have a larger radius than traditional dunnage racksand distribute the storage load acrossa wider area.
- Racksjointogether easilywithout tools in "end-to-end" and "back-to-back" configurations with the exclusiveBow-Tie™ feature.
- Heavy-dutyconstruction givesracks the strength to hold up to 1,500 lbs. (683kg) for 30" (760mm) and 36" (914mm) long racks,and 3,000 (1365kg) for 48" (1219mm) and 60" (1524mm) racks.

Length (in.)	Length (mm)	Height (in.)	Height (mm)	Approx. Pkd.Wt. (lbs.)	Approx. Pkd.Wt. (kg)	Capacity (lbs.)	Capacity (kg)	Cat. No. Microban®	Cat. No. Standard
30	760	12	305	24	10.8	1500	68	HP2230PDMB	HP2230PD
36	914	12	305	26	11.7	1500	68	HP2236PDMB	HP2236PD
48	1219	12	305	34	15.3	3000	136	HP2248PDMB	HP2248PD
60	1524	12	305	42		3000	136	HP2260PDMB	HP2260PD

☑ Indicatesantimicrobial product.



# STARSYS®



Mobile WorkCenters



Tall Units



WorkCenters



Overheads





Carts

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).



# Literally, the lab of tomorrow.

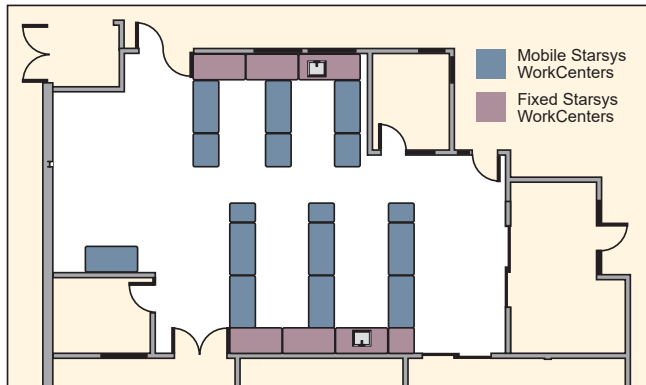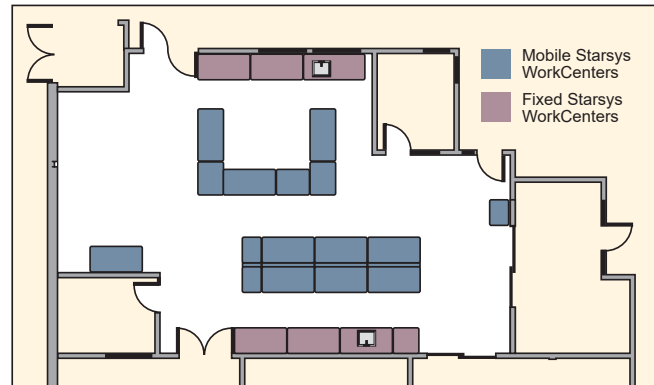**Research Lab . . .**

**Research Lab, 5 minutes Later . . .**


Starsys mobile products increase efficiency of your work space by adapting to the needed work environment and process workflow.

## The Starsys Modular System creates flexible space.

No matter what you need —open, closed, short, tall, mobile, stationary elements, preconfigured WorkCenters or carts... Starsys has the elements for you.

With Starsys, you choose from an array of modular units to fit the space and work specifications.

***It's that easy and that flexible.***

### Starsys Benefits:

- Flexibility to design a storage solution to meet your needs.
- Corrosion-proof polymer components for a contamination-free product.
- Microban® antimicrobial protection inhibits the growth of stain and odor-causing bacteria on Starsys, keeping the surface areas "cleaner between cleanings."
- Facilitates fast, efficient product installation.
- The ability to reconfigure individual units.
- The ability to easily reconfigure your furniture layout as needs change.
- Durable, easy-to-clean, polymer enclosures that won't chip, dent or rust ever.
- Rigid aluminum and epoxy-coated metal substructure combined with advanced polymers provide a robust stable work environment for even the most sensitive equipment.
- A high level of organization with easy access to supplies.
- Greater storage density in a smaller footprint.



### CLEANER BY DESIGN™

- Microban® antimicrobial protection helps to keep products "cleaner between cleanings."
- Advanced polymer and other proprietary finishes provide corrosion resistance.
- Smooth, rounded corners to allow for easier cleaning.

\*Microban protection is not designed to protect users against disease causing microorganisms.


Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.

# Customize, optimize, revolutionize your space.



Mobile  
Workcenters  
pg. 182-189

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).



pg. 204  
Stationary  
Workcenters



pg. 194  
Mobile Carts



Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



# Change the way you work.

Starsys mobile workcenter units can be specified with or without overhead cabinets attached. Available overhead heights include 24", 27", 30", and 36".

Standard countertop choices include laminate, stainless steel, phenolic and solid surface.

Starsys drawer options include choice of polymer drawers or heavy-duty drawers featuring stainless steel drawer interior. Heavy-duty drawers are available in both single- and double-wide modules.

Overhead cabinet shelves are removable, easy-to-clean, and are available in both solid polymer and epoxy-coated, open-wire shelf designs.

Overhead cabinet accessories include light fixture, cassette bins for small item storage and organization, and poly shelf dividers.

Overhead cabinets can be specified with a variety of available doors, clear or solid style, locking or non-locking.

Color-coded drawer pulls are available in an array of choices to fit any system or decor.

Starsys Doors, available in multiple heights, can be specified with or without window, as well as locking and non-locking.

5" (127mm) polyurethane casters with easily accessed toe brake make for easy rolling.

Additional caster options are available through Starsys configurator.com or by contacting your Metro representative.



## Starsys Mobile WorkCenters

Easily adapt to a changing work environment and even inspire change in your work environment.

**Available Widths:** Starsys Mobile WorkCenters are available in four widths: single: 24" (610mm), double: 44" (1118mm), triple: 63" (1600mm) & single-kneewell-single: 73" (1854mm).

**Kneewell Options:** Starsys Mobile WorkCenters configurations have several kneewell options including a keyboard tray, pencil drawer and support bracket. The triple unit has a right oriented kneewell option with a nominal opening of 42" (1067mm) and the single-kneewell-single configuration has a nominal opening of 30" (762mm).

**Total Unit Height:** All units with overhead storage have a total height of 82" (2083mm) (with 5" casters). Deduct 2" from unit height when specifying 3" Total-Lock casters or Leveling casters.

**Working heights with Overheads:** 33", 36", 39", 42" (45" height is not available with overhead storage)

**Working Heights:** Available working heights without overhead storage: 33", 36", 39", 42", 45" (with 5" casters). Deduct 2" (51mm) from unit height when specifying 3" Total-Lock casters or Leveling casters.

3" (76mm)  
Total-Lock  
Caster:

Utilize 3" total-lock plate casters for limited mobile applications or when additional storage area is required.



B3P-TL

5" (127mm) Swivel/Lock (Directional) Casters (available by request)  
Other specialty caster options are available, consult your Metro representative.

5" (127mm)  
Stainless Steel  
Caster:  
Recommended for corrosive environments.



B5PBGSA

5" (127mm)  
Total-Lock,  
All-Polymer  
Caster:  
Recommended for corrosive environments.  
All-polymer total-lock plate caster is an economical alternative to stainless casters.



B5PC-TL

Stabilizer/  
Leveling Caster:  
Recommended for applications where benchtop equipment demands unit stability and/or a level worksurface. Engage caster foot for stability, release for mobility.



B3N-AS

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

For specification details, consult page 221.

## Preconfigured Mobile WorkCenters with Epoxy Tops —{46.01}

All preconfigured units below come standard with taupe door/drawer pulls and polymer 5" (127mm) diameter casters (2-total lock, 2-swivel). Overhead units include 27" (686mm) cabinets with locking clear doors and two poly shelves. The countertops are 1" (25mm) thick black epoxy resin. Other top materials and accessories are available upon request.

Description	Cat. No.	Overall Dimensions Width/Length/Height	Cat. No. With Overhead	Overall Dimensions Width/Length/Height
<b>Single-Wide Units</b>				
Single-Wide with Standard Drawers	<b>SXRMWS36EBS2</b>	28.6x23.6x36.5	<b>SXRMWS36EOH2</b>	28.6x23.6x81.5
Single-Wide with Locking Doors and Poly Shelves	<b>SXRMWS36EBS3</b>	28.6x23.6x36.5	<b>SXRMWS36EOH3</b>	28.6x23.6x81.5
<b>Double-Wide Units</b>				
Double-Wide with Standard Drawers	<b>SXRMWD36EBS2</b>	28.6x43.4x36.5	<b>SXRMWD36EOH2</b>	28.6x43.4x81.5
Double-Wide with Locking Doors and Poly Shelves	<b>SXRMWD36EBS3</b>	28.6x43.4x36.5	<b>SXRMWD36EOH3</b>	28.6x43.4x81.5
<b>Triple-Wide Units</b>				
Triple-Wide with Locking Doors and Wire Shelves	<b>SXRMWT36EBS4</b>	28.6x63.2x36.5		
Triple-Wide with Locking Doors and Poly Shelves			<b>SXRMWT36EOH3</b>	28.6x63.2x81.5
Triple Kneewell with Standard Drawers	<b>SXRMWTK36EBS2</b>	28.6x63.2x36.5	<b>SXRMWTK36EOH2</b>	28.6x63.2x81.5
Triple Kneewell with Locking Doors and Poly Shelves	<b>SXRMWTK36EBS3</b>	28.6x63.2x36.5	<b>SXRMWTK36EOH3</b>	28.6x63.2x81.5
Triple Kneewell with Standard Drawers	<b>SXRMWTK39EBS2</b>	28.6x63.2x39.5		
Triple Kneewell with Locking Doors and Poly Shelves	<b>SXRMWTK39EBS3</b>	28.6x63.2x39.5		
Single Kneewell with Standard Drawers	<b>SXRMWSK39EBS2</b>	28.6x73x39.5		
Single Kneewell with Locking Doors and Poly Shelves	<b>SXRMWSK39EBS3</b>	28.6x73x39.5		

### Single-Wide Units



Cat. No.  
**SXRMWS36EBS2**



Cat. No.  
**SXRMWS36EBS3**

### Tripple-Wide Units



Cat. No.  
**SXRMWT36EBS4**

### Double-Wide Units



Cat. No.  
**SXRMWD36EBS2**



Cat. No.  
**SXRMWD36EBS3**

\*Trespa Phenolic, Laminate, Solid Surface and Stainless Steel tops are available. Contact your Metro representative.

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.

Mobile WorkCenters with Epoxy Tops and Overheads\*



Cat. No.  
**SXRMMWK36EBS2**



Cat. No.  
**SXRMMWK36EBS3**



Cat. No.  
**SXRMMWK39EBS2**



Cat. No.  
**SXRMMWK39EBS3**



Cat. No.  
**SXRMMWSK39EBS2**



Cat. No.  
**SXRMMWSK39EBS3**



Cat. No.  
**SXRMMWS36EOH2**



Cat. No.  
**SXRMMWS36EOH3**



Cat. No.  
**SXRMMWD36EOH2**

\*Trespa Phenolic, Laminate and StainlessSteel tops are available. Contact your Metro representative.

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).



Mobile WorkCenters with Epoxy Tops and Overheads\*



Cat. No.  
**SXRMD36EOH3**



Cat. No.  
**SXRMWT36EOH3**



Cat. No.  
**SXRMWTK36EOH2**




Cat. No.  
**SXRMWTK36EOH3**

\*Trespa Phenolic, Laminate, Solid Surface and Stainless Steel tops are available. Contact your Metro representative.



Removable drawer totes allow for exchange or convenient access outside of drawer (page 198).



Heavy-Duty Drawer\* (page 202).

**\*A keylock module is required in all heavy-duty drawers specified in mobile applications. See [www.metroconfigurator.com](http://www.metroconfigurator.com)**

## Starsys Drawers

Starsys offers two types of drawers to address varying user requirements. Below is a feature comparison to help determine the appropriate drawers system for a desired application.

Feature	Polymer Drawers	Heavy-Duty Drawers
Light to medium weight capacity (25-40 lbs.)	X	
Heavy weight capacity (up to 150 lbs.)		X
Removable tote	X	
Inner panel compatible	X	
Slotted post insert compatible		X
Ball bearing slide		X
Full extension	X	X
Stainless steel interior		X
Polymer interior	X	
Easy to clean	X	
Easily removed/reconfigured	X	
Adjustable dividers	X	X
Lockable	X	X
Optional lock cover	X	
Label kits	X	X
Accommodate hanging files		X

## Starsys Doors

Hinged and tambour. The hinged doors are available in a choice of solid or clear. Each offers unique benefits to address varying user requirements. Below is a feature comparison to help determine the appropriate door selection for a desired application.



Solid Doors



Clear Door

Feature	Hinged Solid Door	Hinged Clear Door	Benefit
Visual Security	X		Puts inventory out of plain site
Hides clutter	X		Enhances department aesthetics
Visual inventory		X	Protection is not compromised when looking for supplies
Lockable	X	X	Added security
Space saving			Does not encroach on work space
Door swing overlaps	X	X	Promotes door closure to protect supplies adjacent storage spaces
90 degree hinge	X	X	Prevents door from overlapping adjacent space
270 degree hinge	X	X	Allows door to swing to side of cabinet or cart
Polymer	X	X	Impact and corrosion protection
Left or right hinge	X	X	Provides appropriate swing direction
Center closing	X	X	Allows for double wide storage compartments
Door label holders	X	X	Provides clean replenishable labeling option
Non-locking	X	X	Lower cost alternative

## Starsys Cart Accessory Casters

Standard Starsys Mobile Unit Casters. All mobile units come standard with these casters.

Description	Cat. No.
(2) Front Polymer 5" (127mm) Casters with Toe Brake	<b>B5PTB</b>
(2) Rear Polymer 5" (127mm) Swivel Casters	<b>B5P</b>

## Caster Options

3" (76mm) Total-Lock Caster:  
Utilize 3" total-lock plate casters for limited mobile applications or when additional storage area is required.



B3P-TL

5" (127mm) Stainless Steel Caster:  
Recommended for corrosive environments.



B5PBGSA

5" (127mm) Total-Lock, All-Polymer Caster:  
Recommended for corrosive environments. All-polymer total-lock plate caster is an economical alternative to stainless steel casters.



B5PC-TL

Stabilizer/Leveling Caster:  
Recommended for applications where benchtop equipment demands unit stability and/or a level worksurface. Engage caster foot for stability, release for mobility.



B3N-AS

5" (127mm) Swivel/Lock (Directional) Casters (available by request)  
Other specialty caster options are available, consult your Metro representative.

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

## Mobile WorkCenter Countertop Options

### Epoxy Tops — Mobile WorkCenters

Description	Cat. No.
<b>Tops with Backsplash</b>	
Epoxy Top 21" (533mm) L. Backsplash — Black	<b>SXRCT2B23EB</b>
Epoxy Top 42" (1067mm) L. Backsplash — Black	<b>SXRCT2B43EB</b>
Epoxy Top 63" (1600mm) L. Backsplash — Black	<b>SXRCT2B63EB</b>
Epoxy Top 73" (1854mm) L. Backsplash — Black	<b>SXRCT2B73EB</b>
<b>Island Tops —No Backsplash</b>	
Epoxy Top 21" (533mm) L. No Backsplash — Black	<b>SXRCT2N23EB</b>
Epoxy Top 42" (1067mm) L. No Backsplash — Black	<b>SXRCT2N43EB</b>
Epoxy Top 63" (1600mm) L. No Backsplash — Black	<b>SXRCT2N63EB</b>
Epoxy Top 73" (1854mm) L. No Backsplash — Black	<b>SXRCT2N73EB</b>
<b>Tops with Backsplashand Overheads</b>	
Epoxy Top 21" (533mm) L. Backsplash Overhead — Black	<b>SXRCT2U23EB</b>
Epoxy Top 42" (1067mm) L. Backsplash Overhead — Black	<b>SXRCT2U43EB</b>
Epoxy Top 63" (1600mm) L. Backsplash Overhead — Black	<b>SXRCT2U63EB</b>
Epoxy Top 73" (1854mm) L. Backsplash Overhead — Black	<b>SXRCT2U73EB</b>
<b>Epoxy Top Brackets —Not Required for Island Tops</b>	
Single Epoxy Countertop Back Bracket	<b>SXRSEB</b>
Double Epoxy Countertop Back Bracket	<b>SXRDEB</b>
Triple Epoxy Countertop Back Bracket	<b>SXRTEB</b>
<b>Side Splash Options</b>	
Epoxy Side Splash — Black	<b>SXRCN2EB</b>
Epoxy Side Splash Overhead — Black	<b>SXRCS2EB</b>



### Stainless Steel Tops — Mobile WorkCenters

Description	Cat. No.
<b>Tops with Backsplash</b>	
Stainless Steel Mobile WorkCenter Countertop — Single Backsplash	<b>SXRCT2B23S</b>
Stainless Steel Mobile WorkCenter Countertop — Double Backsplash	<b>SXRCT2B43S</b>
Stainless Steel Mobile WorkCenter Countertop — Triple Backsplash	<b>SXRCT2B63S</b>
Stainless Steel Mobile WorkCenter Countertop — S-KW-S Backsplash	<b>SXRCT2B73S</b>
<b>Island Tops —No Backsplash</b>	
Stainless Steel Mobile WorkCenter Countertop — Single Island	<b>SXRCT2N23S</b>
Stainless Steel Mobile WorkCenter Countertop — Double Island	<b>SXRCT2N43S</b>
Stainless Steel Mobile WorkCenter Countertop — Triple Island	<b>SXRCT2N63S</b>
Stainless Steel Mobile WorkCenter Countertop — S-KW-S Island	<b>SXRCT2N73S</b>
<b>Tops with Backsplashand Overheads</b>	
Stainless Steel Mobile WorkCenter Countertop — Single Overhead	<b>SXRCT2U23S</b>
Stainless Steel Mobile WorkCenter Countertop — Double Overhead	<b>SXRCT2U43S</b>
Stainless Steel Mobile WorkCenter Countertop — Triple Overhead	<b>SXRCT2U63S</b>
Stainless Steel Mobile WorkCenter Countertop — S-KW-S Overhead	<b>SXRCT2U73S</b>



See pages 209-210 for Overhead Cabinet Selection

\*Base unit working height is equal to Base interior height +9" [229mm]  
(based on 5" [127mm] casters)  
Overhead exterior height is equal to Overhead interior height +2.5" [64mm]

Starsys Mobile Workcenters are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



## Mobile WorkCenter Countertop Options (continued)

### Trespa® Phenolic Tops — Mobile WorkCenters



Mobile WorkCenter  
with Trespa®  
Phenolic Top

Description	Cat. No.
<b>Tops with Backsplash—No Overheads</b>	
Trespa Phenolic Mobile WorkCenter Countertop — Single Backsplash	SXRCT2B23T
Trespa Phenolic Mobile WorkCenter Countertop — Double Backsplash	SXRCT2B43T
Trespa Phenolic Mobile WorkCenter Countertop — Triple Backsplash	SXRCT2B63T
Trespa Phenolic Mobile WorkCenter Countertop — S-KW-S Backsplash	SXRCT2B73T
<b>Island Tops —No Backsplash</b>	
Trespa Phenolic Mobile WorkCenter Countertop — Single Island	SXRCT2N23T
Trespa Phenolic Mobile WorkCenter Countertop — Double Island	SXRCT2N43T
Trespa Phenolic Mobile WorkCenter Countertop — Triple Island	SXRCT2N63T
Trespa Phenolic Mobile WorkCenter Countertop — S-KW-S Island	SXRCT2N73T
<b>Tops with Backsplashand Overheads</b>	
Trespa Phenolic Mobile WorkCenter Countertop — Single Overhead	SXRCT2O23T
Trespa Phenolic Mobile WorkCenter Countertop — Double Overhead	SXRCT2O43T
Trespa Phenolic Mobile WorkCenter Countertop — Triple Overhead	SXRCT2O63T
Trespa Phenolic Mobile WorkCenter Countertop — S-KW-S Overhead	SXRCT2O73T
<b>Side Splash Options</b>	
Trespa Phenolic Mobile WorkCenter Countertop — Side Splash Backsplash	SXRCN2T
Trespa Phenolic Mobile WorkCenter Countertop — Side Splash Overhead	SXRCCS2T

### Corian® Tops — Mobile WorkCenters

\*Baseunit working height is equal to Baseinterior height +9"[229mm] (basedon 5" [127mm] casters)Overhead exterior height is equal to Overheadinterior height +2.5"[64mm]

Description	Size	Cat. No. Tarragon	Cat. No. Flint	Cat. No. Matterhorn	Cat. No. Silt
<b>Tops with Backsplash—No Overheads</b>					
Single	28.568x23.575	SXRCT3B23CTA	SXRCT3B23CFL	SXRCT3B23CMA	SXRCT3B23CSL
Double	28.568x43.375	SXRCT3B43CTA	SXRCT3B43CFL	SXRCT3B43CMA	SXRCT3B43CSL
Triple	28.568x63.175	SXRCT3B63CTA	SXRCT3B63CFL	SXRCT3B63CMA	SXRCT3B63CSL
Single-Kneewell-Single	28.568x73.075	SXRCT3B73CTA	SXRCT3B73CFL	SXRCT3B73CMA	SXRCT3B73CSL
<b>Island Tops —No Backsplash</b>					
Single	28.568x23.575	SXRCT3N23CTA	SXRCT3N23CFL	SXRCT3N23CMA	SXRCT3N23CSL
Double	28.568x43.375	SXRCT3N43CTA	SXRCT3N43CFL	SXRCT3N43CMA	SXRCT3N43CSL
Triple	28.568x63.175	SXRCT3N63CTA	SXRCT3N63CFL	SXRCT3N63CMA	SXRCT3N63CSL
Single-Kneewell-Single	28.568x73.075	SXRCT3N73CTA	SXRCT3N73CFL	SXRCT3N73CMA	SXRCT3N73CSL
<b>Tops with Backsplashand Overheads</b>					
Single	28.568x23.575	SXRCT3U23CTA	SXRCT3U23CFL	SXRCT3U23CMA	SXRCT3U23CSL
Double	28.568x43.375	SXRCT3U43CTA	SXRCT3U43CFL	SXRCT3U43CMA	SXRCT3U43CSL
Triple	28.568x63.175	SXRCT3U63CTA	SXRCT3U63CFL	SXRCT3U63CMA	SXRCT3U63CSL
Single-Kneewell-Single	28.568x73.075	SXRCT3U73CTA	SXRCT3U73CFL	SXRCT3U73CMA	SXRCT3U73CSL
<b>Side Splash Options</b>					
With Overhead Storage	3x25.063	SXRS3CTA	SXRS3CFL	SXRS3CMA	SXRS3CSL
Without Overhead Storage	3x20.688	SXRN3CTA	SXRN3CFL	SXRN3CMA	SXRN3CSL

### Kneewell Options

Description	Cat. No.
<b>30" (762mm) Kneewell</b>	
30" (762mm) Brkt Assembly Keyboard Tray	SXR30BRKTKB-MW
30" (762mm) Brkt Assembly Blank	SXR30BRKT-MW
30" (762mm) Brkt Assembly Pencil Drawer	SXR30BRKTPN-MW
<b>42" (1067mm) Kneewell</b>	
42" (1067mm) Brkt Assembly Keyboard Tray, Mobile WorkCenter	SXR42BRKTKB-MW
42" (1067mm) Brkt Assembly Blank, Mobile WorkCenter	SXR42BRKT-MW
42" (1067mm) Brkt Assembly Pencil Drawer, Mobile WorkCenter	SXR42BRKTPN-MW

Solid  
Surface  
Colors



Platinum



Matterhorn



Silt



Flint

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

## Mobile WorkCenter Overhead Cabinet Support

Select overhead cabinets on pages 209 and 210.

Description	Cat. No.
<b>Lateral Supports for Overhead Cabinets —Select one per WorkCenter</b>	
Overhead Structure Single Wide Mobile WorkCenter	SXRSMWOHB
Overhead Structure Double Wide Mobile WorkCenter	SXRDMWOHB
Overhead Structure Triple Wide Mobile WorkCenter	SXRTMWOHB
Overhead Structure Single-Kneewell Mobile WorkCenter	SXRKMWOHB
<b>Vertical Supports for Overhead Cabinets —Select one pair per WorkCenter</b>	
24" (610mm) Base Interior with 24" (610mm) Overhead Interior (1 Pair)	SXRMWUP24-24
24" (610mm) Base Interior with 27" (686mm) Overhead Interior (1 Pair)	SXRMWUP24-27
24" (610mm) Base Interior with 30" (762mm) Overhead Interior (1 Pair)	SXRMWUP24-30
24" (610mm) Base Interior with 33" (838mm) Overhead Interior (1 Pair)	SXRMWUP24-33
27" (686mm) Base Interior with 24" (610mm) Overhead Interior (1 Pair)	SXRMWUP27-24
27" (686mm) Base Interior with 27" (686mm) Overhead Interior (1 Pair)	SXRMWUP27-27
27" (686mm) Base Interior with 30" (762mm) Overhead Interior (1 Pair)	SXRMWUP27-30
30" (762mm) Base Interior with 24" (610mm) Overhead Interior (1 Pair)	SXRMWUP30-24
30" (762mm) Base Interior with 27" (686mm) Overhead Interior (1 Pair)	SXRMWUP30-27
33" (838mm) Base Interior with 24" (610mm) Overhead Interior (1 Pair)	SXRMWUP33-24
<b>Overhead Cabinet and Shelving Combination —Vertical Supports</b>	
24" (610mm) Base 24" (610mm) Overhead Interior and Slotted Inserts	SXRMWUP24Q-24
24" (610mm) Base 27" (686mm) Overhead Interior and Slotted Inserts	SXRMWUP24Q-27
24" (610mm) Base 30" (762mm) Overhead Interior and Slotted Inserts	SXRMWUP24Q-30
24" (610mm) Base 33" (838mm) Overhead Interior and Slotted Inserts	SXRMWUP24Q-33
27" (686mm) Base 24" (610mm) Overhead Interior and Slotted Inserts	SXRMWUP27Q-24
27" (686mm) Base 27" (686mm) Overhead Interior and Slotted Inserts	SXRMWUP27Q-27
27" (686mm) Base 30" (762mm) Overhead Interior and Slotted Inserts	SXRMWUP27Q-30
30" (762mm) Base 24" (610mm) Overhead Interior and Slotted Inserts	SXRMWUP30Q-24
30" (762mm) Base 27" (686mm) Overhead Interior and Slotted Inserts	SXRMWUP30Q-27
33" (838mm) Base 24" (610mm) Overhead Interior and Slotted Inserts	SXRMWUP33Q-24

## Mobile WorkCenter Reagent Shelving and Supports

Description	Cat. No.
<b>Reagent Shelving Options</b>	
Shelf Assembly — Single width	SXRSMWSHF
Shelf Assembly — Double width	SXRDMWSHF
Shelf Assembly — Triple width	SXRTMWSHF
Shelf Assembly — Single-Kneewell — Single	SXRKMWSHF
<b>Lateral Support for Reagent Shelving —Select one per WorkCenter</b>	
Cross Member — Single width	SXRSMWSB
Cross Member — Double width	SXRDMWSB
Cross Member —Triple width	SXRTMWSB
Cross Member — Single-Kneewell —Single	SXRKMWSB
<b>Vertical Supports with Slotted Inserts for Reagent Shelving — Select one pair per WorkCenter</b>	
24" (610mm) Base Interior with Slotted Inserts (1 Pair)	SXRMWUP24Q
27" (686mm) Base Interior with Slotted Inserts (1 Pair)	SXRMWUP27Q
30" (762mm) Base Interior with Slotted Inserts (1 Pair)	SXRMWUP30Q
33" (838mm) Base Interior with Slotted Inserts (1 Pair)	SXRMWUP33Q



\*Base unit working height is equal to Base interior height +9" [229mm] (based on 5" [127mm] casters) Overhead exterior height is equal to Overhead interior height +2.5" [64mm]

Starsys Mobile Workcenters are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.

# Supplies in demand.



## Tall Mobile Units

Mobile units are available in single ( $22\frac{3}{4}$ " [578mm]), double ( $42\frac{1}{2}$ " [1080mm]) and triple ( $62\frac{1}{2}$ " [1558mm]) widths. The overall height of a tall mobile unit is  $78\frac{1}{3}$ " (1990mm). Add  $11\frac{3}{4}$ " (299mm) with sloped tops. All units are  $24\frac{7}{8}$ " (632mm) deep.

## General Overview:

The configurable interior space is 66" (1676mm) on a tall unit. Short units interior space from 24" (610mm) to 48" (1219mm) in 3" (76mm) increments.

Triple-width units must be divided into a single & double bay or three single bays—there are no triple wide accessories.

The specification of a qwikSLOT interior or an empty interior will necessitate an extended mobile base as part of the configuration.

Starsys Mobile Units have a total recommended load rating of 900 lbs. (408kg) including the weight of the Starsys unit.

Units feature two 5" (127mm) casters—the front two casters have color-matched toe-brakes.

Microban® antimicrobial protection inhibits the growth of stain and odor-causing bacteria on Starsys, keeping the surface areas "cleaner between cleanings."

## Tall Stationary Units

Tall Stationary Units are stand-alone products or may be used in conjunction with other tall units or Starsys product families. Tall stationary units are available in single and double widths only.

## General Overview:

The overall height of a tall stationary unit is  $72\frac{1}{2}$ " (1842mm). Add  $11\frac{3}{4}$ " (299mm) with sloped tops. Overall widths are  $21\frac{1}{2}$ " (546mm) for singles and  $41\frac{1}{3}$ " (1049mm) for doubles.

The configurable interior space is 66" (1676mm).

Filler kits are available to fill gaps between units, between the back of a unit and the wall (25" [635mm] & 30" [762mm] depths) and between tall units interfacing at 45 or 90 degrees.

All tall units must be affixed to the wall with appropriate mounting hardware utilizing the attached Starsys mounting bracket or affixed to the floor with the optional floor mounting kit.

Tall units are not intended to support cantilevered countertop sections.

Drawer/Door Pulls (one required per drawer or door) To specify color for pull, order following catalog numbers for each drawer or door:



Dark Taupe SXRDP-TP White SXRDP-WH Cobalt SXRDP-CB Red SXRDP-RE Orange SXRDP-OR Green SXRDP-GR Yellow SXRDP-YL Slate Blue SXRDP-BL Violet SXRDP-VL Pink SXRDP-PK Black SXRDP-BK

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).





Cat. No. **SXRSGS1**



Cat. No. **SXRSGS2**



Cat. No. **SXR576CM5**



Cat. No. **SXR576CMHD2**



Cat. No. **SXR76CM3**



Cat. No. **SXR76CMHD1**



Cat. No. **SXRTGS2**



Cat. No. **SXRTGS3**



Cat. No. **SXR572TU2**



Cat. No. **SXR572TU4**



Cat. No. **SXR572TUHD2**

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



Cat. No. **SXRD72TU2**



Cat. No. **SXRD72TU3**



Cat. No. **SXRD72TU6**

Accessories

Description	Cat. No.
Extended Handle Assembly 4" ([102mm] H.x21½" [546mm] W.x 4¼" [108mm] L.)	<b>SXREHAN†</b>
Extended Handle Assembly — For Installation In Field	<b>SXREHAN-KD</b>
Coat Hanger Tube	<b>SXRSHANG</b>


†Unless otherwise requested, handle will be assembled on left side of unit.



Extended Handle

Filler Kits and Trim Kits — Tall Stationary Units

Description	Cat. No.
Unit to Unit Filler Strip Kit	<b>SXR72UUFLR</b>
Back Wall Trim Kit x 72" (1829mm)	<b>SXR72BKFLR</b>
Back Wall Trim Kit x 72" (1829mm) — 30" (762mm) Deep	<b>SXR72BKFLR30</b>
45° Corner Filler Strip Kit x 84" (2134mm)	<b>SXR84CR45FLR</b>
90° Corner Filler Strip Kit x 84" (2134mm)	<b>SXR84CR90FLR</b>



Coat Hanger Tube

Floor Mounting Kit


Description	Cat. No.
Floor Mounting Kit	<b>SX-FLR</b>



To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

## Get a little extra out of your supply management process with Starsys®XD.

Extra Deep (XD) design creates added capacity for increased storage space. The added space accommodates longer items and presents a novel lean two-bin approach for protected supply management. Shelves can be repositioned easily and can be set from horizontal up to a  $\pm 20$  degree angle for (-) supply containment or (+) optimum visibility and accessibility, especially for the upper shelves.



XD design with low-profile shelf allows for maximum space efficiency.

XD design with shelves installed at an angle also accommodates the deeper bins available from automated supply cabinets.



DOUBLE  
SXR76MXD2  
(Shown with bins.)



### Preconfigured Units

Description	Cat. No.
Single Wide, Clear Doors, Non-Locking	SXRS76MXD1
Single Wide, Clear Doors, Key Locking	SXRS76MXD2
Single Wide, Clear Doors, Code Locking	SXRS76MXD3
Single Wide, Solid Doors, Non-locking	SXRS76MXD4
Single Wide, Solid Doors, Key Locking	SXRS76MXD5
Single Wide, Solid Doors, Code Locking	SXRS76MXD6
Double Wide, Clear Doors, Non-Locking	SXRD76MXD1
Double Wide, Clear Doors, Key Locking	SXRD76MXD2
Double Wide, Clear Doors, Code Locking	SXRD76MXD3
Double Wide, Solid Doors, Non-locking	SXRD76MXD4
Double Wide, Solid Doors, Key Locking	SXRD76MXD5
Double Wide, Solid Doors, Code Locking	SXRD76MXD6
Triple Wide, Clear Doors, Non-Locking	SXRT76MXD1
Triple Wide, Clear Doors, Key Locking	SXRT76MXD2
Triple Wide, Clear Doors, Code Locking	SXRT76MXD3
Triple Wide, Solid Doors, Non-locking	SXRT76MXD4
Triple Wide, Solid Doors, Key Locking	SXRT76MXD5
Triple Wide, Solid Doors, Code Locking	SXRT76MXD6



TRIPLE  
SXRT76MXD1  
(Shown with bins.)



SINGLE  
SXRS76MXD1  
(Shown with bins.)



See page 72 for available bins.



Key Lock



Code Lock

### Low-Profile Shelf

Shelf	Cat. No.	Dimensions W x D x H (in.)	(mm)	Max. Weight Capacity (lbs.)	(kg)
Single Width	SXRSXDQS	20 x 22.2 x 0.7	1701 x 518 x 640	100	45.4
Double Width	SXRXDQS	40 x 22.3 x 0.7	1702 x 1021 x 640	200	90.7
*Triple Width	*Uses (1) Single & (1) Double Width Shelf				



SXRXDQS

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



# Process Perfect.

Easy to clean advanced polymer material is a marked improvement over traditional metal carts: won't dent, chip, rust, flake or corrode.

Interchangeable 3", 6" and 9" (76, 152 and 230mm) drawers with removable totes can be fully extended for easy access.

Color-coded drawer pulls are available in an array of choices to fit any system or decor.

Label holders available to quickly identify drawer contents.

Each drawer face has a 1/2" x 18 3/8" (12.7 x 466.1mm) polished area allowing for secure adhesion of labels (not supplied by Metro).



The convenient overbridge can be fitted with a wide selection of baskets, shelves, and bins to keep necessary items within reach.

Swing-out Side Storage units increase work surface up to 135%.



Side storage allows easy customization of a wide variety of accessories from trash can and Sharps container to storage bins and shelves.

5" (127mm) polyurethane casters with easily accessed toe brake make for easy rolling.



## Starsys Carts

Starsys provides a complete system of enclosed carts in a wide variety of heights and system widths. When mobility is a key part of your storage needs, Starsys carts provide a broad selection of unique solutions. This modular system approach allows you to create a cart to meet your exact needs.

### Starsys cart widths and depth:

The Starsys cart system is built upon a square module. Multiplying this storage module results in system widths of single 22 3/4" (578mm), double 42 1/2" (1080mm) and triple 62 1/2" (1588mm) widths. The depth on all carts is 24.9" (632mm).

### Starsys cart heights:

Starsys carts are available in the following working heights: 36" (907mm), 39" (983mm), 42" (1060mm), 45" (1136mm) and 48" (1212mm).

## General Overview:

Starsys carts feature 5" (127mm) swivel casters. The front two casters have a Total-Lock Toe Brake (locks both the wheel and the horn).

Starsys carts feature a smooth polymer top/worksurface. If chemical resistance is a concern or heavy equipment is likely to be placed on the top of the cart, Starsys Mobile WorkCenters may be a more appropriate product selection.

An extended mobile base is required when Heavy-Duty drawers, Active Level shelving or quickSLOT shelving is specified in a Starsys configuration. The extended mobile base adds an additional 3" (76mm) to the overall depth of the cart. The extended base combines additional counter weights with a deeper footprint to reduce any chance of overbalance when active level shelving is fully extended.

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).



Close-up  
of system



Emergency Response  
Cat. No. **SXRS40CM1**



General Supply  
Cat. No. **SXRSISO**



Gowning Storage  
Cat. No. **SXRSMDSRG**



Fume Hood Storage  
Cat. No. **SXRSDRS**



Personal Protective Equipment  
Cat. No. **SXRS43CM1**



Validation  
Cat. No. **SXRS43CM3**



LARIaging  
Cat. No. **SXRSTRAMA**



Computer ReadyCart  
Cat. No. **SXRCOMPBED**

Drawer Pulls (one required per drawer) To specify color for drawer pull, order following catalog numbers for each drawer:



Dark Taupe **SXRDP-TP** White **SXRDP-WH** Code Blue **SXRDP-CB** Red **SXRDP-RE** Orange **SXRDP-OR** Green **SXRDP-GR**



Yellow **SXRDP-YL** Slate Blue **SXRDP-BL** Purple **SXRDP-VL** Pink **SXRDP-PK** Black **SXRDP-BK**



Cold Room/Buffer Cart  
Cat. No. **SXRD43CM3**



LARSecure Transport  
Cat. No. **SXRD43CM4**

## Basic Single Wide, Locking Carts

(in.)	(mm)	Drawer Configuration	Cat. No.
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x41 <sup>3</sup> / <sub>4</sub>	1061x578x1061	1-3", 3-6", 1-9", 0-12"	<b>SXRS1310L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x41 <sup>3</sup> / <sub>4</sub>	1061x578x1061	3-3", 2-6", 1-9", 0-12"	<b>SXRS3210L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x41 <sup>3</sup> / <sub>4</sub>	1061x578x1061	5-3", 1-6", 1-9", 0-12"	<b>SXRS5110L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x44 <sup>3</sup> / <sub>4</sub>	1137x578x1137	1-3", 2-6", 2-9", 0-12"	<b>SXRS1220L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x44 <sup>3</sup> / <sub>4</sub>	1137x578x1137	4-3", 2-6", 1-9", 0-12"	<b>SXRS4210L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x44 <sup>3</sup> / <sub>4</sub>	1137x578x1137	6-3", 1-6", 1-9", 0-12"	<b>SXRS6110L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x47 <sup>3</sup> / <sub>4</sub>	1213x578x1213	0-3", 3-6", 2-9", 0-12"	<b>SXRS0320L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x47 <sup>3</sup> / <sub>4</sub>	1213x578x1213	2-3", 2-6", 2-9", 0-12"	<b>SXRS2220L</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x47 <sup>3</sup> / <sub>4</sub>	1213x578x1213	3-3", 3-6", 1-9", 0-12"	<b>SXRS3310L</b>

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.

## Build-a-Cart

### Cart Bodies without Drawers

Width/Length/Height (in.)	Width/Length/Height (mm)	Drawer Space (in.)	Drawer Space (mm)	Lock	Battery	Keyboard Mount	Width	Cat. No.
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x37 <sup>3</sup> / <sub>4</sub>	630x577x958	24	610	Key Lock	Li-Nano	Keyboard Tray	Single	<b>SXRS27K-KL</b>
24 <sup>7</sup> / <sub>8</sub> x22 <sup>3</sup> / <sub>4</sub> x42 <sup>3</sup> / <sub>4</sub>	630x819x1085	27	686	Key Lock	Li-Nano	Keyboard Tray	Single	<b>SXRS30K-KL</b>
24 <sup>7</sup> / <sub>8</sub> x42 <sup>1</sup> / <sub>2</sub> x42 <sup>3</sup> / <sub>4</sub>	630x1080x1085	27	686	Key Lock	Li-Nano	Keyboard Tray	Double	<b>SXRD30K-KL</b>

\*Powered carts support all-in-one computers.

\*\*Powered cart shells come with a keyboard tray. Note: Keyboard inside tray dimensions: 13<sup>5</sup>/<sub>8</sub>" (346mm) W x 16<sup>3</sup>/<sub>8</sub>" (417mm) L.

### Drawers

Description	Cat. No.
3" (76mm) Drawer (No Drawer Pull)	<b>SXRS3*</b>
6" (152mm) Drawer (No Drawer Pull)	<b>SXRS6*</b>
9" (229mm) Drawer (No Drawer Pull)	<b>SXRS9*</b>
12" (305mm) Drawer (No Drawer Pull)	<b>SXRS12*</b>

\*Starsys standard drawer pull colors available.

\*\*For cassette options please refer to the Starsys cassette catalog page.

### Power Cord

Description	Cat. No.
Starsys/Flexline 12' (3.7m) Power Cord — US	<b>SXFL-CORD-B</b>
Starsys/Flexline 8' (2.4m) Power Cord — Euro	<b>SXFL-CORD-C</b>
Starsys/Flexline 8' (2.4m) Power Cord — UK	<b>SXFL-CORD-G</b>
Starsys/Flexline 8' (2.4m) Power Cord — Swiss	<b>SXFL-CORD-J</b>
Starsys/Flexline 8' (2.4m) Power Cord — Aus	<b>SXFL-CORD-I</b>

### Computer Accessories

Description	Cat. No.
Mouse, Optical, USB	<b>COMP-MSE</b>
Keyboard, IRocks Ultra X-Slim	<b>COMP-KB15</b>
Cover, Keyboard, IROCKS Antimicrobial	<b>COMP-KB15CVR</b>
Hub, 4 Port, Belkin — Black	<b>SXFLUSBHUB</b>
Corrugated Wire Cord Management 42" (1067mm)	<b>SXRLOOM</b>

### Computer Mounting Options

Description	Cat. No.
Single Wide Overbridge Computer/Monitor Mounting (Overbridge, Rail, Bracket & Cord Holder)	<b>SXRS505</b>
Double Wide Overbridge Computer/Monitor Mounting (Overbridge, Rail, Bracket & Cord Holder)	<b>SXRD505</b>
Articulating Monitor Arm (2-13 lbs.) (.9-6kg)	<b>SXR310</b>
Articulating Security Locking Laptop Arm (1-18 lbs.) (.5-8.2kg)	<b>SXR310SEC</b>
Articulating Monitor Arm (7.5-25 lbs.) (3.4-11.3kg)	<b>SXR318</b>
Articulating Monitor Arm (2-13 lbs.) (.9-6kg)	<b>SXR318-LD</b>



SXFLKBRDA



SXRS505  
(Shown with monitor)



SXR310  
Articulating  
Laptop Arm



SXR318-LD  
Articulating  
Monitor Arm



SXR310SEC  
Articulating Security  
Locking Laptop Arm

**Starsys® Carts with Power and Technology provides clinicians with real time access to information with the added benefits of:**

- Smaller footprint for tighter spaces and easier maneuvering
- Highly configurable drawers and medication bins
- Built in Microban® antimicrobial product protection



To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).



# The power is yours.


 Cat. No. **SXRSBED-KL**

 Cat. No. **SXRSSED-KL**

## Accessories

Cat. No.	Description		
<b>SXRPODSLK1</b>	Left Swingout Side Pod with Top-Locking Tilt Bins		X
<b>SXRPODSLK3</b>	Left Swingout Side Pod with 3 Top-Locking Tilt Bins	X	
<b>FL236</b>	Single Glove Box Holder 20 GA.		X

## Computer Accessories

Cat. No.	Description		
<b>SXRCNVTR-19</b>	Power Converter (19V Output)	X	X
<b>SXFL-TIP-01</b>	Power Tip Kit, 5.5mm x 2.5mm x 5.5mm x 2.1mm x 42" Long	X	X
<b>SXFL-CORD-B</b>	US Power Cord	X	X
<b>COMP-KB15</b>	Keyboard, i-Rocks Ultra X-Slim	X	X
<b>COMP-KB15CVR</b>	Cover, Keyboard, i-Rocks, Antimicrobial	X	X
<b>COMP-MSE</b>	Mouse, Optical, USB	X	X

## Carts

Cat. No.	Description		
<b>SXRS27K-KL</b>	Starsys 40" (mm) Single Wide Cart, Key Lock, Keyboard Tray and Li-Nano Power		
<b>SXRS30K-KL</b>	Starsys 43" (mm) Single Wide Cart, Key Lock, Keyboard Tray and Li-Nano Power	X	X
<b>SXR-</b>	Drawer Pull Color	SXRDP-BL	SXRDP-BL

## Drawers

Cat. No.	Description		
<b>SXRS3</b>	3" FL Drawer - No Drawer Pull	2	2
<b>SXRS6</b>	6" FL Drawer - No Drawer Pull	2	2
<b>SXRS9</b>	9" FL Drawer - No Drawer Pull	1	1

Power offering is transitioning in 2019. Call to verify current offering and part numbers.

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



Removable drawer totes allow for exchange or convenient access outside of cart

## Polymer Drawers and Accessories

Description	Inside Dimensions (Height/Width/Length) in. (mm)	Non-Locking Cat. No.	Locking Cat. No.
<b>Polymer Drawers (Drawer pull required — see selection below)</b>			
3" (76mm) SW Drawer	2 <sup>3</sup> / <sub>8</sub> x 16 <sup>3</sup> / <sub>8</sub> x 15 <sup>7</sup> / <sub>8</sub> (60x416x403)	<b>SXRS3</b>	<b>SXRS3-LK</b>
4.5" (114mm) SW Drawer	3 <sup>7</sup> / <sub>8</sub> x 16 <sup>3</sup> / <sub>8</sub> x 15 <sup>7</sup> / <sub>8</sub> (98x416x403)	<b>SXRS4.5</b>	
6" (152mm) SW Drawer	5 <sup>5</sup> / <sub>8</sub> x 16 <sup>1</sup> / <sub>4</sub> x 15 <sup>3</sup> / <sub>4</sub> (136x412.7x400)	<b>SXRS6</b>	<b>SXRS6-LK</b>
7.5" (191mm) SW Drawer	6 <sup>7</sup> / <sub>8</sub> x 16 <sup>1</sup> / <sub>4</sub> x 15 <sup>3</sup> / <sub>4</sub> (174x412.7x400)	<b>SXRS7.5</b>	
9" (230mm) SW Drawer	8 <sup>3</sup> / <sub>8</sub> x 16 <sup>1</sup> / <sub>4</sub> x 15 <sup>3</sup> / <sub>4</sub> (225x412.7x400)	<b>SXRS9</b>	<b>SXRS9-LK</b>
10.5" (267mm) SW Drawer	9 <sup>7</sup> / <sub>8</sub> x 16 <sup>1</sup> / <sub>4</sub> x 15 <sup>3</sup> / <sub>4</sub> (250x412.7x400)	<b>SXRS10.5</b>	
12" (305mm) SW Drawer	11 <sup>3</sup> / <sub>8</sub> x 16 <sup>1</sup> / <sub>4</sub> x 15 <sup>3</sup> / <sub>4</sub> (298x412.7x400)	<b>SXRS12</b>	

**Drawer Pulls** (one required per drawer) To specify color for drawer pull, order following catalog numbers for each drawer:

Dark Taupe <b>SXRD-TP</b>	White <b>SXRD-WH</b>	Cobalt <b>SXRD-CB</b>	Red <b>SXRD-RE</b>	Orange <b>SXRD-OR</b>	Green <b>SXRD-GR</b>	Yellow <b>SXRD-YL</b>	Slate Blue <b>SXRD-BL</b>	Violet <b>SXRD-VL</b>	Pink <b>SXRD-PK</b>	Black <b>SXRD-BK</b>



SXRLABKIT

Description	Dimensions Height/Length in.	Cat. No.
<b>Drawer Label Holders</b>		
Label Kits (10 Pieces Per Kit)	3/4" X 11" (19 x 279mm)	<b>SXRLABKIT</b>

**Note:** Each drawer face has a 1/2 x 18 3/8" polished area allowing for secure adhesion of DYMO and Zebra labels (not supplied by Metro).



DYMO and Zebra Labels  
(not supplied by Metro)




SXR3DIV Drawer Divider Kit



SXR6DIV Drawer Divider Kit



SXR3DVEggcrate  
Drawer Divider Kit

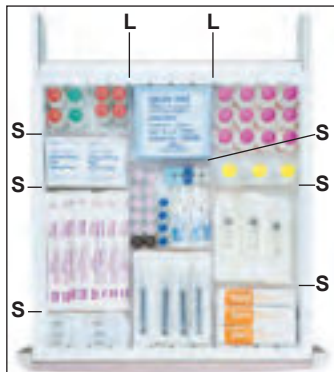

Drawer dividers are available to organize your supplies for easy access.

## Drawer Accessories for Drawers and Full Extension Totes

Description	Product Detail (Qty.) in. (mm)	Cat. No.
<b>Drawer Divider Kits</b>		
3" (76mm) Drawer Divider Kit	(2) 16.8" (426.7mm) & (6) 5" (127mm)	<b>SXR3DIV</b>
3" (76mm) Drawer Short Dividers	(3) 5" (127mm)	<b>SXR3SDIV</b>
3" (76mm) Drawer Long Dividers	(2) 16.8" (426.7mm)	<b>SXR3LDIV</b>
Egg Crate Style 3" (76mm) Drawer Divider Kit	(5) 16.8" (426.7mm) & (10) 8" (203.2mm)	<b>SXR3DVR</b>
6" (76mm) Drawer Divider Kit	(2) 16.8" (426.7mm) & (6) 5" (127mm)	<b>SXR6DIV</b>
6" (76mm) Drawer Short Dividers	(3) 5" (127mm)	<b>SXR6SDIV</b>
6" (76mm) Drawer Long Dividers	(2) 16.8" (426.7mm)	<b>SXR6LDIV</b>
Egg Crate Style 6"/9" (152/230mm) Drawer Divider Kit	(5) 16.8" (426.7mm) & (10) 8" (203.2mm)	<b>SXR6DVR</b>

**Note:** S = Short Divider; L = Long Divider.



Drawer Totes

Description	Inside Dimensions (Height/Width/Length) (in.) (mm)	Non-Locking Cat. No.	Locking Cat. No.
<b>Additional Starsys Totes — Totes provide complete containment for smaller items.</b>			
3" (76mm) Drawer Tote	2 <sup>3</sup> / <sub>8</sub> x 18 <sup>1</sup> / <sub>4</sub> x 17 <sup>1</sup> / <sub>2</sub> 70x464x445	<b>SXR3TOTE</b>	<b>SXR3-LKTOTE</b>
6" (152mm) Drawer Tote	5 <sup>3</sup> / <sub>4</sub> x 18 <sup>1</sup> / <sub>4</sub> x 17 <sup>1</sup> / <sub>2</sub> 146x464x445	<b>SXR6TOTE</b>	<b>SXR6-LKTOTE</b>
9" (229mm) Drawer Tote	8 <sup>1</sup> / <sub>2</sub> x 18 <sup>1</sup> / <sub>4</sub> x 17 <sup>1</sup> / <sub>2</sub> 216x464x445	<b>SXR9TOTE</b>	<b>SXR9-LKTOTE</b>

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).



## Accessories for Units with Slotted Polymer Inner Panels

### Polymer Shelves

Cat. No.	Description
<b>SXRPOLY</b>	Single Wide Polymer Shelf
<b>SXRPOLYDIV</b>	Poly Shelf Divider Kit (Includes 2 Divider Rails, 4 Dividers)
<b>SXRSF-VSHFDIV</b>	Single Wide Vertical Shelf Divider Kit (w/(2) brackets & (2) vertical dividers)
<b>SXRDF-VSHFDIV</b>	Double Wide Vertical Shelf Divider Kit (w/(2) brackets & (2) vertical dividers)
<b>SXRFVDIV-1</b>	Extra Vertical Shelf Divider



Polymer shelves are easy to clean and reposition.

### Suture Storage

Cat. No.	Description
<b>SXRSUTURE</b>	Suture Storage Module



Suture Storage

### Full-Extension Totes/Dividers


Cat. No.	Description
<b>SXRFTOT3</b>	3" Full Extension Tote/Frame Assembly
<b>SXRFTOT6</b>	6" Full Extension Tote/Frame Assembly
<b>SXRFTOT9</b>	9" Full Extension Tote/Frame Assembly
<b>SXR3DIV</b>	3" Tote Divider Kit (Includes (2) Long Dividers & (6) Short Dividers)
<b>SXR3SDIV</b>	3" Short Divider Kit (3-Pack)
<b>SXR3LDIV</b>	3" Long Divider Kit (2-Pack)
<b>SXR6DIV</b>	6" Tote Divider Kit (Includes (2) Long Dividers & (6) Short Dividers)
<b>SXR6SDIV</b>	6" Short Divider Kit (3-Pack)
<b>SXR6LDIV</b>	6" Long Divider Kit (2-Pack)
<b>SXR3RDVR</b>	3" Eggcrate Style Tote Divider Kit
<b>SXR6RDVR</b>	6" Eggcrate Style Tote Divider Kit



Full Extension Tote and Basket

### Full-Extension Baskets/Dividers

Cat. No.	Description
<b>SXRFBSK3</b>	3" Full Extension Basket/Frame Assembly
<b>SXRFBSK7</b>	7.5" Full Extension Basket/Frame Assembly
<b>SXRFB3SDIV</b>	3" Short Basket Dividers (3-Pack)
<b>SXRFB3LDIV</b>	3" Long Basket Dividers (2-Pack)
<b>SXRFB7SDIV</b>	7.5" Short Basket Dividers (3-Pack)
<b>SXRFB7LDIV</b>	7.5" Long Basket Dividers (2-Pack)



Baskets

### Additional Baskets

Cat. No.	Description	Color	Qty.	Length/Height (in.)	(mm)
<b>BSKT3</b>	3" (76mm) H. Basket	White	6	3 1/4 x 20 3/4 x 16 3/4	83 x 527 x 425
<b>BSKT7</b>	7" (178mm) H. Basket	White	6	7 1/4 x 20 3/4 x 16 3/4	184 x 527 x 425

Wire grid space: 1 1/8" x 1 1/8" (29 x 29mm)

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.





SXR243



SXRMON



SXRLAP

## Corner Accessories

Description	Dimensions — Inches (millimeters)	Cat. No.
Articulating Laptop Arm	18" Extension, 10" Vertical Range	<b>SXRLAP</b>
Articulating LCD Monitor Arm	Includes: 75 & 100mm VESA adapters	<b>SXRMON</b>
Articulating Tablet PC Arm	Rotates for Writing or Drawing	<b>SXRTAB</b>
Articulating Arm Mounting Pole*	Order with Laptop, Monitor or Tablet Arms	<b>SXR-ARMPOLE</b>
Hospital Grade Power Strip & Cord Wrap	6 Outlets, 15" Cord	<b>SXR595</b>
I.V. Utility Pole	Attaches directly to left or right rear cart corner	<b>SXRIV</b>
Peel Pouch/Catheter Holder-18"	18H (457) x 6W (152) x 3D (76)	<b>SXR240</b>
Peel Pouch/Catheter Holder-28"	27H (686) x 6W (152) x 3D (76)	<b>SXR243</b>

\*Mounting pole ordered separately.



Accessorized Podson Starsys cart

## Side Pods — All side pods are 30"H x 19.5"W x 6"L (762 x 483 x 152mm)

Description	Cat. No.
Fixed Side Pod (Non-Locking)	<b>SXRPD</b>
Fixed Side Pod (with Top-Locking Tilt Bin)*	<b>SXRPDCK1</b>
Fixed Side Pod (with 3-Locking Tilt Bins)**	<b>SXRPDCK3</b>
Left Swing-out Side Pod (Non-Locking)	<b>SXRPDCL</b>
Left Swing-out Side Pod (with Top-Locking Tilt Bin)*	<b>SXRPDCLK1</b>
Left Swing-out Side Pod (with 3 Locking Tilt Bins)**	<b>SXRPDCLK3</b>
Right Swing-out Side Pod (Non-Locking)	<b>SXRPDCR</b>
Right Swing-out Side Pod (with Top Locking Tilt Bin)*	<b>SXRPDCRK1</b>
Right Swing-out Side Pod (with 3-Locking Tilt Bins)**	<b>SXRPDCRK3</b>

\*Top Tray with Dividers and Tilt Bin included.


\*\*Top Tray with Dividers and 3 Tilt Bins included.



SXR GAS



SXRPDL DGE



SXRPDL BIN

## Side Pod Accessories

Description	Dimensions — Inches (millimeters)	Cat. No.
Chart Holder	9 <sup>9</sup> / <sub>16</sub> H (242) x 11 <sup>1</sup> / <sub>2</sub> W (292) x 4 3/4L (121)	<b>SXRCHRT</b>
Containment Shelf Ledge	1 <sup>1</sup> / <sub>2</sub> H (38) 16L (406) x 3 <sup>1</sup> / <sub>2</sub> D (89)	<b>SXRPDL DGE</b>
Cup Holder <sup>1</sup>	Cup Sizes: 1 <sup>3</sup> / <sub>8</sub> (35), 2 (51), 2 <sup>1</sup> / <sub>2</sub> (64)	<b>SXRCUP</b>
Gas Tank Holder <sup>2</sup>	Holds C, D and E Tanks	<b>SXRGAS-H</b>
Glove Box Holder — Single	6 <sup>1</sup> / <sub>8</sub> H (156) x 10 <sup>1</sup> / <sub>8</sub> W (258) x 4L (102)	<b>FL236</b>
Glove Box Holder — Triple	18 <sup>1</sup> / <sub>4</sub> H (464) x 10 <sup>1</sup> / <sub>8</sub> W (258) x 5 <sup>1</sup> / <sub>2</sub> L (140)	<b>FL237</b>
Lockable Sharps Container & Glove Box	18 <sup>1</sup> / <sub>4</sub> H (464) x 13W (330) x 5 <sup>1</sup> / <sub>2</sub> L (140)	<b>SXR251</b>
Lockable Sharps Replacement Containers	20/Pack, 5 Qt. (4.7L) Capacity	<b>SXRMF252</b>
Sharps Container Holder	9.3H (236) x 8W (203) x 3L (76)	<b>SXRSHRPS</b>
Tilt Out Bin	7 <sup>1</sup> / <sub>2</sub> H (191) 16L (406) x 3 <sup>1</sup> / <sub>2</sub> D (89)	<b>SXRPDL BIN</b>
Top Tray (with 3 Dividers) <sup>1</sup>	2 <sup>1</sup> / <sub>2</sub> H (57) x 16 <sup>7</sup> / <sub>8</sub> W (429) x 4 <sup>3</sup> / <sub>8</sub> L (111)	<b>SXRPDLTRY</b>
Unit Shelf	4 <sup>1</sup> / <sub>2</sub> D (115) x 16 <sup>7</sup> / <sub>8</sub> D (429) x 16 <sup>7</sup> / <sub>8</sub> W (429)	<b>SXRPDL SHLF</b>
Waste Basket & Holder	Holder: 15.5H (394) x 8W (203) x 3L (76)	<b>SXRBSKT-H</b>
Waste Basket Only	12 <sup>1</sup> / <sub>4</sub> H (311) x 11 <sup>1</sup> / <sub>4</sub> W (286) x 8 <sup>1</sup> / <sub>4</sub> D (210)	<b>SXRBSKT</b>

<sup>1</sup>Attached to top of Unit Shelf (SXRFDL SHLF).

<sup>2</sup>One or two allowed on Fixed Non-Locking Pods Only.

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).



## STARSYS® CART ACCESSORIES — SIDE ACCESSORIES AND OVERBRIDGES

### Side Accessory Bracket

Description	Dimensions — Inches (millimeters)	Cat. No.
Side Accessory Bracket	4 <sup>3</sup> / <sub>8</sub> H (111) x 19 <sup>3</sup> / <sub>8</sub> W (492)	SXR205



SXR205 Accessory Bracket

### Side Accessory Bracket Accessories

Description	Dimensions — Inches (millimeters)	Cat. No.
Chart Holder <sup>1</sup>	9 <sup>9</sup> / <sub>16</sub> H (242) x 11 <sup>1</sup> / <sub>2</sub> W (292) x 4 <sup>3</sup> / <sub>4</sub> L (121)	SXRCHRT
Gas Tank Holder — Single <sup>2</sup>	Holds C, D and E Tanks	SXRGAS-H
Glove Box Holder — Single <sup>1</sup>	6 <sup>1</sup> / <sub>8</sub> H (156) x 10 <sup>1</sup> / <sub>8</sub> W (258) x 4L (102)	FL236
Glove Box Holder — Triple <sup>2</sup>	18 <sup>1</sup> / <sub>4</sub> H (464) x 10 <sup>1</sup> / <sub>8</sub> W (258) x 4L (102)	FL237
Side Bins (3 Pack) <sup>3</sup>	4 (102) x 4 <sup>1</sup> / <sub>2</sub> (114) x 18 <sup>3</sup> / <sub>8</sub> (254)	MBP216
Waste Basket and Holder <sup>1</sup>	Holder: 15.5H (394) x 8W (203) x 3L (76)	SXRBSKT-H
Waste Basket Only	12 <sup>1</sup> / <sub>4</sub> H (311) x 11 <sup>1</sup> / <sub>4</sub> W (286) x 8 <sup>1</sup> / <sub>4</sub> D (210)	SXRBSKT



SXR205, SXR251

\*Accessory Bracket(s) included.

<sup>1</sup>Order with (1) SXR205 Accessory Bracket.

<sup>2</sup>Order with (2) SXR205 Accessory Brackets.

<sup>3</sup>Order with (3) SXR205 Accessory Brackets.

### Other Accessories

Description	Dimensions — Inches (millimeters)	Cat. No.
Extended Handle	4H (102) x 21 <sup>1</sup> / <sub>2</sub> W (546) x 4 <sup>1</sup> / <sub>4</sub> L (108)	SXREHAN
Extended Handle (Field Retrofit)	4H (102) x 21 <sup>1</sup> / <sub>2</sub> W (546) x 4 <sup>1</sup> / <sub>4</sub> L (108)	SXREHAN-KD
Pullout Writing Surface (Left Side)	17.5"W (445) x 15.75"L (400); (25 lb. cp.)	SXRPULLOUTL
Pullout Writing Surface (Right Side)	17.5"W (445) x 15.75"L (400); (25 lb. cp.)	SXRPULLOUTR
Single Wide Full-Extension Keyboard Tray	16 <sup>3</sup> / <sub>8</sub> " (417) x 13 <sup>5</sup> / <sub>8</sub> "L (346) x 2 <sup>5</sup> / <sub>8</sub> " (67)	SXRSKBT
Double Wide Full-Extension Keyboard Tray	36 <sup>1</sup> / <sub>4</sub> " (920) x 13 <sup>5</sup> / <sub>8</sub> "L (346) x 2 <sup>5</sup> / <sub>8</sub> " (67)	SXRDKBT
Backlit Keyboard with Clear Cover (Fits Single or Double Wide KBD Trays)		SXRKBD



SXRPULLOUTL



SXRSKBT



SXRDKBT




SXRKBD

### Overbridge and Accessories

Description	Cat. No.
(A) Overbridge Assembly with two Hanger Rails**	SXRSOB
Overbridge Assembly with no Hanger Rails	SXRSOB-1000
(B) Hanger Rail (2 <sup>3</sup> / <sub>16</sub> " [55mm] H.x1" [25.4mm] W.x19 <sup>1</sup> / <sub>2</sub> " [495mm] L. usable space)	SXROBSRAIL
Overbridge with Top Shelf and Hanger Rail	SXR515
Overbridge with 2 Shelves	SXR520
Overbridge Shelf***	SXR560
Utility Pole Including Universal Clamp (Attaches to Overbridge)	SXR566
Universal Clamp	SXR570
Short Utility Hook (package of 4) (3 <sup>1</sup> / <sub>2</sub> " [89mm] usable length)	SXR571
Laryngoscope Blade/Specimen Holder	SXR575
(C) Half-Size Metal Utility Bin (5 <sup>1</sup> / <sub>2</sub> " [140mm] H.x5 <sup>1</sup> / <sub>2</sub> " [140mm] W.x5 <sup>3</sup> / <sub>4</sub> " [146mm] L.)	SXR581
(D) Full-Size Metal Utility Bin (5 <sup>1</sup> / <sub>2</sub> " [140mm] H.x5 <sup>1</sup> / <sub>2</sub> " [140mm] W.x11 <sup>5</sup> / <sub>8</sub> " [292mm] L.)	SXR582
Label/Tape Dispenser	SXR583
Wire Supply Basket (7" [178mm] H.x5" [127mm] W.x17" [432mm] L.)	SXR585
(E) Utility Bin with Cover (Package of 6)	SXR586
†† Sharps Container Bracket	LEC9800
Tilt Bin 3 Units with Brackets	SXRMF543
Tilt Bin 4 Units with Brackets	SXRMF544
Tilt Bin 6 Units with Brackets	SXRMF546



SXREHAN

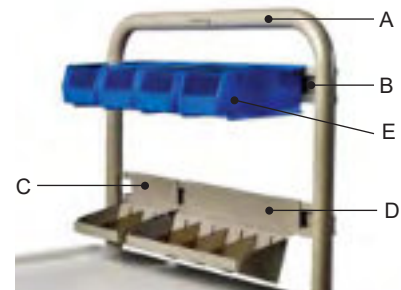

SXRSOB Overbridge Assembly  
(shown with optional accessories)

\*\* Maximum weight capacity for overbridge assembly is 40 lbs. (18.1kg).

\*\*\* Maximum weight capacity for overbridge shelf is 40 lbs. (18.1kg).

† Mounts to universal clamp in addition to hanger rail.

†† Mounts to I.V. pole or utility pole.

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



SXRSLDGLedge



SXRSFLDIV



Metro Totes



Heavy-Duty Drawer\*

\*A keylock module is required in all heavy-duty drawers specified in mobile applications. See [www.metroconfigurator.com](http://www.metroconfigurator.com)

## Shelves & Accessories for Units with qwikSLOT Inserts

### Wire Shelves

Cat. No.	Description
<b>SXRSWQ</b>	Single Wide QS Wire Shelf
<b>SXRSWAR</b>	Single Wide Full Extension Wire Shelf (Right Thumb Latch)
<b>SXRSWAL</b>	Single Wide Full Extension Wire Shelf (Left Thumb Latch)
<b>SXRDWQ</b>	Double Wide QS Wire Shelf
<b>SXRDWAR</b>	Double Wide Full Extension Wire Shelf (Right Thumb Latch)
<b>SXRDWAL</b>	Double Wide Full Extension Wire Shelf (Left Thumb Latch)
<b>2148CI-4</b>	Clear Inlays for Wire Shelves (4-Pk)
<b>9990P7</b>	Label Holder for Single Wide Wire Shelf
<b>9990P8</b>	Label Holder for Double Wide Wire Shelf
<b>SXRSLDG</b>	4"H Wire Shelf Ledge
<b>SXRSFLDIV</b>	4"H Wire Shelf Divider
<b>SXRSFLDIV8</b>	8"H Wire Shelf Divider

### Metro Totes

Outside Dimensions (Includes lip) Length x Width (in.) (mm)		Inside Dimensions Length x Width (in.) (mm)		Height O.D. (in.) (mm)		I.D.* (in.) (mm)		Capacity (cu. ft.) (cu. m.)		Approx. Tote Box Wt. (lbs.)	Cat. No.
22 1/2 x 17 1/2	572 x 445	20 1/4 x 15 1/8	514 x 384	3	76	2.5	64	.44	0.017	2.57	<b>MTB93030W</b>
22 1/2 x 17 1/2	572 x 445	20 1/4 x 15 1/8	514 x 384	5	127	4.5	114	.79	0.02	4.0	<b>MTB93050W</b>
22 1/2 x 17 1/2	572 x 445	20 1/4 x 15 1/8	514 x 384	6	152	5.5	140	.97	0.027	4.0	<b>MTB93060W</b>
22 1/2 x 17 1/2	572 x 445	20 1/4 x 15 1/8	514 x 384	8	203	7.5	191	1.32	0.037	5.25	<b>MTB93080W</b>
22 1/2 x 17 1/2	572 x 445	20 1/4 x 15 1/8	514 x 384	12	305	11.5	292	2.03	0.057	6.67	<b>MTB93120W</b>

\*Loading height restrictions when using covers or stacking totes.

Note: Other Metro totes available. See page 228.

### Dividers

For Tote Box	Dividers	Maximum Tote	For Tote Box	Dividers	Maximum Tote
MTB93030W	Short <b>MDS93030NAT</b>	15	MTB93080W	Short <b>MDS93080NAT</b>	15
	Long <b>MDL93030NAT</b>	11		Long <b>MDL93080NAT</b>	11
MTB93060W	Short <b>MDS93060NAT</b>	15	MTB93120W	Short <b>MDS93080NAT</b>	15
	Long <b>MDL93060NAT</b>	11		Long <b>MDL93080NAT</b>	11

## Heavy-Duty Drawers\* & Accessories

All Starsys Heavy-Duty drawers have an interior front-to-back dimension of 19.188" (487mm). Single Heavy-Duty drawers have an interior width of 16.375" (416mm). Double Heavy-Duty drawers have an interior width of 36.250" (920mm).

Description	Interior Depth (in.)      (mm)		Cat. No.
Heavy-Duty Drawers —Single			
3" (76mm) SW Starsys Heavy-Duty Drawer	2 <sup>3</sup> / <sub>8</sub>	60	SXRS3HD
6" (152mm) SW Starsys Heavy-Duty Drawer	5 <sup>3</sup> / <sub>8</sub>	136	SXRS6HD
9" (229mm) SW Starsys Heavy-Duty Drawer	8 <sup>3</sup> / <sub>8</sub>	213	SXRS9HD
12" (305mm) SW Starsys Heavy-Duty Drawer	11 <sup>3</sup> / <sub>8</sub>	289	SXRS12HD
Heavy-Duty Drawers —Double			
3" (76mm) DW Starsys Heavy-Duty Drawer	2 <sup>3</sup> / <sub>8</sub>	60	SXRD3HD
6" (152mm) DW Starsys Heavy-Duty Drawer	5 <sup>3</sup> / <sub>8</sub>	136	SXRD6HD
9" (229mm) DW Starsys Heavy-Duty Drawer	8 <sup>3</sup> / <sub>8</sub>	213	SXRD9HD
12" (305mm) DW Starsys Heavy-Duty Drawer	11 <sup>3</sup> / <sub>8</sub>	289	SXRD12HD
Heavy-Duty Drawer Dividers —Single			
3" (76mm) SW Drawer Divider Kit			SXRS3HDIV
6" (152mm) SW Drawer Divider Kit			SXRS6HDIV
Heavy-Duty Drawer Dividers —Double			
3" (76mm) DW Drawer Divider Kit			SXRD3HDIV
6" (152mm) DW Drawer Divider Kit			SXRD6HDIV
Drawer Label Kits			
Label Kit			SXRLABKIT

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

## Mechanical Keylocks

The M300 Series Keylocks have an "Ignition-Style" design to protect keys from bending or breaking. Mechanical keylocks are a good choice for all kinds of applications and work on all types of units and accessories—carts, cabinets, drawers, doors and wall cabinets. They are available as primary locks or as backups for other types of locking systems. Each lock includes a set of two keys. Extra keys available upon request.

## Electronic Touchpad Locking Systems

**Basic** —Our entry level keyless electronic drawer locking system is designed for single-wide carts in heights from 36" to 48" tall.


### Features:

- 238 User/Supervisor codes, plus up to 12 Facility Code Access entries
- Auto-relock with software adjustable timeout settings
- Low-Frequency (125 kHz) and High-Frequency (13.56 MHz) Proximity Card Reader Options
- Facility Code Access option allows users to match a generic login based on proximity card data
- Cart audit trail data capability (last 1,500 access events)
- USB connection for cart settings, audit trail reporting, and user updates
- Optional LockView 5Pro Software

**Advanced and Advanced Wireless** —Keyless electronic drawer locking system with wireless option is designed for single-wide and double-wide carts in heights from 36" to 48" tall.

### Features everything from our Basic system, plus:

- 2988 User/Supervisor codes, plus up to 12 Facility Code Access entries
- Cart audit trail data capability (last 15,000 access events)
- Wireless model allows for cart data exchange over an 802.11 A, B, G, or N (2.4/5.0 GHz) Wi-Fi connection
- Multiple Bay Security



M300 Series Lock



Electronic Touchpad Locking System (Wireless model shown)

Description	Cat. No.
Basic Keyless Entry Touchpad - Single Bay Locking	SXRX412
Advanced Keyless Entry Touchpad - Single Bay Locking	SXRX420
Advanced Keyless Entry Touchpad - Double Bay Locking	SXRX420-2
Advanced Keyless Entry Touchpad with Wireless - Single Bay Locking	SXRX420W
Advanced Keyless Entry Touchpad with Wireless - Double Bay Locking	SXRX420W-2
Factory-Installed Low-Frequency (125 kHz) Proximity Card Reader	SXRX430PLF*
Factory-Installed High-Frequency (13.56 MHz) iClass/SE/Seos Proximity Card Reader	SXRX430PHF*
Standard Low-Frequency (125 kHz) Proximity User Card	SXR-UPROXCRD
Standard Low-Frequency (125 kHz) Proximity Key Ring Tag	SXR-PROXTAG
LockView 5Pro Touchpad Management Software	SXRX423

\* Proximity card readers are compatible with most industry standard data formats. In some cases, a sample card may need to be submitted to verify compatibility.

## Tamper-Evident (Passive Security) Locks

Provides passive security for each drawer individually. Quick visual confirmation of broken seals indicates which drawers have been opened. Includes factory-installed lockbar, drawer locktabs permanently riveted to each drawer, and 100 security seals.

Description	Cat. No.
24" (610mm) Security Bar, Drawer Tabs & Seals	SXRPBLSK-24
27" (686mm) Security Bar, Drawer Tabs & Seals	SXRPBLSK-27
30" (762mm) Security Bar, Drawer Tabs & Seals	SXRPBLSK-30
33" (839mm) Security Bar, Drawer Tabs & Seals	SXRPBLSK-33
36" (914mm) Security Bar, Drawer Tabs & Seals	SXRPBLSK-36



Tamper-Evident Locks

## Starsys Carts — Security Options

### Hinged Push-Button Lockbars

These versatile push button lockbars can be used to lock both drawers and doors. Because the push button mechanism is purely mechanical, no wiring, electronic or batteries are required. Each lockbar includes a backup M300 series keylock, 2 keys, and a passive security locktab (security seals ordered separately: LEC320= Bag of 100).

For Factory-Assembled Units

Description	Left Mounted Cat. No.	Right Mounted Cat. No.
24"H (610mm) Hinged Lockbar	SXRPBL24L	SXRPBL24R
27"H (686mm) Hinged Lockbar	SXRPBL27L	SXRPBL27R
30"H (762mm) Hinged Lockbar	SXRPBL30L	SXRPBL30R
33"H (839mm) Hinged Lockbar	SXRPBL33L	SXRPBL33R
36"H (914mm) Hinged Lockbar	SXRPBL36L	SXRPBL36R

For field retrofit of above key locking bars, add suffix -KD to above part numbers.



Hinged Lockbar

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



# Let's get to work...



## Starsys WorkCenters

WorkCenters can be stand alone products or can be a configured section within a larger product configuration. WorkCenters combine valuable lower storage areas with finished modular countertops to offer a complete storage and work area solution.

Starsys WorkCenters are made up of two key components: base units and countertops. Understanding how these two elements work together is the key to understanding the Starsys WorkCenters line. While sections of Starsys WorkCenters can be configured into many physical combinations, these sections are typically divided into two categories: "straight run" or "corner" configurations.

Working Heights: Starsys WorkCenters are available in the following working heights: 30" (762mm), 33" (838mm), 36" (914mm), 39" (990mm) and 42" (1067mm). Within each working height there is up to 2.5" (64mm) of additional height adjustment via the four adjustable leveling feet in each base unit.

## Starsys Base Units

Base units are the most critical part of a configuration with countertops. Their total combined length and placement will determine the length of the associated countertops in the design. Their placement will determine the placement and size of necessary knee wells and provide support for valuable corner work areas. All Starsys base units are available in light taupe but have the flexibility to be accented with various door & drawer handle colors. Countertop color selection and cove base color selections may be used to accent the base unit color.

### Starsys Base Units widths and depth:

The Starsys cart system is built upon a square module. Multiplying this storage module results in system widths of single 22<sup>3</sup>/<sub>4</sub>" (578mm), double 42<sup>1</sup>/<sub>2</sub>" (1080mm) and triple 62<sup>1</sup>/<sub>2</sub>" (1588mm) widths. The depth on all carts is 24.9" (632mm).

### Starsys Base Unit heights:

Starsys carts are available in the following working heights: 36" (907mm), 39" (983mm), 42" (1060mm), 45" (1136mm) and 48" (1212mm).

For overhead units and accessories, see page 209.

Microban® antimicrobial protection inhibits the growth of stain and odor-causing bacteria on Starsys, keeping the surface areas "cleaner between cleanings."

## WorkCenter Countertop Colors

- Laminate and solid surface offerings provide a variety of color options that work flawlessly with all body and pull combinations.
- Multiple color options to compliment any decor.
- Special colors and materials are available upon request.

### Solid Surface Colors



Platinum



Matterhorn



Silt



Flint

**Note:** Colors may be discontinued at any time. Please verify with your local representative.


### Laminate Colors



Grey Glace



Tungsten EV



Nickel EV



Carbon EV

**Note:** Colors may be discontinued at any time. Please verify with your local representative.

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

## Preconfigured WorkCenter BaseUnits



Cat. No. **SXRS30BU1**



Cat. No. **SXRS30BU2**



Cat. No. **SXRS30BU3**



Cat. No. **SXRS30BU4**



Cat. No. **SXRS30BUHD1**



Cat. No. **SXRD30BU1**



Cat. No. **SXRD30BU2**



Cat. No. **SXRD30BUHD1**



Cat. No. **SXRD30BUHD2**



Cat. No. **SXRS36BU1**



Cat. No. **SXRS36BU2**



Cat. No. **SXRS36BU3**



Cat. No. **SXRS36BU4**



Cat. No. **SXRS36BU6**



Cat. No. **SXRS36BUHD1**



Cat. No. **SXRS36BUHD2**



Cat. No. **SXRD36BU1**



Cat. No. **SXRD36BU2**

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.

## Preconfigured WorkCenter BaseUnits



Cat. No. **SXRD36BU3**



Cat. No. **SXRD36BU4**



Cat. No. **SXRD36BU6**



Cat. No. **SXRD36BUHD2**



Cat. No. **SXRS39BU1**



Cat. No. **SXRS39BU3**



Cat. No. **SXRD39BU4**



Cat. No. **SXRD39BU6**



Cat. No. **SXRD39BUHD1**



Cat. No. **SXRD39BUHD2**

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

## Base Unit Trim Kits

Description	Cat. No.
<b>BackWall Trim Kits —25" Deep Countertops</b>	
Back Wall Trim Kit x 39 (all heights)	SXR39BKFLR
<b>Back-to-Back Cabinet Trim Kits —25" Deep Countertops</b>	
Back to Back Filler for 30" H — 25" Countertop	SXR30BBFLR
Back to Back Filler for 33" H — 25" Countertop	SXR33BBFLR
Back to Back Filler for 36" H — 25" Countertop	SXR36BBFLR
Back to Back Filler for 39" H — 25" Countertop	SXR39BBFLR
Back to Back Filler for 42" H — 25" Countertop	SXR42BBFLR
<b>BackWall Trim Kits —30" Deep Countertops</b>	
Back Wall Trim for 30" H — 30" Countertop	SXR30BKFLR30
Back Wall Trim for 33" H — 30" Countertop	SXR33BKFLR30
Back Wall Trim for 36" H — 30" Countertop	SXR36BKFLR30
Back Wall Trim for 39" H — 30" Countertop	SXR39BKFLR30
Back Wall Trim for 42" H — 30" Countertop	SXR42BKFLR30
<b>Back-to-Back Cabinet Trim Kits —30" Deep Countertops</b>	
Back to Back Filler for 30" H — 30" Countertop	SXR30BBFLR30
Back to Back Filler for 33" H — 30" Countertop	SXR33BBFLR30
Back to Back Filler for 36" H — 30" Countertop	SXR36BBFLR30
Back to Back Filler for 39" H — 30" Countertop	SXR39BBFLR30
Back to Back Filler for 42" H — 30" Countertop	SXR42BBFLR30
<b>Unit-to-Unit Filler Kits</b>	
Unit to Unit Filler Strip Kit (10 pieces/kit)	SXR72UUFLR
<b>Corner Filler Kits</b>	
45 Degree Corner Filler Strip Kit x 84	SXR84CR45FLR
90 Degree Corner Filler Strip Kit x 84	SXR84CR90FLR

## WorkCenter Base Unit Accessories

Description	Cat. No.
<b>Kneewell Options and Accessories</b>	
Undercounter Keyboard Tray	SXRKYBDTRY
30 Brkt Assembly Blank	SXR30BRKT
30 Brkt Assembly Keyboard Tray	SXR30BRKTKB
30 Brkt Assembly Pencil Drawer	SXR30BRKTPN
42 Brkt Assembly Blank	SXR42BRKT
42 Brkt Assembly Keyboard Tray	SXR42BRKTKB
42 Brkt Assembly Pencil Drawer	SXR42BRKTPN
<b>Sink Valance</b>	
Sink Valance Kit	SXRSINKVLC
<b>Floor Mounting Kit</b>	
Floor Mounting Kit	SXR-FLR

## Countertop Accessories

Description	Cat. No.
<b>Countertop Mounting Brackets</b>	
Counter to Counter Bracket	SXRCCBRKT
Counter to Wall Bracket	SXRCWBRKT
Offset Counter Bracket — 3	SXR0ST3BRKT
Offset Counter Bracket — 6	SXR0ST6BRKT
Offset Counter Bracket — 9	SXR0ST9BRKT
<b>Countertop Hole Grommet Kits</b>	
Hole Grommet Kit	SXRHOLEGRMT



Valance Kit



30" Kneewell Bracket with Pencil Drawer Option

### Countertop Support Brackets:

The counter-to-counter bracket allows a countertop adjacent to a WorkCenter section with baseunit to be supported at the same working height without the need for an additional baseunit. The offset counter bracket allows for similar configurations but accommodates change in the working heights by dropping the adjacent countertop by 3", 6", or 9" (76, 152, or 229mm) as required by the application.



## Starsys® WorkCenters — Sinks, Fixtures and Eye Washes — {8.01}

Below is a sampling of the wide variety of single- and double-bay sinks, faucets, eye washes and other fixtures available with countertop units: black epoxy sinks, stainless steel sinks (lipped or undermount), standard and laboratory grade faucets (deck or floor mount). Pure water and pre-rinse faucets also available. Consult your Metro representative.



### Stainless Steel Sink and Faucet Kit

Includes 12" x 12" x 7 1/2" (305 x 305 x 191mm) stainless steel sink bowl, chrome-plated faucet (6" [152mm] swivel gooseneck wrist blade handles), trap and drain.

Cat. No. **SC0459**



### Laboratory Mixing Faucet

Deck mounted, 6" (152mm) swing vacuum breaker, 10 serration hose end gooseneck, four arm handles.

Cat No. **SC0734A**



### Stainless Steel Sink and Faucet Kit

Includes 14" x 18" x 7 1/2" (356 x 457 x 191mm) stainless steel sink bowl, chrome-plated faucet (6" [152mm] swivel gooseneck wrist blade handles) trap and drain.

Cat. No. **SC0460**



### Laboratory Mixing Faucet

Deck mounted, 6" (152mm) swing vacuum breaker gooseneck, 10 serration hose end and four arm handles.

Cat No. **SCP1830Q**



### Black Epoxy-Lipped Sink Bowl

Includes 16" x 12" x 8" (406 x 305 x 203mm) bowl, center outlet and strainer.

Cat. No. **SCP1148F**



### Eye Wash (Rear Mount)

Polished chrome plated brass, right-hand deck mount AutoFlow,™ GS-Plus™ spray heads 90° swing-down flip-top spray head dust covers.

Cat. No. **SCP0734C**



### Black Epoxy Lipped Sink Bowl

Includes 25" x 15" x 10" (635 x 381 x 254mm) bowl, corner outlet and strainer.

Cat. No. **SCP1320B**



### Eye Wash (Right-Side Mount)

12.5" (318mm) swing away arm with swivel valve, right side deck mount, acetal dual stream heads with integral hinged covers.

Cat No. **SCP11771**

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).

# Storage...always within reach.



## Starsys Overhead Storage Solutions:

The Starsysline offers two solutions when additional wall storage is required above a WorkCenter or when overhead storage is required above a Mobile WorkCenter.

Starsys Tambour Door Units: are not available in modular sizes, they have a fixed height, width & depth. The door, lock and bottom shelf are always included in the Tambour Door units. Accessoriesship separate. Mounting hardware not included.

Height: 30" (762mm)  
Depth: 14" (356mm)  
Width: 19.5" (492mm)

Available accessories include: full depth shelves, tilt-bins, shelf bins, under-cabinet shelves, under-cabinet lighting and back filler kits. The necessary wall mount rails/hardware are included with each wall cabinet. (Wall anchoring hardware is not supplied by InterMetro).

Starsys Half-Depth Overhead Storage Units: are built on the same widths as Starsysbaseunits utilizing very similar construction, insuring that wall cabinets align with the lower product configuration in your application. Starsys Overhead Cabinets are available as single or double width cabinets in the following interior heights:

24", 27", 30", 33", 36" (610mm, 686mm, 762mm, 838mm, 914mm) add 2.5" (64mm) for overall exterior height

All Starsys overhead cabinets include corrugated polymer inner panels in their assembly as well as a clean-design back panel, molded with the cosmetic side facing the inside of cabinet, creating a much cleaner appearance — especially when used without doors or in conjunction with a clear door. The necessary wall mount rails/hardware are included with each wall cabinet. (wall anchoring hardware is not supplied by InterMetro).

Microban® antimicrobial protection inhibits the growth of stain and odor-causing bacteria on Starsys, keeping the surface areas "cleaner between cleanings."

Starsys Carts are built to exact customer specifications, therefore, they are non-cancelable, non-returnable.



Cat. No. **SXRSOH27P2C**



Cat. No. **SXRSOH27P2N**



Cat. No. **SXRSOH27P2S**



Cat. No. **SXRDOH27P2S**



Cat. No. **SXRDOH27W2C**

## Starsys Wall Cabinet Accessories



Wall Cabinets

Description	Cat. No.
<b>Wall Cabinet Shelving</b>	
Single-wide Overhead Polymer Shelf	<b>SXRSOHPS</b>
Single-wide Overhead Wire Shelf	<b>SXRSOHWE</b>
Double-wide Overhead Polymer Shelf	<b>SXRDOHPS</b>
Double-wide Overhead Wire Shelf	<b>SXRDOHWE</b>
<b>Wall Cabinet Shelf Divider Kits</b>	
Single-wide Overhead Shelf Divider Kit	<b>SXRSOHDIV</b>
Double-wide Overhead Shelf Divider Kit	<b>SXRDOHDIV</b>
<b>Under Cabinet Lighting</b>	
Single-wide Overhead Light (Valance and 1 Light)	<b>SXRSOHL</b>
Double-wide Overhead Light (Valance and 1 Light)	<b>SXRDOHL</b>
Triple-wide Overhead Light (Valance and 2 Lights)	<b>SXRTOHL</b>
Additional Overhead Light	<b>SXROHLT</b>
<b>Cassettes and Bins</b>	
1 Level Cassette Body	<b>SXRCASB1</b>
2 Level Cassette Body	<b>SXRCASB2</b>
3 Level Cassette Body	<b>SXRCASB3</b>
4 Level Cassette Body	<b>SXRCASB4</b>
5 Level Cassette Body	<b>SXRCASB5</b>
3" (76mm) wide Cassette Bin	<b>SXRBINSB3</b>
4 1/2" (114mm) wide Cassette Bin	<b>SXRBINSB4</b>
6" (152mm) wide Cassette Bin	<b>SXRBINSB6</b>
8" (203mm) wide Cassette Bin	<b>SXRBINSB8</b>
<b>Note:</b> Bins are shipped with one ID card.	
<b>Sloped Tops —Wall Cabinets</b>	
Single-wide Overhead Sloped Top	<b>SXRSOHSLOP</b>
Double-wide Overhead Sloped Top	<b>SXRDOHSLOP</b>
<b>Filler Kits —Additional Wall Mount Rails and Covers</b>	
49" (1245mm) Overhead Back Filler Kit	<b>SXROHFLR-49</b>
63" (1600mm) Mounting Rail Cover Kit	<b>SXROHFLR-63</b>
Additional Single-wide Wall Mount Bracket Kit (1 Pair)	<b>SXROHWB-22</b>
Additional Double-wide Wall Mount Bracket Kit (1 Pair)	<b>SXROHWB-42</b>

To configure a Starsys unit to your exact specifications, please visit [www.metroconfigurator.com](http://www.metroconfigurator.com).





# Trim, dry & process cannabis to perfection.



## Metro Super Erecta Drying Rack

*(Available in Stainless Steel or Chrome  
with adjustable removable tray levels)*



## Metro PrepMate MultiStation

*(Available in Stainless Steel or Chrome)*


Streamline your process using multiple levels that work together to create a workspace that maximizes every inch. Slide stainless steel work surface to extract flowers, trim and slide back to reveal and store finished product.

◀ **Slide.  
Trim.  
Finish.** ▶



**Consult your  
Metro representative  
for details.**



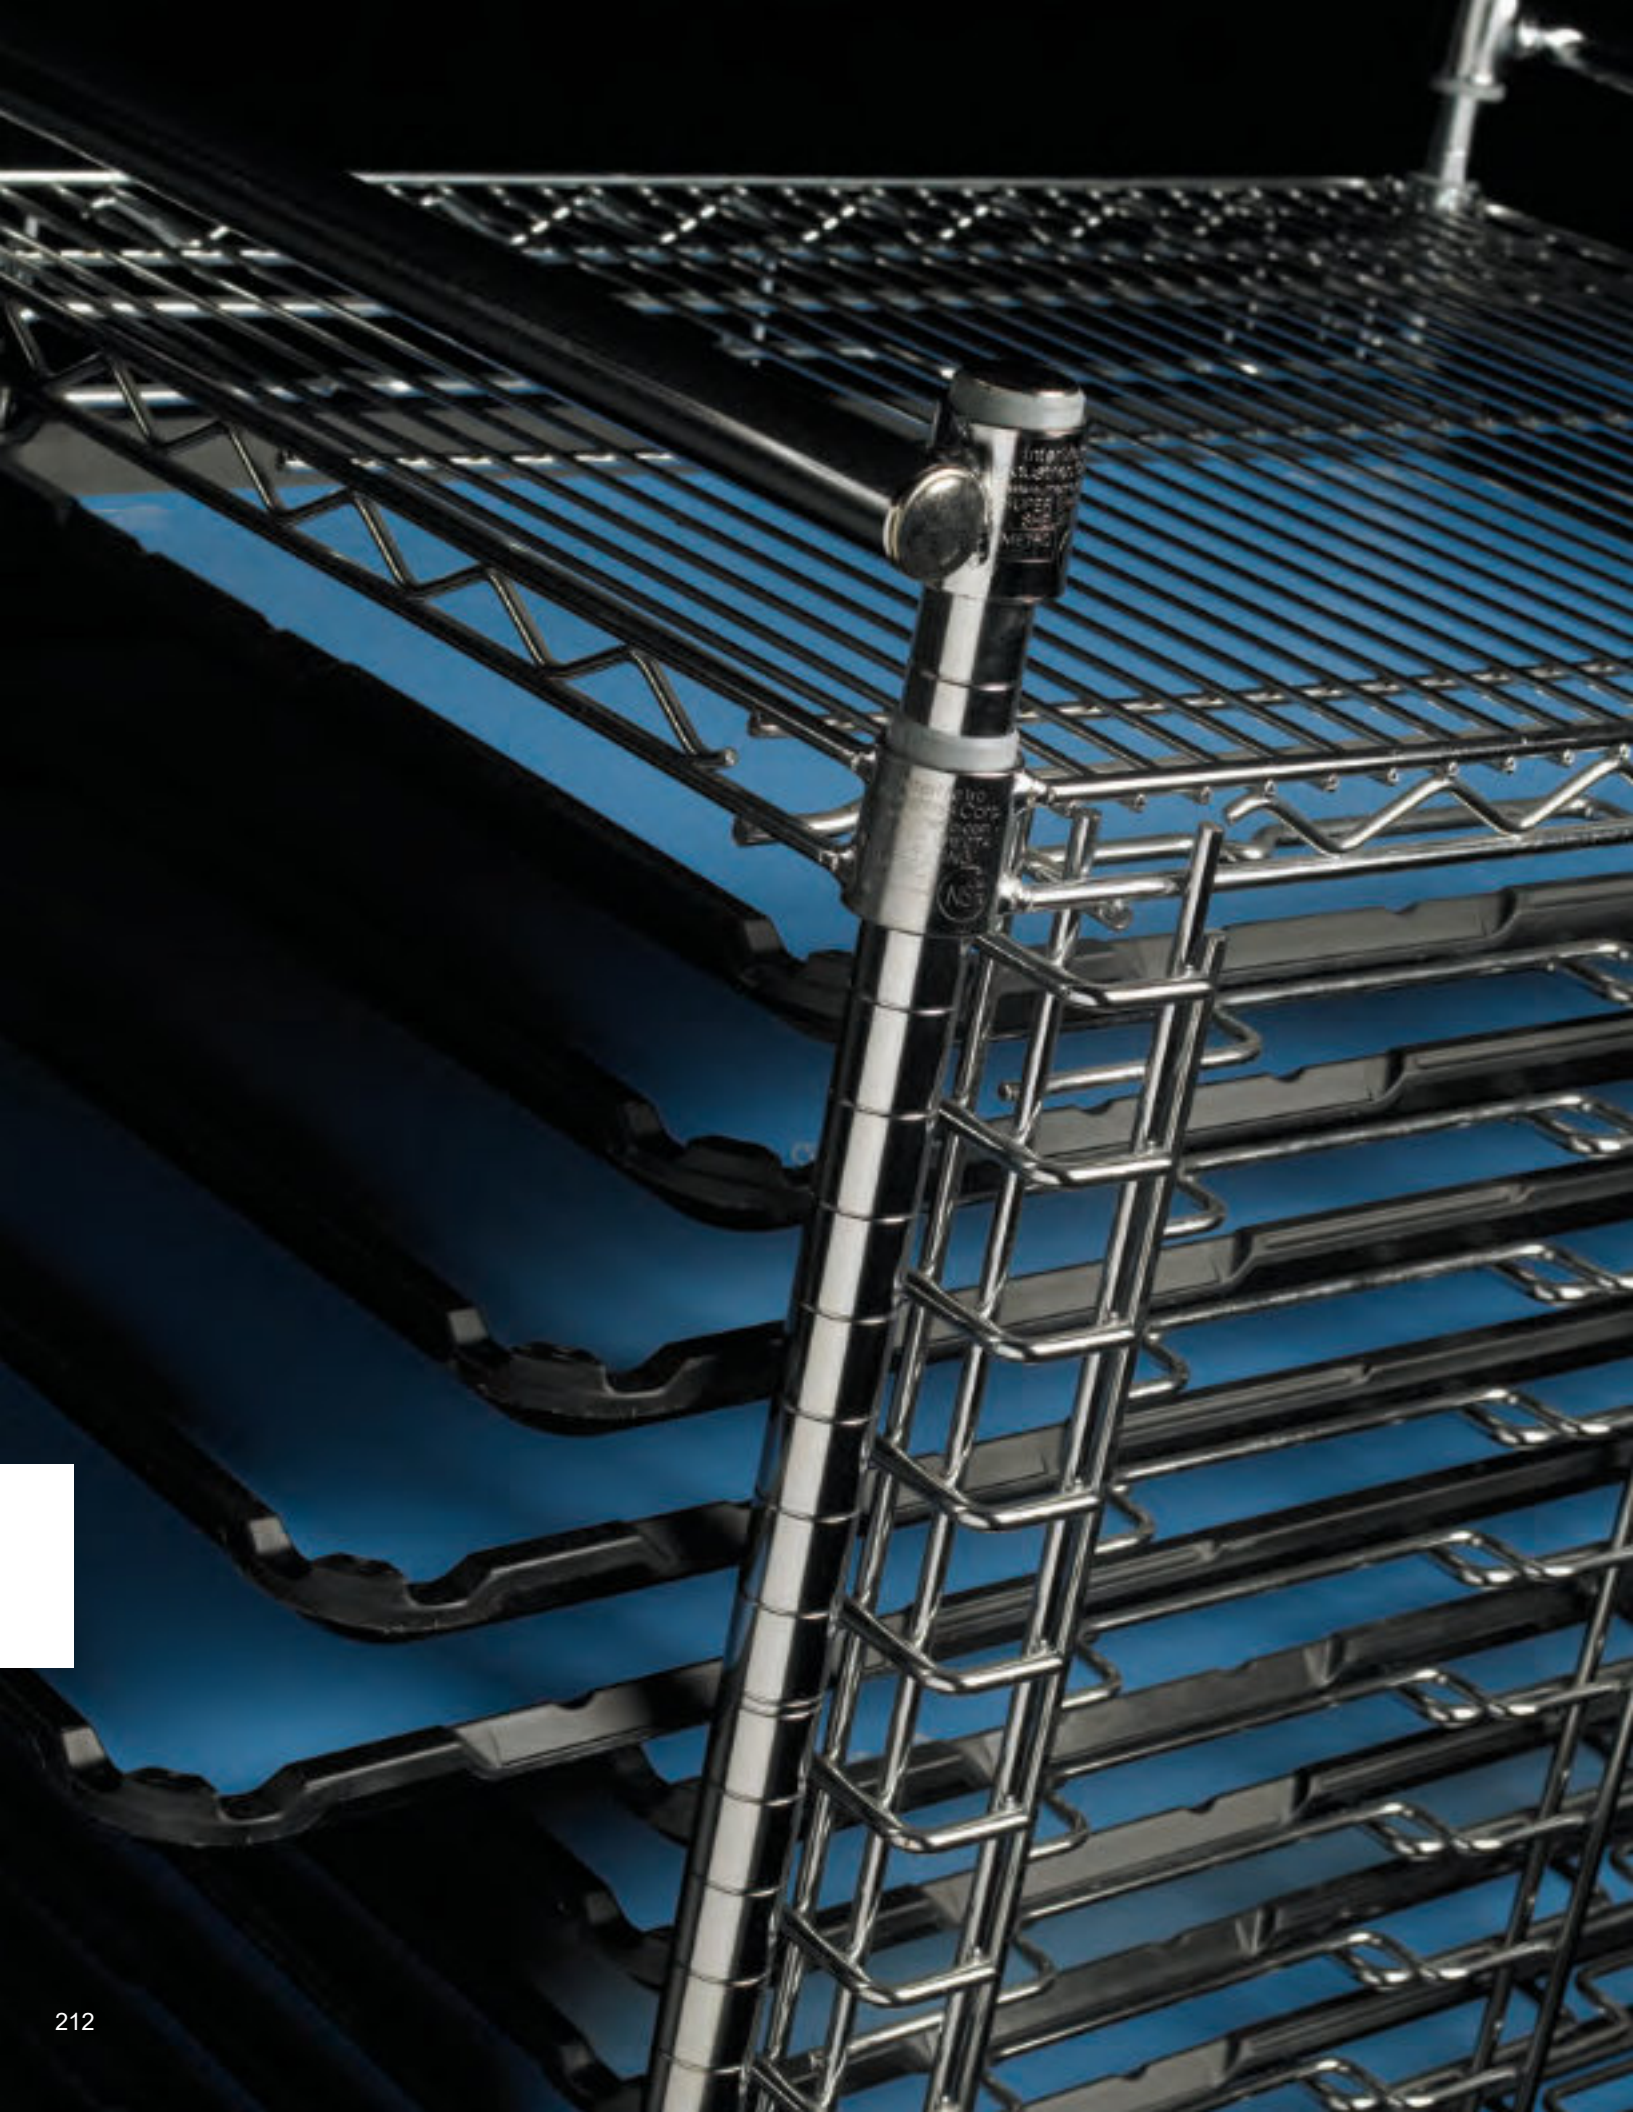


# ELECTRONICS & CLEANROOM SOLUTIONS

PCB Handling, Carts & Covers ..... 214-221  
High-Density, Reel & Stencil Storage ..... 222-225  
Casters, Accessories, Tote Boxes & Bins ..... 226-229  
Clean Tables, Carts & Gowning Room Products ..... 230-235



SmartTray features barcoding and color coding, and stacks with other trays of the same footprint.

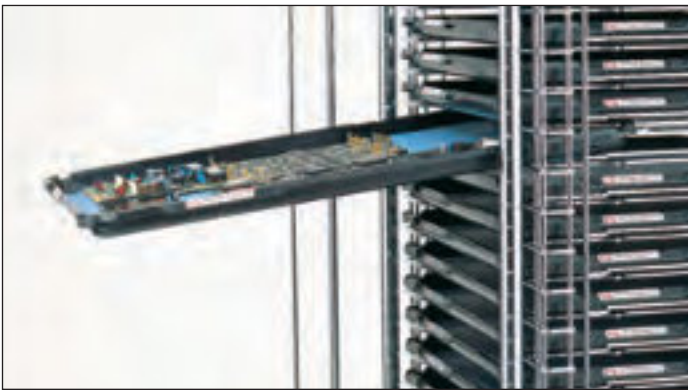

SmartTray engages with wire cart design to provide optimum ergonomic access.

### SmartTray® System

Designed to maximize productivity by accelerating throughput, minimizing PCB handling damage and providing superior ESD protection. The 18"x26" (457x660mm) footprint handles multiple-sized boards.

- The ESD-safe SmartTray facilitates efficient tracking of work-in-process and finished goods with the use of bar code technology.
- Supports lean manufacturing by offering color-coding accessories that clearly identify trays and carts.
- Molded from Metrostat™, a material offering premium ESD protection.
- SmartTray fits all Metro tray cart systems as well as competitive bottom-loaded models and most tray based cart systems in today's marketplace.

### SmartTray Cart System — {51.35}

Cat. No. **CBNTC20M**

(shown with accessories)





**SmartTray® System — {51.35}**

- Shelves, posts, slides, handles and stop bars: ESDsafe, chrome-plated finish.
- Casters: 5" (127mm) stem/swivel vibration suppression casters (5MFA series). Two brake, two swivel casters.

**SmartTrayCart Solutions (cart with trays and tray inlays)**

- Choose between Metro's premium two-layer tray inlay or the economy inlay (see ESD Tray Inlay section below for more information).

Description	Tray Inlay Type*	Tray Capacity	Slide Spacing (in.) (mm)	Width/Length (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
Front-load cart with SmartTrays (20) and tray inlays (20)	Premium	20	1 <sup>3</sup> / <sub>4</sub> 44	28x22 711x559	49 1245	160 72.5	CBNTC20MSOL1
Front-load cart with SmartTrays (30) and tray inlays (30)	Premium	30	1 <sup>3</sup> / <sub>4</sub> 44	28x22 711x559	63 1600	217 98	CBNTC30MSOL1
Side-load cart with SmartTrays (20) and tray inlays (20)	Premium	20	1 <sup>3</sup> / <sub>4</sub> 44	22x30 559x762	49 1245	160 72.5	CBNTCS20MSOL1
Front-load cart with SmartTrays (20) and tray inlays (20)	Economy	20	1 <sup>3</sup> / <sub>4</sub> 44	28x22 711x559	49 1245	160 72.5	CBNTC20MSOL2
Front-load cart with SmartTrays (30) and tray inlays (30)	Economy	30	1 <sup>3</sup> / <sub>4</sub> 44	28x22 711x559	63 1600	217 98	CBNTC30MSOL2
Side-load cart with SmartTrays (20) and tray inlays (20)	Economy	20	1 <sup>3</sup> / <sub>4</sub> 44	22x30 559x762	49 1245	160 72.5	CBNTCS20MSOL2

**Note:** Refer to Tray Inlay and SmartTray section below for technical and electrical property information

**Metrostat SmartTray®**

Description	Color	Maximum Load Rating (lbs.) (kg)	Outside Dimensions Width/Length (in.) (mm)	Inside Dimensions Width/Length (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
ESD molded fiberglass tray	Black	150 68	25 <sup>3</sup> / <sub>4</sub> x17 <sup>3</sup> / <sub>4</sub> 654x451	23 <sup>15</sup> / <sub>16</sub> x15 <sup>15</sup> / <sub>16</sub> 608x405	1 <sup>1</sup> / <sub>8</sub> 28.6	3 1.36	CBNTC-MTRAY

**Note 1:** Trayload rating shown above is based on evenly distributed load in conveyor applications.

**Note 2:** SmartTrays stack efficiently by themselves, as well as with competitive tray designs of the same dimension.

**Note 3:** SmartTrays are compatible with all bottom-loaded tray based cart systems, both Metro and non-Metro.

**Note 4:** SmartTrays can be personalized with a company logo. Minimum quantities and extended lead times apply. Contact your Metro Representative for more information.

**CBNTC-MTRAY Electrical Properties**

Property	Test Method	Value
RTT Resistance	ESD S4.1-1997	1.8x10 <sup>5</sup> -1.4x10 <sup>7</sup> Ohms
RTG Resistance	ESD S4.1-1997	1.4x10 <sup>6</sup> -2.8x10 <sup>6</sup> Ohms
Surface Resistivity	ANSI/EOS/ESD-S11.11-1993	1.0x10 <sup>6</sup> -9.9x10 <sup>9</sup> Ohms/Sq.

**ESD Tray Inlays**

Description	Color	Width/Length (in.) (mm)	Thickness (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
Premium rubber inlay, two layer	Blue (topside)/ Black (bottomside)	24.125x16.1 612x410	0.06 1.5	1.5 0.68	CBTC-INLAY01*
Economy vinyl inlay, single-layer	Blue	24x16.125 610x410	0.125 3	1.5 0.68	CBNTC-INLAY02**

\*CBTC-INLAY01 offers maximum ESD protection, as well as superior resistance to heat, abrasion, and chemicals. The soft dissipative top layer makes it ideal for use in soldering and assembly areas. Easy to clean and maintain.

\*\*CBNTC-INLAY02 provides soft-surface inlay for cushioned PCB transport. Inlay provides static dissipative ESD protection. Not recommended for use in soldering and assembly applications.

**CBTC-INLAY01 Electrical Properties**

Property	Test Method	Value
RTT Resistance	ESD S4.1-1997	4.6x10 <sup>6</sup> -9.0x10 <sup>6</sup> Ohms
RTG Resistance	ESD S4.1-1997	2.3x10 <sup>6</sup> -4.7x10 <sup>6</sup> Ohms

**CBNTC-INLAY02 Electrical Properties**

Property	Test Method	Value
RTT Resistance	ESD S4.1-1997	1.2x10 <sup>7</sup> -9.0x10 <sup>7</sup> Ohms
RTG Resistance	ESD S4.1-1997	1.4x10 <sup>7</sup> -2.0x10 <sup>7</sup> Ohms

**SmartTray Carts**

Description	Tray Capacity No.	Slide Spacing (in.) (mm)	Width/Length (in.) (mm)	Height (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
Front-Load Cart (short)	20	1 <sup>3</sup> / <sub>4</sub> 44	28x22 711x559	49 1245	80 36	CBNTC20M
Front-Load Cart (tall)	30	1 <sup>3</sup> / <sub>4</sub> 44	28x22 711x559	63 1600	97 44	CBNTC30M
Side-Load Cart	20	1 <sup>3</sup> / <sub>4</sub> 44	22x30 559x762	49 1245	80 36	CBNTCS20M

**Note:** CBNTC20M and CBNTCS20M are each load rated at 25 lbs. per level/500lbs. per cart. CBNTC30M is load rated at 20 lbs. per level/600 lbs. per cart.

**Note:** Each cart comes complete with 4 vibration suppression casters (2 brake/2 swivel), a grounding cable, 2 push handles (except CBNTC30M), and 2 stop bars.





ESDCart Covers

### SmartTray® Accessories — {51.35}

#### ESDCart Covers

Conductive on the outside and static dissipative on the inside. Cover material is durable and comes standard with brass zipper front flap and side paperwork pouch.

Cat. No. **CBNTC-CC20**

Fits SmartTray Cart #CBNTC20M

Cat. No. **CBNTC-CC30**

Fits SmartTray Cart #CBNTC30M

Cat. No. **CBNTC-CCS20**

Fits SmartTray Cart #CBNTCS20M



ESDLabel Holder

### ESD Label Holders — {58.15}

Conductive label holders, for use with wire shelves and open MetroMax® Q ESD frames, are available in 3" (76mm) and 37" (940mm) lengths.

Cat. No. **9990PESD**(3" [76mm] long)

Cat. No. **9990P6ESD**(37" [940mm] long)



ESDPaperwork Basket

### ESD Paperwork Basket

Store work order information, inspection record and other accompanying documentation in this convenient, durable and ESD-safe basket. Easy-on, easy-off design. Not recommended for use with ESDCart Covers. Measures 13.375"Lx5"Wx7"H (340x127x178mm).

Cat. No. **H209C**



Color Shelf Markers

### Color Shelf Markers

Designed to color code cart.

Tan — Cat. No. **CSM6-T**



Red — Cat. No. **CSM6-R**



White — Cat. No. **CSM6-W**



Yellow — Cat. No. **CSM6-Y**



Blue — Cat. No. **CSM6-B**



Green — Cat. No. **CSM6-G**



Color Markers measure 6"Lx1.25"H (152x32mm). Order in units of one.

## ESD Covers

Metro's ESD Cart Covers provide an effective method of controlling electrostatic discharge while protecting cart contents from contamination and moisture.

- Unique slip resistant texture.
- Metro's ESD Cart Covers leave no black carbon residue and clean easily with mild detergents and water and are flame retardant and resist the growth of bacteria, fungus, and mildew.
- All ESD Covers include a flap on one side, zipper closures, and a paperwork pouch sized to accommodate 8 1/2"x11" (216x279mm) documents.

ESD Classification: Conductive outer surface and static dissipative inner surface.

Fits Shelf Size (in.) (mm)		Post Height (in.) (mm)		Weight (lbs.) (kg)		Cat. No.
18x36	355x914	63	1600	3.5	1.54	<b>18X36X62ESD</b>
18x48	355x1219	63	1600	4.5	2.04	<b>18X48X62ESD</b>
24x24	610x610	63	1600	3.0	1.36	<b>24X24X62ESD</b>
24x36	610x914	63	1600	4.5	2.04	<b>24X36X62ESD</b>
24x48	610x1219	63	1600	6.0	2.72	<b>24X48X62ESD</b>
24x60	610x1524	63	1600	7.5	3.40	<b>24X60X62ESD</b>



ESD Cart Cover

## Benchside Cart — {16.70}

Metro's Benchside Tote Cart allows workers to position bins, totes, cartons, boxes, or sub-assemblies at an angle conducive to repetitive pick-and-place operations. Each unit comes with a 45° slanted top shelf, standard Super Erecta Shelf at bottom, four casters (two with brakes), conductive plastic split sleeves, and a grounding cable.

- Positions totes, boxes, or sub-assemblies at an angle conducive to efficient pick-and-place operation
- Accommodates miscellaneous totes, cartons, or other items
- Uses minimal amount of available floor space
- Offers easy mobility and holds cart stationary at desired location
- Provides for dissipation of electrostatic charges

ESD Classification: Conductive

Width (in.) (mm)		Length (in.) (mm)		Height (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
18	457	24	610	39	991 (Rear)	39	17.7	<b>EBC313BBR</b>
				30	760 (Front)			



Benchside Cart with Grounding Cable. Metro tote boxes sold separately, See page 228.

## Static Discharge Classifications

All items shown in this catalog with an ESD classification of **conductive** or **static dissipative** conform to the standards and testing procedures as prescribed per: EIA Standard 541, MIL-HDBK-263A and EOS/ESD-S11.11-1993.

These classifications are dependent upon the proper combination of products as specified throughout this catalog. If modifications to a standard unit are required to make it ESD safe, it will be noted in the ESD Classification section.

## Kitting Carts — {51.07}

Metro Kitting Carts provide efficient handling of totes, PCB carriers, trays, or other material handling containers. Totes for use with these carts may be found on page 228, and PCB carriers on page 220.

- Available in single, double, or triple bay configurations.
- Available with 2-brake and 2-swivel casters in your choice of resilient rubber or polyurethane tread.

ESD Classification: Non-Conductive (Units can be made conductive by utilizing GCB16S grounding bracket and ASK16S grounding cable found on page 227).

Width/Length (in.) (mm)	Height (in.) (mm)	Casters	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
<b>Single-Bay</b>				
26x22 <sup>5</sup> / <sub>8</sub>	660x574	68 1727 Resilient	56 25.2	<b>PT1C-5M*</b>
26x22 <sup>5</sup> / <sub>8</sub>	660x574	68 1727 Polyurethane	56 25.2	<b>PT1C-5MP*</b>
<b>Adjustable Single-Bay</b>				
26x20 <sup>5</sup> / <sub>8</sub> to 29 <sup>3</sup> / <sub>8</sub>	523 to 746x660	68 1727 Resilient	54 24.3	<b>APT1C-5M</b>
26x20 <sup>5</sup> / <sub>8</sub> to 29 <sup>3</sup> / <sub>8</sub>	523 to 746x660	68 1727 Polyurethane	54 24.3	<b>APT1C-5MP</b>
<b>Double-Bay</b>				
26x41 <sup>3</sup> / <sub>4</sub>	660x1060	68 1727 Resilient	73 32.8	<b>PT2C-5M**</b>
26x41 <sup>3</sup> / <sub>4</sub>	660x1060	68 1727 Polyurethane	73 32.8	<b>PT2C-5MP**</b>
<b>Triple-Bay</b>				
26x60 <sup>7</sup> / <sub>8</sub>	660x1545	68 1727 Resilient	117 52.6	<b>PT3C-5M***</b>
26x60 <sup>7</sup> / <sub>8</sub>	660x1545	68 1727 Polyurethane	117 52.6	<b>PT3C-5MP***</b>

\*Single-bay carriers are equipped with six S3C single slides (3 sets).  
 \*\*Double-bay carriers are equipped with six S3C single slides (3 sets) and three S4C double slides.  
 \*\*\*Triple-bay carriers are equipped with six S3C single slides (3 sets) and six S4C double slides (3 sets).  
 Also available without slides. Order with catalog numbers PTN1, PTN2, PTN3.

## Extra Slides

Width/Length (in.) (mm)	Description	Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
1 <sup>3</sup> / <sub>16</sub> x24 17x610	Combination Single Slide	1.5 .67	<b>S3C</b>
1 <sup>3</sup> / <sub>16</sub> x24 17x610	Combination Double Slide	1.6 .72	<b>S4C</b>
	End Stops for the S3C Slide		<b>9950Z</b>




APT1C-5MP  
(Shown with optional "ExtraSlides" and Metro Dividers Boxes)



PT2C-5M  
(Shown with optional Metro Divider Boxes)



PT3C-5M  
(Shown with optional Metro Divider Boxes)

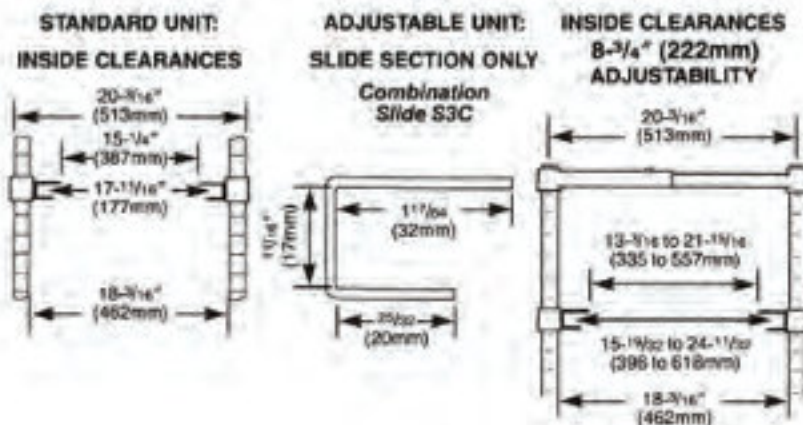


Horizontal Hold (CBH)  
Benchside Model

## Horizontal Hold Carts — Standard-Duty (CBH Style) — {51.03}

Safety and convenience are provided in this durable mobile unit.

- Adjustable panels with horizontal slides feature  $\frac{5}{8}$ " (13mm) spacing for high-density loading.
- Ideal for transporting work-in process and storing large quantities of boards.
- Open stainless steel panels allow for airflow and conductivity, and have slides that accept boards up to  $\frac{1}{8}$ " (3mm) thick.
- Standard units include 2 end panels only. Optional center panel shown below.

ESD Classification: Conductive

### Benchside Models

Maximum Board Size		Capacity Full-Size Boards	Capacity 11 $\frac{1}{2}$ " (292mm) Boards without Center Panel		Capacity 11 $\frac{1}{2}$ " (292mm) Boards with One Center Panel		Width/Length (mm)		Height (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
(in.)	(mm)		(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	
22 $\frac{1}{2}$ x30 $\frac{1}{4}$	571x768	53	106	106	212	212	24x36	610x914	50	1270	81	36.4	CBH534BC
22 $\frac{1}{2}$ x42 $\frac{1}{4}$	571x1073	53	106	106	212	212	24x48	610x1219	50	1270	85	38.2	CBH554BC

### Double-Sided Center Panel for CBH Horizontal Hold Carts

(Includes one stop bar, knobs, and holding brackets).

Width (in.) (mm)		Height (in.) (mm)		Thickness Outside/Inside (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
24	610	41	1041	1 $\frac{1}{4}$ x $\frac{15}{16}$	31.7x20.5	22	9.9	CBHP2

## Horizontal Hold Carts — Heavy-Duty (CBL Style) — {51.04}

High-density cart with  $\frac{3}{8}$ " (8mm) deep slides for positive board capture provide 48 levels for circuit boards and 11 $\frac{1}{16}$ " (18mm) on center spacing for volume loading. Standard units include two end, and one center panel. Height: 68" (1727mm).

- Center panel (included) features slides on both sides.
- Slides accept boards up to 22 $\frac{1}{2}$ " (571mm) long and up to  $\frac{1}{2}$ " (12.7mm) thick.

### ESD Classification: Conductive

Maximum Board Size without Center Panel (in.) (mm)		Capacity 11 $\frac{1}{2}$ " (279mm) Boards without Center Panel	Capacity 11 $\frac{1}{2}$ " (279mm) Boards with Center Panel	Width/Length (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
22 $\frac{1}{2}$ x30 $\frac{1}{4}$	571x768	96	192	24x36	610x914	105	47.2	CBL536BC
22 $\frac{1}{2}$ x42 $\frac{1}{4}$	571x1073	96	192	24x48	610x1219	120	54.1	CBL556BC

### Double-Sided Center Panel for CBL Horizontal Hold Carts

Width/Length (in.) (mm)		Thickness (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
23 $\frac{1}{2}$ x37 $\frac{1}{4}$	596x946	1 $\frac{5}{8}$	40.6	24	10.8	CBLP2

### High-Temperature Kit

Description	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
High-Temperature Kit (Includes 4 high-temperature casters (two with brakes), two "Caution Hot" labels, and 4 metal post caps. Required for temperatures over 160°F (70°C). Kit good to 400°F (205°C). Label Identification Kit (Contains two labels)	13	5.8	HTK-1  IDK-1L



Horizontal Hold (CBL) Model





PCB Hand-Held Carriers — {51.05}

The safe, efficient way to carry delicate printed circuit boards. System features adjustable panels with 5/8" (13mm) slide spacing that accommodate boards up to 1/8" (3mm) thick. Hi-temperature phenolic knobs can be used in applications with up to 400°F[204°C] continuous temperatures.

- Units carry up to 20 full-size boards; optional double-sided center panels increase capacity of carriers.
- Two width sizes available to accommodate additional center panels.
- Stackable design permits up to three carriers of the same size to be stacked vertically, saving floor space.
- Units can be transported and stored on Metro® Kitting Carts found on page 218.



PCB Hand-Held Carrier

ESD Classification: Conductive

Width/Length (in.) (mm)		Height (in.) (mm)	Maximum Board Size (in.) (mm)		Capacity Full-Size Boards	Capacity with 12"x6" (305x150mm) Boards and Optional Center Panels	Approx. Pkd.Wt. Per Unit (lbs.) (kg)		Cat. No.
12 1/2 x 17 1/2	315 x 445	18 3/16	13 x 12	330 x 305	20	40 (1 Center Panel)	10	4.5	CBC11C
12 1/2 x 24 1/4	315 x 615	18 3/16	19 1/4 x 12	490 x 305	20	60 (2 Center Panels)	10 3/4	4.8	CBC13C

Double-Sided Center Panels for PCB Carriers

Width/Length (in.) (mm)		Height (in.) (mm)	Approx. Pkd.Wt. (lbs.) (kg)		Cat. No.
12 1/2 x 7/8	315 x 20.3	15 1/8	6	2.7	CBP2C

PCB Handling Accessories for Metro Containers — {16.65}


Quickly and easily convert your Metro totes (found on pages 228-229) into an effective PCB handling system with the addition Metro PCB Grid Boards.

Metro PCB Grid Boards

Place inside standard Metro totes to provide a pattern of slots where boards can be captured by the bottom edge. Three different size PCB Grid Boards are available in both Bentron conductive and Benstat static dissipative materials to fit the TB91000, TB92000, and TB93000 series footprints.

Fits Series #	Length (in.) (mm)		Width (in.) (mm)		Depth (in.) (mm)	Slot Rows Length/Width (in.) (mm)		Cat. No.*
TB91000	8 7/8	225	6 3/8	165	5/8	13	12x17 305x432	GB91005
TB92000	14 5/16	364	9	229	5/8	13	17x29 432x736	GB92005
TB93000	20	508	17 7/8	454	5/8	13	29x39 736x990	GB93005

\*Add appropriate material suffix (BAS-Benstat or CAS-Bentron). For example, GB91005BAS.



PCB Grid Board



PCB Grid Board in Metro Tote

## End Load and Side Load Wire Tray Carts — {13.42}

Economical solution for storage and transport of trays. End-load models provide a large tray landing area, side-load models are highly space efficient. Choice of 1½" (38mm) spacing (38 pans) or 3" (76mm) (20 pans) spacing. UPS shippable, quick, easy no-tool assembly, rolls easily on 5" (127mm) swivel casters. Durable Super Erecta Brite™ finish.

ESD Classification: Non-Conductive (Units can be made conductive with use of 1 bag of conductive plastic split sleeves per shelf and a grounding cable or conductive casters as found on pages 226 and 227).



Wire Tray Racks

Width/Length (in.) (mm)	Height (in.) (mm)	Slide Spacing (in.) (mm)	Pan Capacity			Approx. Pkd. Wt. (lbs.) (kg)	Description	Cat. No.
			No.	(in.)	Size (mm)			
21¾x27	552x685	69 1752	1½ 38	38	18x26 457x660	61 27.7	End-Load	RE1
21¾x27	552x685	69 1752	3 76	19	18x26 457x660	70 31.8	End-Load	RE3
19½x30	495x762	69 1752	1½ 38	38	18x26 457x660	61 27.6	Side-Load	RS1
19½x30	495x762	69 1752	3 76	19	18x26 457x660	70 31.8	Side-Load	RS3

## Accessories

Description	Model
3½" (90mm) Diameter Rubber Donut Bumper	9992DB
5½" (140mm) Diameter Rubber Donut Bumper	9992N

## Side Load "Knock Down" Carts — {13.72}

Pass-Thru design allows loading and unloading from either side.

ESD Classification: Non-Conductive (Units can be made conductive with use of 1 bag of conductive plastic split sleeves per shelf and a grounding cable or conductive casters as found on pages 226 and 227).

Width/Height/Depth (in.) (mm)	Inside Height (in.) (mm)	Slide Spacing (in.) (mm)	Pan Capacity			Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
			No.	(in.)	Size (mm)		
28¾x64½x18¾	721x1628x476	56½ 1435	3 76	18	18x26 457x660	40 18	RT3318N
28¾x64½x18¾	721x1628x476	56½ 1435	5 127	11	18x26 457x660	38 17.1	RT3511N

**Note:** 5" (127mm) swivel casters, two with brakes, are standard on units listed above.  
Rack packaged in one box and UPS shippable.



Side Load Cart

## End Load "Knock Down" Carts — Single Section — {13.70}

Pass-Thru design allows loading and unloading from either side.

ESD Classification: Non-Conductive (Units can be made conductive with use of 1 bag of conductive plastic split sleeves per shelf and a grounding cable or conductive casters as found on pages 226 and 227).

Width/Height/Depth (in.) (mm)	Inside Height (in.) (mm)	Slide Spacing (in.) (mm)	Pan Capacity			Approx. Pkd. Wt. (lbs.) (kg)	Cat. No.
			No.	(in.)	Size (mm)		
20¾x64½x28	518x1630x711	55⅞ 1417	3 76	18	18x26 457x660	53 23.8	RT183N
					or 36 14x18 355x457		
20¾x64½x28	518x1630x711	55⅞ 1417	5 127	11	18x26 457x660	50 22.5	RT115N
					or 22 14x18 355x457		
20¾x64½x28	518x1630x711	55⅞ 1417	1½ 28	34	18x26 457x660	55 24.7	RT1334N

**Note:** 5" (127mm) swivel casters, two with brakes, are standard on units listed above.  
Rack packaged in one box and UPS shippable.



End Load Cart



## Open Starsys® System

Metro's Open Starsys System is a productivity focused, high-density transport and storage system that adapts to change and provides safe and comfortable access to the material it stores. The optional full-extension shelf offers increased storage capacity compared to standard shelving and carts. Design a unit to fit your needs following the 3 simple steps as provided below.

ESD Classification: Conductive (Stationary and Mobile ESD units only).


### I. Select a Shell

Shells are available in single, double, or triple wide dimensions to accommodate interior shelves, either stationary or full extension. Select your desired shell from the 12 available models below. **Each shell comes complete with top and bottom wire shelves, posts with slotted inserts, footplates (for stationary models) or extended base with 5" (127mm) swivel and brake casters (for mobile models), and necessary hardware. Triple-wide units also include one pair of intermediate posts to create a single wide and double wide bay to accommodate available shelves.**

### Shells

Description	Mobile/ Stationary	High/ Low	Outside Dimensions Depth/Width/Height		Approx. Pkd. Wt.		Cat. No.	Cat. No. ESD*
			(in.)	(mm)	(lbs.)	(kg)		
Single Wide	Stationary	Low	21 <sup>5</sup> / <sub>8</sub> x 21 <sup>15</sup> / <sub>16</sub> x 44 <sup>13</sup> / <sub>16</sub>	702x557x1138	27	12.2	SXRS450SQ	
Single Wide	Stationary	High	21 <sup>5</sup> / <sub>8</sub> x 21 <sup>15</sup> / <sub>16</sub> x 72 <sup>3</sup> / <sub>8</sub>	702x557x1838	38	17.2	SXRS720SQ	
Single Wide	Mobile	Low	27 <sup>7</sup> / <sub>8</sub> x 22 <sup>11</sup> / <sub>16</sub> x 50 <sup>3</sup> / <sub>4</sub>	708x576x1289	65	29.5	SXRS510MQ	SXRS510MQESD
Single Wide	Mobile	High	27 <sup>7</sup> / <sub>8</sub> x 22 <sup>11</sup> / <sub>16</sub> x 71 <sup>13</sup> / <sub>16</sub>	708x576x1824	106	48.0	SXRS720MQ	SXRS720MQESD
Double Wide	Stationary	Low	21 <sup>5</sup> / <sub>8</sub> x 41 <sup>3</sup> / <sub>4</sub> x 44 <sup>13</sup> / <sub>16</sub>	702x1060x1138	56	25.4	SXRD450SQ	
Double Wide	Stationary	High	21 <sup>5</sup> / <sub>8</sub> x 41 <sup>3</sup> / <sub>4</sub> x 72 <sup>3</sup> / <sub>8</sub>	702x1060x1838	66	29.4	SXRD720SQ	
Double Wide	Mobile	Low	27 <sup>7</sup> / <sub>8</sub> x 42 <sup>1</sup> / <sub>2</sub> x 50 <sup>3</sup> / <sub>4</sub>	708x1080x1289	105	46.7	SXRD510MQ	SXRD510MQESD
Double Wide	Mobile	High	27 <sup>7</sup> / <sub>8</sub> x 42 <sup>1</sup> / <sub>2</sub> x 71 <sup>13</sup> / <sub>16</sub>	708x1080x1824	118	52.5	SXRD720MQ	SXRD720MQESD
Triple Wide	Stationary	Low	21 <sup>5</sup> / <sub>8</sub> x 61 <sup>9</sup> / <sub>16</sub> x 44 <sup>13</sup> / <sub>16</sub>	702x1570x1138	55	24.5	SXRT450SQ	
Triple Wide	Stationary	High	21 <sup>5</sup> / <sub>8</sub> x 61 <sup>9</sup> / <sub>16</sub> x 72 <sup>3</sup> / <sub>8</sub>	702x1570x1838	75	34.0	SXRT720SQ	
Triple Wide	Mobile	Low	27 <sup>7</sup> / <sub>8</sub> x 62 <sup>5</sup> / <sub>16</sub> x 50 <sup>3</sup> / <sub>4</sub>	708x1583x1289	140	62.3	SXRT510MQ	SXRT510MQESD
Triple Wide	Mobile	High	27 <sup>7</sup> / <sub>8</sub> x 62 <sup>5</sup> / <sub>16</sub> x 71 <sup>13</sup> / <sub>16</sub>	708x1583x1824	150	68.0	SXRT720MQ	SXRT720MQESD

\*Mobile ESD Units include conductive aluminum shroud and grounding cable. All standard stationary units are ESD safe. All units shown above are shipped knocked-down. Contact your local Metro representative if factory assembly is required.

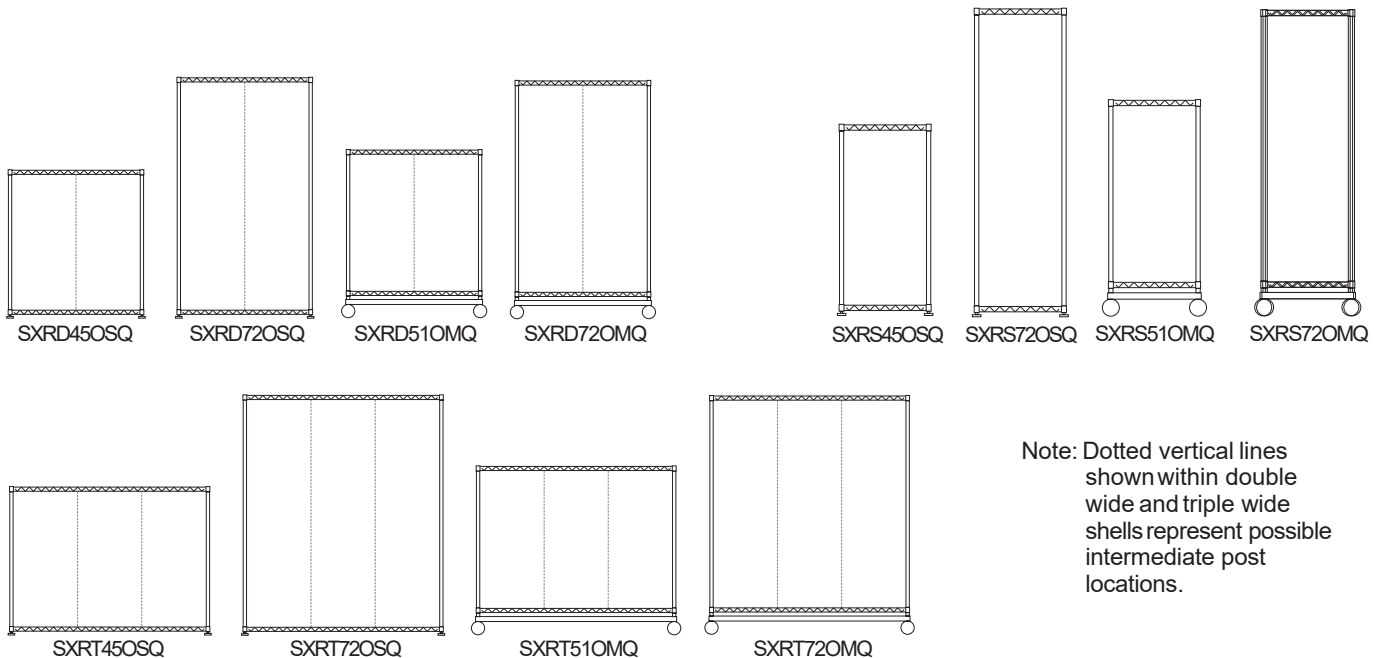


Note: Dotted vertical lines shown within double wide and triple wide shells represent possible intermediate post locations.

For Starsys pricing information, please contact your local Metro representative.

## II. Select Desired Configuration

Double and triple wide units (SXRDa and SXRT models) may be internally divided into vertical bays to accommodate single or double wide shelves as desired. Two intermediate posts are required between each bay and come with appropriate mounting hardware. Select required intermediate posts as specified below:

- A — One intermediate post required to enclose back of double wide unit if only double wide shelves are being used (2 back panels required).
- B — Two intermediate posts required to divide double wide unit into 2 vertical bays that accommodate single wide shelves.
- C — Two intermediate posts required as standard components with all triple wide units to segment into 1-single wide and 1-double wide vertical bay that accommodates single and double wide shelves as desired.
- D — One additional intermediate post is required to enclose back of triple wide unit with back panels (3 back panels required).
- E — Two additional intermediate posts required on triple wide units to segment into 3-single wide vertical bays that accommodate single wide shelves as desired (3 back panels required if rear enclosure desired).

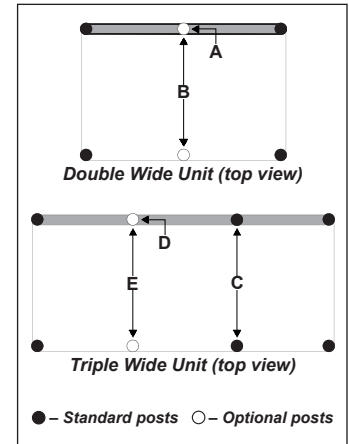

## Intermediate Posts

Description	Fits Shells	Outside Dimensions Length/Diameter		Approx. Pkd.Wt.		Cat. No.
		(in.)	(mm)	(lbs.)	(kg)	
Intermediate Post – Low Units	SXRS45/51, SXRD45/51, SXRT45/51	37 <sup>1</sup> / <sub>8</sub> x 1 <sup>5</sup> / <sub>8</sub>	943 x 41.3	3	1.3	SXR37IP
Intermediate Post – High Mobile Units	SXRS72, SXRD72, SXRT72 (Mobile)	58 x 1 <sup>5</sup> / <sub>8</sub>	1473 x 41.3	3 <sup>1</sup> / <sub>4</sub>	1.4	SXR58IP
Intermediate Post – High Stationary Units	SXRS72, SXRD72, SXRT72 (Stationary)	64 <sup>1</sup> / <sub>4</sub> x 1 <sup>5</sup> / <sub>8</sub>	1632 x 41.3	3 <sup>1</sup> / <sub>2</sub>	1.6	SXR65IP

## III. Select Desired Shelves

Shelves are available in stationary or full extension styles that can be installed at any location on a post within a shell at 1" (25.4mm) increments. Stationary shelves include necessary mounting clips and each full-extension shelf includes one pair of shelf glides with a right-hand lock button to prevent shelf movement while mobile. Stationary and full-extension shelves can be utilized together in the same shell.\*

## Shelving

Description	Single Wide/ Double Wide	Weight Capacity†		Outside Dimension Depth/Width/Height		Approx. Pkd.Wt.		Cat. No.
		(lbs.)	(kg)	(in.)	(mm)	(lbs.)	(kg)	
Stationary Shelf	Single	150	68	21 <sup>9</sup> / <sub>16</sub> x 19 <sup>3</sup> / <sub>4</sub> x 1 <sup>15</sup> / <sub>16</sub>	548 x 502 x 33	10	4.5	SXRSWQ-KD
Stationary Shelf	Double	300	136	21 <sup>9</sup> / <sub>16</sub> x 39 <sup>1</sup> / <sub>2</sub> x 1 <sup>15</sup> / <sub>16</sub>	548 x 1003 x 33	20	9.0	SXRDWQ-KD
Full Extension Shelf	Single	60	27.2	21 <sup>9</sup> / <sub>16</sub> x 16 <sup>1</sup> / <sub>2</sub> x 1 <sup>1</sup> / <sub>2</sub>	548 x 419 x 38	12	5.4	SXRSWAR-KD
Full Extension Shelf	Double	125	56.6	21 <sup>9</sup> / <sub>16</sub> x 36 <sup>3</sup> / <sub>8</sub> x 1 <sup>15</sup> / <sub>16</sub>	548 x 924 x 33	22	10.0	SXRDWAR-KD

†Weight capacities shown are based on uniformly distributed loads.

\*Full-extension shelves can be positioned within a unit up to, and including, a maximum height of 48" (1219mm) above the floor. Only one shelf of the equipment opened at any one time; excluding transport, where all shelves should be closed and the locking mechanism engaged.

For Starsys pricing information, please contact your local Metro representative.



## IV. Select Accessories

Select desired accessories as shown below.

### Enclosures

Choose from available top, side, or back enclosures to protect unit contents. **Top enclosure kits include top shelf inlay and fascia required to dress off all 4 shelf edges.**

Description	High/Low	Fits	Outside Dimensions Depth/Width/Height		Approx. Pkd. Wt.		Cat. No.
			(in.)	(mm)	(lbs.)	(kg)	
Pair Side Panels	Low	All Widths	1x19 <sup>11</sup> / <sub>16</sub> x36 <sup>1</sup> / <sub>2</sub>	25.4x500x927	11 <sup>1</sup> / <sub>2</sub>	5.2	<b>SXR36SDPNL</b>
Pair Side Panels	High Mobile	All Widths	1x19 <sup>11</sup> / <sub>16</sub> x58	25.4x500x1473	17 <sup>1</sup> / <sub>2</sub>	7.9	<b>SXR58SDPNL</b>
Pair Side Panels	High Stationary	All Widths	1x19 <sup>11</sup> / <sub>16</sub> x64	25.4x500x1651	19 <sup>1</sup> / <sub>2</sub>	8.7	<b>SXR64SDPNL</b>
Back Panel	Low	All Widths*	1 <sup>3</sup> / <sub>4</sub> x19 <sup>11</sup> / <sub>16</sub> x36 <sup>1</sup> / <sub>2</sub>	44.5x500x927	6	2.7	<b>SXR36BKPNL</b>
Back Panel	High Mobile	All Widths*	1 <sup>3</sup> / <sub>4</sub> x19 <sup>11</sup> / <sub>16</sub> x58	44.5x500x1473	10	4.5	<b>SXR58BKPNL</b>
Back Panel	High Stationary	All Widths*	1 <sup>3</sup> / <sub>4</sub> x19 <sup>11</sup> / <sub>16</sub> x64	44.5x500x1625	11 <sup>1</sup> / <sub>2</sub>	5.1	<b>SXR64BKPNL</b>
Top Enclosure Kit	Low & High	Single Wide	21 <sup>7</sup> / <sub>8</sub> x22 <sup>1</sup> / <sub>8</sub> x1 <sup>1</sup> / <sub>8</sub>	556x562x3.2	5 <sup>1</sup> / <sub>2</sub>	2.5	<b>SXRSTK</b>
Top Enclosure Kit	Low & High	Double Wide	21 <sup>7</sup> / <sub>8</sub> x41 <sup>7</sup> / <sub>8</sub> x1 <sup>1</sup> / <sub>8</sub>	556x1064x3.2	10	4.5	<b>SXRDTEK</b>
Top Enclosure Kit	Low & High	Triple Wide	21 <sup>7</sup> / <sub>8</sub> x61 <sup>3</sup> / <sub>4</sub> x1 <sup>1</sup> / <sub>8</sub>	556x1568x3.2	13 <sup>1</sup> / <sub>2</sub>	6.0	<b>SXRTTEK</b>

**\*NOTE:** Number of panels needed enclose back of units: Single wide = 1; Double wide = 2; Triple wide = 3.  
See Section II for number of intermediate posts required.



Enclosures

### Post Filler Kits

Used to fill the unused slots of Starsys posts. Sold 4 to a pack, these poly strips are available in sizes to fit both end or intermediate posts.

Description	Fits Posts	Length		Approx. Pkd. Wt.		Cat. No.
		(in.)	(mm)	(lbs.)	(kg)	
Filler Strip Kit	Low Intermediate	37 <sup>1</sup> / <sub>8</sub>	943	<sup>1</sup> / <sub>2</sub>	0.2	<b>SXR37FSK-4</b>
Filler Strip Kit	Low End	43 <sup>1</sup> / <sub>2</sub>	1105	<sup>3</sup> / <sub>4</sub>	0.3	<b>SXR44FSK-4</b>
Filler Strip Kit	High Intermediate	58	1473	<sup>3</sup> / <sub>4</sub>	0.3	<b>SXR58FSK-4</b>
Filler Strip Kit	High Mobile End	64 <sup>1</sup> / <sub>2</sub>	1638	1	0.4	<b>SXR65FSK-4</b>
Filler Strip Kit	High Stationary End	71	1803	1	0.4	<b>SXR71FSK-4</b>

### Miscellaneous Accessories

Use optional accessories below to customize a unit to desired configuration.

Description	Fits	Outside Dimensions Length/Width/Height		Approx. Pkd. Wt.		Cat. No.
		(in.)	(mm)	(lbs.)	(kg)	
Label Holder	SXRSWQ-KD, SXRSWAR-KD	16 <sup>1</sup> / <sub>2</sub> Lx1 <sup>1</sup> / <sub>2</sub> H	419Lx38H	<sup>1</sup> / <sub>4</sub>	0.1	<b>9990P7</b>
Label Holder	SXRDWQ-KD, SXRDWAR-KD	36 <sup>3</sup> / <sub>8</sub> Lx1 <sup>1</sup> / <sub>2</sub> H	924Lx38H	<sup>1</sup> / <sub>4</sub>	0.1	<b>9990P8</b>
Handle	All Units	19x4x4	483x102x102	5 <sup>1</sup> / <sub>4</sub>	2.3	<b>SXREHAN-KD</b>
Ledge	All Internal Shelves	15 <sup>1</sup> / <sub>4</sub> x3 <sup>3</sup> / <sub>4</sub> x4 <sup>1</sup> / <sub>8</sub>	387x19x105	2	0.9	<b>SXRSLDG*</b>
Divider	All Internal Shelves	21x5 <sup>5</sup> / <sub>8</sub> x3	533x17x76	2 <sup>1</sup> / <sub>2</sub>	1.1	<b>SXRSLFDIV</b>

**\*NOTE:** Ledge can be used as both a back and a side ledge. For use as a back ledge, order same number of ledges as width of shelf (e.g., single wide = 1, double wide = 2).



Label Holder



Handle



Divider



Ledge

For Starsys pricing information, please contact your local Metro representative.



Reel Shelving

**SMT Reel Shelving (Super Erecta) — {51.09}**

Metro's Super Erecta-based SMT Component Reel Shelving offers an efficient method of storage and transport for standard size component reels. These Super Erecta Brite plated shelves can be mixed and matched with standard Super Erecta shelving, posts, and casters to create a reel handling and storage system to address the exacting needs of PCB manufacturers.

ESD Classification: Conductive with the use of conductive plastic split sleeves which are included with each shelf (see page 227), and 5MESD conductive casters for mobile applications (found on page 226).

Width (in.) (mm)	Length (in.) (mm)	Height (in.) (mm)	Handles Reel Sizes (in.) (mm)	Reel* Capacity	Compartment Opening (I.D.) (in.) (mm)	Approx. Pkd.Wt. (lbs.) (kg)	Cat. No.
18 457	36 914	3.75 95	7 178	78	.625 27	11.0 5	<b>R1836BR-7</b>
18 457	36 914	4.25 108	10 254	15	2 50	7.5 3.4	<b>R1836BR-13</b>

**Note 1:** Capacity given is per shelf.  
**Note 2:** Capacity shown assumes standard reels (per EIS standards) are used. As the widths of these reels vary, capacity may increase if multiple reels can be fit into single compartments. Refer to Compartment Opening column above to determine actual capacity.

Seepage 226 for Conductive Casters.



SMT Stencil Frame Rack

**SMT Stencil Frame Rack  
(Super Erecta) — {10.01a} {10.10a}**

Select Super Erecta posts, shelves and dividers to create a compartmentalized Stencil Storage unit to fit your requirements.  
 Seepage 42 for shelves and posts and page 55 for dividers.

Available in durable chrome plating or Type 304 Stainless Steel.  
 ESD Classification: Conductive with the use of conductive split sleeves (see page 227) and 5MESD conductive casters for mobile applications (see page 226).



5M



5MDA



5MFA



5MC



5MESD

### Stem Casters — {11.20} {9.05}

Use with Super Erecta®/Super Adjustable Super Erecta® posts (shown below) to meet your special needs. Each caster comes with a donut bumper at no extra charge. 5MDA series provides extra shock absorption while the 5MP series is long-wearing and resists abrasion. 5M series is the most economical caster offered. 5MFA series are designed to dampen vibration and offer superior rollability and maneuverability.

ESD Classification: Non-Conductive

Wheel Diameter (in.)	Wheel Diameter (mm)	Face (in.)	Face (mm)	Load Rating (lbs.)	Load Rating (kg)	Type	Wheel/Tread Material	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Super Erecta
5	127	1 1/4	32	200	90	Stem/Swivel	Resilient	2 1/2	1.1	<b>5M</b>
5	127	1 1/4	32	200	90	Stem/Brake	Resilient	2 3/4	1.2	<b>5MB</b>
5	127	1 1/4	32	250	111	Stem/Swivel	High Modulus Donut	2 1/2	1.1	<b>5MDA</b>
5	127	1 1/4	32	250	111	Stem/Brake	High Modulus Donut	2 3/8	1.17	<b>5MDBA</b>
5	127	1 1/4	32	300	135	Stem/Swivel	High Modulus	2 1/2	1.1	<b>5MFA</b>
5	127	1 1/4	32	300	135	Stem/Brake	High Modulus	2 3/4	1.2	<b>5MFBA</b>
5	127	1 1/4	32	300	135	Stem/Swivel	Polyurethane	2 1/8	.94	<b>5MP</b>
5	127	1 1/4	32	300	135	Stem/Brake	Polyurethane	2 1/4	1	<b>5MPB</b>

Note: Load Height for all casters — 63/32" ± 1/16" (155 ± 1.5mm).

### Super Erecta Conductive Stem Casters — {11.21}

When used in conjunction with aluminum split sleeves and a grounding cable, Metro's conductive casters ensure mobile units are properly grounded to ESD floor surfaces. New 5MESD series are non-carbon loaded and will not mark expensive ESD floors.

ESD Classification: Conductive

Wheel Diameter (in.)	Wheel Diameter (mm)	Face (in.)	Face (mm)	Load Rating (lbs.)	Load Rating (kg)	Type	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No.
5	127	1 1/4	32	175	79	Stem/Swivel	2 1/2	1.1	<b>5MC</b>
5	127	1 1/4	32	175	79	Stem/Brake	2 3/4	1.2	<b>5MBC</b>
5	127	1 1/4	32	200	91	Stem/Swivel	2 1/2	1.1	<b>5MESD</b>
5	127	1 1/4	32	200	91	Stem/Brake	2 3/4	1.2	<b>5MBESD</b>

Note 1: Load Height for all casters — 63/32" ± 1/16" (155 ± 1.5mm).

Note 2: Brakes are foot-operated for 5MC series.

Note 3: Brakes are toe-operated for 5MESD series.

### Super Erecta®/Super Adjustable SiteSelect® Posts for Stem Casters — {10.01}

Provided without leveling bolt assembly to accept stem casters.

Height (in.)	Height (mm)	Approx. Pkd. Wt. (lbs.)	Approx. Pkd. Wt. (kg)	Cat. No. Plated	Cat. No. Stainless
33 7/8	861	2	0.9	<b>33UP</b>	<b>33UPS</b>
54	1370	3	1.4	<b>54UP</b>	<b>54UPS</b>
62	1575	3 1/2	1.6	<b>63UP</b>	<b>63UPS</b>
74	1880	4	1.8	<b>74UP</b>	<b>74UPS</b>
86	2185	5	2.3	<b>86UP</b>	<b>86UPS</b>

SiteSelect® Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are multi-grooved every 8" (203mm) for easy shelf location.

## ESD Label Holders — {51.35}

Conductive label holders, for use with Super Erecta® wire shelves and open MetroMax Q ESD frames, are available in 3" (76mm) and 37" (940mm) lengths.

Cat. No. **9990PESD** (3" [76mm] long)

Cat. No. **9990P6ESD** (37" [940mm] long)



9990PESD

## Super Erecta® Conductive Plastic Split Sleeves

Required for Super Erecta Shelving ESD applications. Four sets of sleeves to a bag.

Cat. No. **9985-ESD**

## Super Adjustable Super Erecta® ESD Kits (not shown)

For ESD protected environments. Kit includes conductive releases (4), wedges (4), and sleeves (4).

Cat. No. **AESDA2-KIT**

Super Adjustable Super Erecta® Conductive Sleeves. Set of 4.

Cat. No. **AESDA2-4**



9985-ESD

## Aluminum Split Sleeves — {10.06}

Required for Super Erecta Shelving over-the-road applications and high temperature situations (+120°F).

Description	Cat. No.
Aluminum Split Sleeves with Zinc Rings	<b>9986Z</b>
Aluminum Split Sleeves with Stainless Rings	<b>9986S</b>

## Conductive Cart Covers

Recommended for protection and cleanliness of ESD sensitive materials on Metro Super Erecta carts. For available sizes and model numbers see pages 216 and 217.



9986Z

## Grounding Cable and Bracket (not shown)

Allows grounding of Metro units with a tubular frame at the bottom level (e.g. Metro Kitting Carts and Benchside PCB Truck models).

Cat. No. **GCB16S**

## Grounding Cable

Provides an effective method of electrostatic discharge for any Metro Super Erecta unit (stationary or mobile) when used in conjunction with aluminum split sleeves or ESD kit and conductive casters (page 226). Metro's Grounding Cables ensure a proper path to ground when used with ESD flooring.

Cat. No. **ASKCR** (screws onto wire snake frame)

Cat. No. **ASK16S** (spring-loaded clamp attachment)



ASKCR

## Grounding Cable and Universal Bracket (not shown)

Universal bracket fits wire and solid shelves, as well as open-wire frames.

Cat. No. **GCB16SA**



ASK16S





### Divider Totes — {16.65}

The Metro Tote Box Line offers safe and efficient storage of items in bulk, or in compartmentalized fashion with the use of optional dividers and covers.

- Can be stored and transported on a variety of standard Metro Products (e.g. Metro Kitting Carts found on page 218).
- Manufactured from polypropylene baseresins.

- Available in natural gray (NAT), Benstat™ blue static dissipate (BAS), or Bentrion™ black conductive (CAS) compounds.
- Injection molded for longer life and more uniform wall thickness.
- For Dip Tube storage applications, use TB95050 series totes.

### Totes (sold in carton quantities as shown)

Cu. Cap (Cu. Ft.)	Inside Dimensions					Outside Dimensions					Weight (lb.) (kg)	Carton Qty.*	Est. Carton Wt. (lbs.)	Cat. No. Natural Polypropylene	Cat. No. Benstat	Cat. No. Bentrion			
	Length (in.) (mm)	Width (in.) (mm)	Stack Depth (in.) (mm)	Length (in.) (mm)	Width (in.) (mm)	Height (in.) (mm)													
.10	9 <sup>3</sup> / <sub>16</sub>	233	6 <sup>9</sup> / <sub>16</sub>	167	3	176	10 <sup>7</sup> / <sub>8</sub>	276	8 <sup>1</sup> / <sub>4</sub>	210	3 <sup>1</sup> / <sub>2</sub>	89	37	16.8	48	37	TB91035NAT	TB91035BAS	TB91035CAS
.19	9 <sup>3</sup> / <sub>16</sub>	233	6 <sup>9</sup> / <sub>16</sub>	167	5 <sup>1</sup> / <sub>2</sub>	138	10 <sup>7</sup> / <sub>8</sub>	276	8 <sup>1</sup> / <sub>4</sub>	210	6	152	34	15.4	24	34	TB91060NAT	TB91060BAS	TB91060CAS
.24	14 <sup>7</sup> / <sub>8</sub>	378	9 <sup>3</sup> / <sub>4</sub>	235	3	76	16 <sup>1</sup> / <sub>2</sub>	419	10 <sup>7</sup> / <sub>8</sub>	276	3 <sup>1</sup> / <sub>2</sub>	89	36	15.9	12	30	TB92035NAT	TB92035BAS	TB92035CAS
.59	15	381	15	381	4 <sup>1</sup> / <sub>2</sub>	114	16 <sup>1</sup> / <sub>2</sub>	419	10 <sup>7</sup> / <sub>8</sub>	276	6	152	28	12.7	12	28	TB92050NAT	TB92050BAS	TB92050CAS
.44	14 <sup>7</sup> / <sub>8</sub>	378	9 <sup>3</sup> / <sub>4</sub>	235	5 <sup>1</sup> / <sub>2</sub>	138	16 <sup>1</sup> / <sub>2</sub>	419	10 <sup>7</sup> / <sub>8</sub>	276	6	152	28	12.7	12	28	TB92060NAT	TB92060BAS	TB92060CAS
.60	14 <sup>7</sup> / <sub>8</sub>	378	9 <sup>3</sup> / <sub>4</sub>	235	7 <sup>1</sup> / <sub>2</sub>	190	16 <sup>1</sup> / <sub>2</sub>	419	10 <sup>7</sup> / <sub>8</sub>	276	8	203	25	11.3	6	19	TB92080NAT	TB92080BAS	TB92080CAS
.44	20 <sup>5</sup> / <sub>8</sub>	524	15 <sup>5</sup> / <sub>8</sub>	397	2 <sup>1</sup> / <sub>2</sub>	63	22 <sup>1</sup> / <sub>2</sub>	571	17 <sup>1</sup> / <sub>2</sub>	445	3	76	36	16.3	12	31	TB93030NAT	TB93030BAS	TB93030CAS
.79	20 <sup>5</sup> / <sub>8</sub>	524	15 <sup>5</sup> / <sub>8</sub>	397	4 <sup>1</sup> / <sub>2</sub>	114	22 <sup>1</sup> / <sub>2</sub>	571	17 <sup>1</sup> / <sub>2</sub>	445	6	127	32	14.5	6	24	TB93050NAT	TB93050BAS	TB93050CAS
.97	20 <sup>5</sup> / <sub>8</sub>	524	15 <sup>5</sup> / <sub>8</sub>	397	5 <sup>1</sup> / <sub>2</sub>	138	22 <sup>1</sup> / <sub>2</sub>	571	17 <sup>1</sup> / <sub>2</sub>	445	6	152	24	10.9	6	24	TB93060NAT	TB93060BAS	TB93060CAS
1.32	20 <sup>5</sup> / <sub>8</sub>	524	15 <sup>5</sup> / <sub>8</sub>	397	7 <sup>1</sup> / <sub>2</sub>	190	22 <sup>1</sup> / <sub>2</sub>	571	17 <sup>1</sup> / <sub>2</sub>	445	8	203	21	9.5	4	21	TB93080NAT	TB93080BAS	TB93080CAS
2.03	20 <sup>5</sup> / <sub>8</sub>	524	15 <sup>5</sup> / <sub>8</sub>	397	11 <sup>1</sup> / <sub>2</sub>	292	22 <sup>1</sup> / <sub>2</sub>	571	17 <sup>1</sup> / <sub>2</sub>	445	12	305	20	9	3	20	TB93120NAT	TB93120BAS	TB93120CAS
.26	24 <sup>3</sup> / <sub>8</sub>	632	4 <sup>3</sup> / <sub>4</sub>	121	4 <sup>1</sup> / <sub>2</sub>	114	26 <sup>1</sup> / <sub>4</sub>	667	6 <sup>1</sup> / <sub>4</sub>	159	5	127	47	21.3	24	49	TB95050NAT	TB95050BAS	TB95050CAS

\*Items must be purchased in carton quantities to avoid a broken lot charge.

Pricing based on quantity ordered. Please consult your Metro representative.

### Covers\*\*

Type	Carton Qty.*	Est. Carton Wt. (lbs.)	Fits Totes Series	Cat. No. Clear PETG	Cat. No. Natural Polypropylene	Cat. No. Benstat	Cat. No. Bentrion	Fits Totes Series	Cat. No. Clear PETG	Cat. No. Natural Polypropylene	Cat. No. Benstat	Cat. No. Bentrion
Snap-on	96	48	TB91000	—	CO91000NAT	CO91000BAS	CO91000CAS	TB93000	—	CO93000NAT	CO93000BAS	CO93000CAS
Insert	96	30	TB91000	CI91000CLR	CI91000NAT	CI91000BAS	CI91000CAS	TB93000	CI93000CLR	CI93000NAT	CI93000BAS	CI93000CAS
Snap-on	48	23	TB92000	—	CO92000NAT	CO92000BAS	CO92000CAS					
Insert	48	34	TB92000	CI92000CLR	CI92000NAT	CI92000BAS	CI92000CAS	TB95050	—	CI95050NAT	CI95050BAS	CI95050CAS
Snap-on	24	18	TB92050	—	CO92050NAT	CO92050BAS	CO92050CAS					
Insert	24	18	TB92050	—	CI92050NAT	CI92050BAS	CI92050CAS					

\*Items must be purchased in carton quantities to avoid a broken lot charge.

Pricing based on quantity ordered. Please consult your Metro representative.

Note: If totes are to be used with Kitting Carts on page 218, the insert cover must be used.

\*\*When boxes with covers are lip loaded, box weight capacity must not exceed 25 lbs. (11.3kg).

### Dividers

FitsTotes	Type	Height (in.)	Height (mm)	Carton Qty.*	Est. Carton Wt. (lbs.)	Cat. No. Natural Polypropylene	Cat. No. Benstat	Cat. No. Bentrion	Type	Carton Qty.*	Est. Carton Wt. (lbs.)	Cat. No. Natural Polypropylene	Cat. No. Benstat	Cat. No. Bentrion
TB91035	Long	3	76	96	12	DL91035NAT	DL91035BAS	DL91035CAS	Short	96	9	DS91035NAT	DS91035BAS	DS91035CAS
TB91060	Long	5 1/2	140	96	24	DL91060NAT	DL91060BAS	DL91060CAS	Short	96	17	DS91060NAT	DS91060BAS	DS91060CAS
TB92035	Long	3	76	96	21	DL92035NAT	DL92035BAS	DL92035CAS	Short	96	13	DS92035NAT	DS92035BAS	DS92035CAS
TB92060	Long	5 1/2	140	96	39	DL92060NAT	DL92060BAS	DL92060CAS	Short	96	33	DS92060NAT	DS92060BAS	DS92060CAS
TB92080	Long	7 1/2	191	96	54	DL92080NAT	DL92080BAS	DL92080CAS	Short	96	24	DS92080NAT	DS92080BAS	DS92080CAS
TB93030	Long	2 1/2	64	96	25	DL93030NAT	DL93030BAS	DL93030CAS	Short	96	34	DS93030NAT	DS93030BAS	DS93030CAS
TB93050	Long	4 1/2	114	96	44	DL93050NAT	DL93050BAS	DL93050CAS	Short	96	18	DS93050NAT	DS93050BAS	DS93050CAS
TB93060	Long	5 1/2	140	96	53	DL93060NAT	DL93060BAS	DL93060CAS	Short	96	32	DS93060NAT	DS93060BAS	DS93060CAS
TB93080	Long	7 1/2	191	96	72	DL93080NAT	DL93080BAS	DL93080CAS	Short	96	40	DS93080NAT	DS93080BAS	DS93080CAS
TB92050		4 1/2	114						Long/Short	96	55	DS92050NAT	DS92050BAS	DS92050CAS
TB95050		4 1/2	114						Short	96	55	DS95050NAT	DS95050BAS	DS95050CAS

\*Items must be purchased in carton quantities to avoid a broken lot charge.

Pricing based on quantity ordered. Please consult your Metro representative.



Tote Box with Snap-on Cover



Tote Box with Dividers

## Card Holders — {16.65}

Includes snapsto fit all Metro totes. ESDBenstat also available.

Material	Holds Card Size (in.) (mm)		Carton Qty.*	Est. Carton Wt. (lbs.)	Cat. No.
Benstat	5x8	127x203	96	10	OP2501BAS
Benstat	3x5	76x129	96	10	OP2535BAS
Polypropylene	5x8	127x203	96	10	OP2501CLR
Polypropylene	3x5	76x129	96	10	OP2535CLR

\*Items must be purchased in carton quantities to avoid a broken lot charge.  
Pricing based on quantity ordered. Please consult your Metro representative.



Tote Boxes  
(shown with Cardholder)

## Stacking Bins — {16.65}

Metro stacking bins are injection molded from polypropylene baseresins in natural gray (NAT), static dissipative blue Benstat (BAS), or black conductive Bentron (CAS) compounds. All sizes have an open hopper front for easy access to contents and a slot on the back for use on bin holder bars.

Length (in.) (mm)	Width (in.) (mm)	Height (in.) (mm)	Carton Qty.*	Est. Carton Wt. (lbs.)	Cat. No. Natural Polypropylene	Cat. No. Benstat	Cat. No. Bentron
7 <sup>3</sup> / <sub>8</sub> 187	4 <sup>1</sup> / <sub>8</sub> 105	3 76	48	36	SB90743NAT	SB90743BAS	SB90743CAS
10 <sup>7</sup> / <sub>8</sub> 276	5 <sup>1</sup> / <sub>2</sub> 140	5 127	24	25	SB91055NAT	SB91055BAS	SB91055CAS
14 <sup>3</sup> / <sub>4</sub> 375	8 <sup>1</sup> / <sub>4</sub> 210	7 179	12	18	SB91587NAT	SB91587BAS	SB91587CAS
14 <sup>3</sup> / <sub>4</sub> 375	16 <sup>1</sup> / <sub>2</sub> 419	7 179	6	18	SB91516NAT	SB91516BAS	SB91516CAS
8 203	3 <sup>1</sup> / <sub>2</sub> 89	4 <sup>1</sup> / <sub>8</sub> 105	48	39	SB90835NAT	SB90835BAS	SB90835CAS

\*Items must be purchased in carton quantities to avoid a broken lot charge.  
Pricing based on quantity ordered. Please consult your Metro representative.

## Dividers for Bins

Type	Fits	Carton Qty.*	Est. Carton Wt. (lbs.)	Cat. No. Natural Polypropylene	Cat. No. Benstat	Cat. No. Bentron
Long	SB91516	6	3	DL91516NAT	DL91516BAS	DL91516CAS
Long	SB90835	48	24	DI90835NAT	DI90835BAS	DI90835CAS

\*Items must be purchased in carton quantities to avoid a broken lot charge.  
Pricing based on quantity ordered. Please consult your Metro representative.



Stacking Bins

# Good Clean Design

## Class Act.

*"Independent Testing confirms Metro's Super Erecta® wire shelving/carts, solid louvered shelving/carts and Clean Tables (Perf) are appropriate for use in FED. Std. 209E Class 1 (ISO14644: ISO 3) environments."*

Test results available upon request.



MW700 Series shown

## Cleanroom Carts

- A durable, dependable transport solution that's easy to maneuver.
- Highly rigid Super Erecta® construction lets you easily adjust shelves at 1" (25mm) increments.
- Each cart consists of 2 handles, indicated number of shelves of material listed, and casters. 18" (457mm) wide carts have 4" (102mm) light-duty casters and are 38" (965mm) high. 21" (530mm) and 24" (610mm) wide carts have 5" (127mm) light-duty casters providing 375 lbs. (171kg) of load capacity and are 39" (990mm) high.
- Shipped knocked-down.

For more information, see page 128. For heavier-duty carts, see SP Series Carts on page 129.



## Super Erecta® Stainless Open-Wire Shelving

- The original wire storage and handling system has become the standard in the cleanroom industry.
- Manufactured from electro-polished, Type 304 stainless steel.
- Super Erecta® open-wire design facilitates maximum airflow.

Refer to pages 36-63 for more information.



## Super Erecta® Shelf All-Stainless Solid Shelving

- Solid shelving is available in four widths and six lengths.
- All-stainless, 18-gauge steel construction with 1/8" (3mm) ship's edge detail helps contain spills.
- All-stainless design, including stainless cast corners, can be used in cart wash and autoclave environments. Refer to autoclave guidelines on page 175.
- New accessories include high-temperature autoclave casters and autoclave cart covers.



All stainless solid shelf with stainless corners

Refer to page 173 for more information.

## Class Act.

"Independent Testing confirms Metro's Super Erecta® wire shelving/carts, solid louvered shelving/carts and Clean Tables (Perf) are appropriate for use in FED. Std. 209E Class 1 (ISO14644: ISO 3) environments."

Test results available upon request.



Perf Top Table

## Perf Top Clean Tables —{58.01}

Type 304 stainless steel, HD Super™ posts and proven SuperErecta construction throughout.

- Units are shipped knocked down to minimize freight charges and handling and can be assembled in minutes.
- All perf top tables feature height adjustable legs (33" to 40" [838 to 1016mm] in 1" [25mm] increments).
- All tables with overhead have 74" (1880mm) high rear posts.
- Cantilever shelves are sold separately, see below.
- Customize with available accessories.

ESD Classification: Non-Conductive (Units can be made conductive with the addition of H.D. aluminum split sleeves and a cleanroom grounding cable (found on page 227).

## Perf Top

Top manufactured from 14 gauge, Type 304 electro-polished stainless steel, with .75" (19mm) holes on 1" (25mm) centers. Support members have satin finish. Table provides approximately 35% open area.

Width/Length		Approx. Pkd. Wt.		Cat. No.		Approx. Pkd. Wt.		Cat. No.	
(in.)	(mm)	(lbs.)	(kg)			(lbs.)	(kg)		
30x36	762x914	35	15.9	CTP3036S	42 1/2	19.3	CTP3036S-H		
30x48	762x1219	46	20.9	CTP3048S	53 1/2	24.3	CTP3048S-H		
30x60	762x1524	58	26.3	CTP3060S	65 1/2	29.7	CTP3060S-H		
30x72	762x1825	69	31.3	CTP3072S	76 1/2	34.7	CTP3072S-H		

## Cantilever Shelves for Overhead

All heavy-duty Cantilever shelves are 12" (317mm) wide. Electro-polished, Type 304 stainless steel.

Length		Fits Units		Approx. Pkd. Wt.		Cat. No.	
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)		
36	914	36	914	6 1/2	2.9	1236CHS	
48	1219	48	1219	10 1/2	4.8	1248CHS	
60	1524	60	1524	13	6	1260CHS	
72	1825	72	1825	15 1/2	7	1272CHS	

Note: Cannot be used with accessory grid panels.

## Perf Top Accessory Grid Panels —{58.01}

Includes attachment hardware.

Description		Width/Length		Fits Table Length		Approx. Pkd. Wt.		Cat. No.	
(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)		
Grid Panel (A)	33x36	838x914	36	914	13 4/5	6.3	WGR3336S		
Grid Panel (A)	33x48	838x1219	48	1219	18 2/5	8.3	WGR3348S		
Grid Panel (A)	33x60	838x1524	36	1524	23	10.4	WGR3360S		
Grid Panel (A)	33x72	838x1829	72	1829	27 2/5	12.5	WGR3372S		


Note 1: For use with Perf Top Tables.

Note 2: Grid panels and accessories cannot be used with overhead cantilever shelves.

## Accessories

Manufactured from Type 304 stainless steel.

Description		Width/Length		Approx. Pkd. Wt.		Cat. No.	
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)		
Monitor Shelf (B)	16 3/4 x 16 3/4	425x425	6	2.7	PBA-MSS		
Utility Shelf (C)	9x18 1/2	228x470	4	1.8	PBA-GSDS		
Utility Basket (D)	5x13 3/8 x 7	127x345x180	8 1/2	4	H209S		

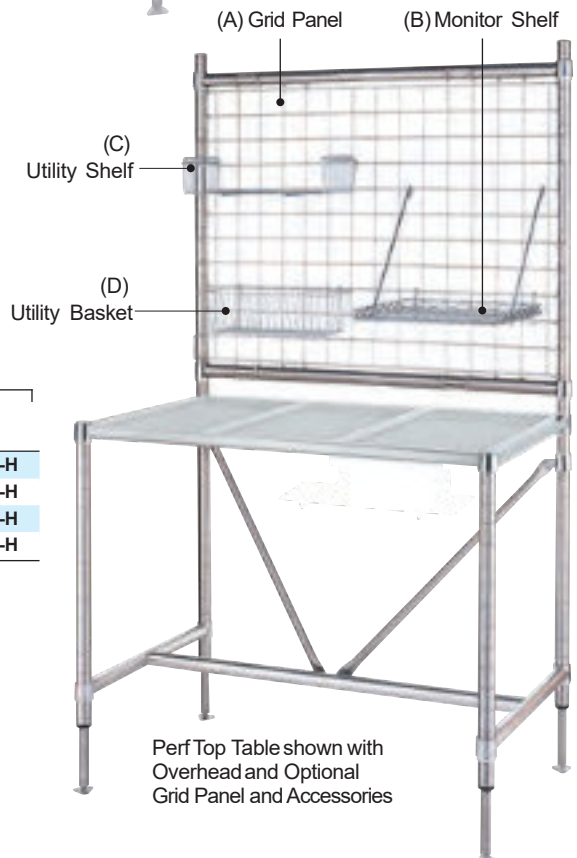

Perf Top Table shown with Overhead and Optional Grid Panel and Accessories



Cantilever Shelves

For solid top stainless steel worktables see pages 98-104.





MW100 Series

## MW Carts — {12.01} {12.05}

The most efficient way to create mobile space.

- Ergonomically-designed for low-effort transport.
- Precise handling you need to maneuver in close quarters.
- Sturdy aluminum corner castings firmly secure solid shelves to posts.

### MW Two-Shelf Models

#### MW100 Series — 2 Solid Shelves

Width/Length (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Handles and Shelf Material	Cat. No.
18x24	457x610	40	18.1	Stainless Steel	<b>MW103</b>
18x30	457x760	45	20.4	Stainless Steel	<b>MW104</b>
18x36	457x914	48	21.8	Stainless Steel	<b>MW105</b>
21x36	530x914	54	24.5	Stainless Steel	<b>MW106</b>
24x36	610x914	60	27.2	Stainless Steel	<b>MW108</b>



MW400 Series

#### MW400 Series — 1 Solid, 2 Wire Shelves

Width/Length (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Shelf Material	Handles	Cat. No.
18x24	457x610	43	19.5	Stainless Steel, Chrome	Chrome	<b>MW401</b>
18x30	457x760	47	21.3	Stainless Steel, Chrome	Chrome	<b>MW402</b>
18x36	457x914	52	23.6	Stainless Steel, Chrome	Chrome	<b>MW403</b>
21x36	530x914	59	26.8	Stainless Steel, Chrome	Chrome	<b>MW404</b>
24x36	610x914	65	29.5	Stainless Steel, Chrome	Chrome	<b>MW406</b>



MW600 Series

#### MW600 Series — 2 Wire Shelves

Width/Length (in.) (mm)		Approx. Pkd.Wt. (lbs.) (kg)		Shelf Material	Handles	Cat. No.
18x24	457x610	34	15.4	Chrome	Chrome	<b>MW601</b>
18x24	457x610	34	15.4	Stainless Steel	Stainless Steel	<b>MW602</b>
18x30	457x760	37	16.8	Chrome	Chrome	<b>MW603</b>
18x30	457x760	37	16.8	Stainless Steel	Stainless Steel	<b>MW604</b>
18x36	457x914	40	18.1	Chrome	Chrome	<b>MW605</b>
18x36	457x914	39	17.7	Stainless Steel	Stainless Steel	<b>MW606</b>
21x36	530x914	44	20.0	Chrome	Chrome	<b>MW607</b>
21x36	530x914	44	20.0	Stainless Steel	Stainless Steel	<b>MW608</b>
24x36	610x914	47	21.3	Chrome	Chrome	<b>MW611</b>
24x36	610x914	46	20.9	Stainless Steel	Stainless Steel	<b>MW612</b>

**Note:** 18" (457mm) wide carts have 4" (102mm) light-duty casters. 21" (533mm) and 24" (610mm) wide carts have 5" (127mm) light-duty casters.

**Sanitation Cart**

Designed for trash removal from controlled environments.  
 ESD Classification: Non-Conductive. (Units can be made conductive with the addition of conductive plastic split sleeves and a grounding cable.)  
 As shown, chrome, size 24"x48" (610x1219mm)  
 (2) SF55N3C —Page 57  
 (4) 33UP —Page 42  
 (2) 2448NC —Page 42  
 (2) 5MP —Page 50  
 (2) 5MPB —Page 50



Sanitation Cart

**Cleanroom Casters — {58.10}**

Designed to provide vibration dampening in controlled environments. Nickel horn, resilient tread wheel, dust cover, and Celcon bearing. Offers superior rollability and maneuverability and resists virtually all common cleaners, solvents, oils and acids.

Wheel Diameter (in.) (mm)		Face (in.) (mm)		Load Rating (kg) (lbs.)		Type	Wheel Tread	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
5	127	1 1/4	32	300	135	Stem/Swivel	High Modulus	2 1/2	1.1	5MFA
5	127	1 1/4	32	300	135	Stem/Swivel	High Modulus	2 1/2	1.1	5MFBA

**Note:** Toe-operated brake.  
**Note:** Not recommended for wet or humid environments.



5MFA



5MFA



Upright Garment Rack



Wall Mount Garment Rack



Economy Garment Rack



Garment Storage Rack

## Garment Rack — Upright and Wall Mount — {58.15}

Racks are designed to provide efficient storage of Cleanroom garments. Hangers are spaced at 3" (75mm) intervals. Electro-polished, Type 304 stainless steel hangers are included. Upright units are approximately 74" (1880mm) high; wall mount units are 7 1/2" (190mm) tall.

- Type 304 stainless steel construction throughout.
- Open-wire design promotes laminar air flow.
- Adjustable stainless steel leveling feet provide floor mount or free standing option.
- Unique hanger capture mechanism and hanger design provide theft deterrence.

ESD Classification: Non-Conductive (Units can be made conductive with use of conductive plastic split sleeves, page 227.)

### Upright

Width/Length (in.) (mm)		No. of Hangers	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
24x36	610x914	11	27	12.25	GRU2436S
24x48	610x1219	15	36	16.25	GRU2448S
24x60	610x1524	19	45	20.5	GRU2460S
24x72	610x1825	23	54	24.5	GRU2472S

### Wall Mount

Width/Length (in.) (mm)		No. of Hangers	Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
24x36	610x914	11	20	9	GRW2436S
24x48	610x1219	15	22 1/2	10.2	GRW2448S
24x60	610x1524	19	27 1/2	12.5	GRW2460S
24x72	610x1825	23	32	14.5	GRW2472S

## Economy Garment Rack — {58.15}

Metro Super Erecta shelving can be customized for many specific storage and handling tasks. The following standard components may be combined to create an economical Garment Rack, as shown, in chrome.

ESD Classification: Non-Conductive (Units can be made conductive with the addition of conductive plastic split sleeves.)

4 — 74P .....	Posts — Page 42
2 — 2448NC .....	Shelves — Page 42
4 — 9993Z .....	Footplates — Page 47
1 — SF55N3C .....	Frame — Page 57
1 — AT4824NC .....	Garment Tube — Page 59
15 — CC5923A .....	Hangers: Closed Top Loop Chrome finish

## Garment Storage Rack — {58.15}

Metro Super Erecta shelving can be customized for many specific storage and handling tasks. To store packaged garments the following standard components may be combined to create a storage rack, as shown. Stainless steel.

- Available in electro-polished, Type 304 stainless steel or chrome
- Many sizes available to meet your exact requirements

ESD Classification: Non-Conductive (Units can be made conductive with the addition of conductive plastic split sleeves.)

4 — 63UPS .....	Posts — Page 42
5 — 2448NS .....	Shelves — Page 42
15 — DD24S .....	Dividers — Page 55
5 — L48N-4S .....	Back Ledges — Page 55
10 — L24N-4S .....	Side Ledges — Page 55
2 — 5MFA .....	Stem Casters — Page 233
2 — 5MFBA .....	Stem Casters with Brakes — Page 233

### Metro Tip:

For Cleanroom Stainless Steel shelving, please refer to pages 37, 42 and 75.

## Gowning Bench — {58.15}

Heavy-duty, solid top bench provides a sturdy and comfortable gowning fixture.

- Top is manufactured from 14 gauge, Type 304 stainless steel.
- Stainless steel footplates provide floor mount or free-standing option.

ESD Classification: Non-Conductive (Units can be made conductive with the addition of H.D. aluminum split sleeves.)

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.
16x36	406x914	47 1/2	21.5	GB1636S
16x48	406x1219	55	25	GB1648S
16x60	406x1524	62 1/2	28.4	GB1660S
16x72	406x1825	70	31.8	GB1672S



Gowning Bench

## Bootie/Shoe Rack — {58.15}

Metro Super Erecta shelving can be customized for many specific storage and handling tasks. To store cleanroom booties or shoes the following standard components may be combined to create a storage rack as shown. Stainless steel.

- Available in electro-polished, Type 304 stainless steel or chrome
- Open-wire design maintains laminar air flow
- High-density storage
- Optional snap-on label holders

ESD Classification: Non-Conductive (Units can be made conductive with the addition of conductive plastic split sleeves.)

As shown, stainless steel

4 — 63PS .....	Posts — Page 42
5 — 2448NS .....	Shelves — Page 42
12 — R52S .....	Rods/Tabs — Page 57



Bootie/Shoe Rack





Stand  
ready to  
protect and  
serve.

Super Erecta®

MetroMax®

Top-Track®

# MUNICIPAL SERVICES PRODUCTS

Turn-out Gear/General Storage and Security .....	238
Sanitation & Electronic Charging Stations .....	239
Evidence & Property Storage .....	240



## Turn-Out Gear Racks

Metro's SuperAdjustable™ SuperErecta shelving can be customized to meet your exact needs.


The following standard components may be combined to create the Turn-Out Gear Rack (shown below) in Metroseal 3, Metro's patented corrosion-resistant finish. Metroseal 3 is warranted for 12 years against rust and corrosion and is manufactured with Microban®\*



Free-Standing System

antimicrobial product protection built in. Other sizes and options available, consult your Metro representative.

- 4 74UPK3 Mobile Posts
- 3 A2472NK3 SuperAdjustable™ Shelves in Metroseal 3 finish
- 2 5MP Swivel Casters (optional)
- 2 5MPB Swivel/Brake Casters (optional)
- 6 DD24K3 Dividers, in Metroseal 3 finish (used to create individual compartments)
- 1 DD2435D 72" (1829mm) Stainless Steel Hanger Tube
- 5 CC5923 Gear Hangers, Stainless Steel finish, closed top loop



### Metro Tip:

When planning Turn-Out Gear Racks, use shelving that is 24" (610mm) wide to best accommodate turn-out gear.



Wall Mounted System

- Open wire design promotes air circulation and light penetration for quicker drying of gear.
- Free-standing and wall-mounted units available.
- Two finishes available: durable chrome-plated, or patented Metroseal 3 (NK3) which carries a 12-year warranty against rust and corrosion, and offers Microban antimicrobial product protection. (See pages 37 and 42.)
- Stainless steel and chrome-plated gear hanging tube and hangers available
- Optional shelf dividers and label holders can be used to create individual compartments.



## General Storage



Super Adjustable™ Super Erecta® All-Purpose Storage (See page 37)

## Security Units



To keep gear, communication devices, etc. safe and secure. (See Pages 132-137)

\*Microban inhibits the growth of mold, mildew and bacteria.

## Sanitation/Decontamination Stations

### Sanitization Supply Storage

- Economical storage rack perfect for storing supplies over sinks or above work areas.
- Numerous sizes, styles and finishes available.

(See Wall Shelving page 90)



## Sanitization Supply/Task Station

Metro's SmartWall® is a wall mount system of interchangeable components that allow customization of a sanitization area.

- Shelves, grids and accessories are easily attached where needed, keeping supplies within arm's reach.
- The wall track's smooth surface can be quickly wiped clean. Shelves and grids can be easily removed for cleaning and to clean the walls.
- Shown in Metroseal3®, Metro's patented corrosion-resistant finish with Microban antimicrobial product protection. Metroseal3 has a 12-year warranty against rust and corrosion.

(See pages 82-87)



## Electronic Equipment Charging Stations



Desktop and Free-Standing Units Available. (See "Solid Shelving" page 74-76)

\*Microban inhibits the growth of mold, mildew and bacteria.



### Evidence and Property Storage

Keep evidence and property safe, secure and organized with Metro's high-density active storage systems. Available in a variety of sizes and finishes, including corrosion-proof materials.

(See pages 108-115)

**See pg. 115  
for Easy Order  
with one Part #.**

Get all you need to create efficient high-density storage under one simple part number.

### qwikTRAK® High-Density Storage



### Top-Track® High-Density Storage



(Shown with optional accessories)

### MetroMax® Storage System

- Ideal for refrigerated storage.
- Corrosion and rust proof — lifetime warranty.
- Easily cleanable—lift off shelf mats are sized to fit utility sinks.
- Microban® antimicrobial product protection is built-in, inhibiting the growth of mold, mildew and bacteria.

(See pages 10-29)



### Metro® Totes and Storage Bins

- Perfect for storing small items.
- Optional accessories include dividers, lids and label holders.

(See pages 228-229)



# TERMS AND CONDITIONS (SUBJECT TO CHANGE)

## Standard Terms and Conditions of Sale

### 1. Prices:

Unless otherwise specified in writing by Seller, Seller's price for the goods shall remain in effect for sixty (60) days after the date of Seller's quotation or acknowledgment of Buyer's order for the Goods, whichever occurs first, provided an unconditional, complete authorization for the immediate shipment of the Goods is received and accepted by Seller within such time period. If such authorization is not received by Seller within such sixty (60) day period, Seller shall have the right to change the price for the Goods to Seller's price for the Goods at the time of shipment.

### 2. Taxes:

Any current or future tax or governmental charge (or increase in same) affecting Seller's costs of production, sale, or delivery or shipment, or which Seller is otherwise required to pay or collect in connection with the sale, purchase, delivery, storage, processing, use or consumption of Goods, shall be for Buyer's account and shall be added to the price or billed to Buyer separately, at Seller's selection.

### 3. Terms of Payment:

Subject to the approval of Seller's Credit Department, terms are 1% ten (10) days net thirty (30) days from date of Seller's invoice in U.S. currency. Freight and handling charges are not subject to discount. If any payment owed to Seller is not paid when due, it shall bear interest at a rate to be determined by Seller, which shall not exceed the maximum rate permitted by law, from the date on which it is due until it is paid. Should Buyer's financial responsibility become unsatisfactory to Seller, cash payments or security satisfactory to Seller may be required by Seller for future deliveries and for the Goods theretofore delivered. If such cash payment or security is not provided, in addition to Seller's other rights and remedies, Seller may discontinue deliveries. Seller shall have the right among other remedies, either to terminate the Agreement or to suspend further performance under this and/or other agreements with Buyer in the event Buyer fails to make any payment when due, which other agreements Buyer and Seller hereby amend accordingly. Buyer shall be liable for all expenses, including attorneys' fees, relating to the collection of past due amounts.

### Minimum Order:

Orders under Seller's Minimum Order Net will be charged a then-current Freight and Handling Fee or a then-current Handling Fee plus actual freight costs when applicable. See [www.metro.com/Terms](http://www.metro.com/Terms) for Seller's current Minimum Order value and associated Fees.

### Returns of Non-Defective Goods:

Written approval from Seller's customer service is required to return merchandise. All merchandise must be returned within 45 days from the invoice date and be returned in original, unopened, and resalable packaging.

Returns must meet Seller's then-current Minimum Return value and may be subject to a then-current restock charge. See [www.metro.com/Terms](http://www.metro.com/Terms) for Metro's current Minimum Return value and restock charge. Exceptions—Special orders of cut posts, made to order dollies, cart covers, Designer Color product, Configured Products, and custom or made-to-order Goods are not returnable (See Section 17).

### 4. Shipment and Delivery:

While Seller will use all reasonable commercial efforts to maintain the delivery date(s) acknowledged or quoted by Seller, all shipping dates are approximate and not guaranteed. Seller reserves the right to make partial shipments and to segregate Configured Products and other made-to-order Goods from normal stock Goods. Seller, at its option, shall not be bound to tender delivery of any Goods for which Buyer has not provided

shipping instructions and other required information. If the shipment of the Goods is postponed or delayed by Buyer for any reason, Buyer agrees to reimburse Seller for any and all storage costs and other additional expenses resulting therefrom. Risk of loss and legal title to the Goods shall transfer to Buyer for sale in which the end destination of the Goods is outside of the United States immediately after the Goods have passed beyond the territorial limits of the United States. For all other shipments, risk of loss for damage and responsibility shall pass from Seller to Buyer upon delivery to and receipt by carrier at Seller's shipping point. All shipments are F.O.B. Seller's shipping point. Any claims for shortages or damages suffered in transit are the responsibility of Buyer and shall be submitted by Buyer directly to the carrier. Shortages or damages must be identified and signed for at the time of delivery. Order consolidation may be available for an additional charge and Buyer may contact Seller's customer service for more information.

### 5. Limited Warranty:

Subject to the limitations of Section 6, Seller warrants that the Software will execute the programming instructions provided by Seller and that the Goods will be free from defects in material and workmanship under normal use, service and maintenance for a period of one (1) year from the date of shipment of the Goods by Seller, unless otherwise specified by Seller in writing. Seller does not warrant that the operation of the Software shall be uninterrupted or error free. THE WARRANTIES SET FORTH IN THIS SECTION 5 AND THE WARRANTY SET FORTH IN SECTION 7, ARE THE SOLE AND EXCLUSIVE WARRANTIES GIVEN BY SELLER WITH RESPECT TO THE GOODS AND ARE IN LIEU OF AND EXCLUDE ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, ARISING BY OPERATION OF LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHETHER OR NOT THE PURPOSE OR USE HAS BEEN DISCLOSED TO SELLER IN SPECIFICATIONS, DRAWINGS OR OTHERWISE, AND WHETHER OR NOT SELLER'S PRODUCTS ARE SPECIFICALLY DESIGNED AND/OR MANUFACTURED BY SELLER FOR BUYER'S USE OR PURPOSE.

These warranties do not extend to any loss or damages due to misuse, accident, abuse, neglect, normal wear and tear, negligence (other than Seller's), unauthorized modification or alteration, use beyond rated capacity, or improper installation, maintenance or application. To the extent that Buyer or its agents has supplied specifications, information, representation of operating conditions or other data to Seller in the selection or design of the Goods and the preparation of Seller's quotation, and in the event that actual operating conditions or other conditions differ from those represented by Buyer, warranties or other provisions contained herein which are affected by such conditions shall be null and void.

If within thirty (30) days after Buyer's discovery of any warranty defects within the warranty period, Buyer notifies Seller thereof in writing, Seller shall, at its option, and as Buyer's exclusive remedy, repair, correct or replace F.O.B. point of manufacture, or refund the purchase price for, that portion of the goods found by Seller to be defective.

Failure by Buyer to give such written notice within the applicable time period shall be deemed an absolute and unconditional waiver of Buyer's claim for such defects. All costs of dismantling, reinstallation and freight and the time and expense of Seller's personnel and representatives for site travel and diagnosis under these warranties shall be borne by Buyer unless accepted in writing by Seller. Goods repaired or replaced during the warranty period shall be covered by the foregoing

warranty warranties for the remainder of the original warranty period or ninety (90) days from the date of shipment, whichever is longer.

Buyer assumes all other responsibility for any loss, damage, or injury to person or property arising out of, connected with, or resulting from the use of Goods, either alone or in combination with other products/components.

Section 5 applies to any entity or person who may buy, acquire or use the Goods, including any entity or person who obtains the Goods from Buyer, and shall be bound by the limitations therein, including Section 6. Buyer agrees to provide such subsequent transferee conspicuous, written notice of the provisions of Sections 5 and 6.

Buyer assumes all other responsibility for any loss, damage, or injury to person or property arising out of, connected with, or resulting from the use of Goods, either alone or in combination with other products/components.

In addition to the above standard warranty, Seller offers a Metro ESPParts-Only Extended Warranty Option, a Metro ESPParts & Labor Extended Warranty Option and Metro ESPPreventive Maintenance Option. To learn more about the terms of these options, see Seller's website at [www.metro.com/terms](http://www.metro.com/terms). If Buyer elects to purchase a Metro ESPOption, Buyer will be bound to the terms and conditions, which are contained on such website address, at the time of Buyer's order submission. Seller reserves the right to change the terms of such Metro ESPOptions at any time in its discretion; provided, that the terms in effect at the time of Buyer's order shall remain the terms applicable to such order.

### 6. Limitation of Remedy and Liability:

THE SOLE AND EXCLUSIVE REMEDY FOR BREACH OF ANY WARRANTY HEREUNDER (OTHER THAN THE WARRANTY PROVIDED UNDER SECTION 7) SHALL BE LIMITED TO REPAIR, CORRECTION OR REPLACEMENT, OR REFUND OF THE PURCHASE PRICE UNDER SECTION 5.

SELLER SHALL NOT BE LIABLE FOR DAMAGES CAUSED BY DELAY IN PERFORMANCE AND THE REMEDIES OF BUYER SET FORTH IN THIS AGREEMENT ARE EXCLUSIVE. IN NO EVENT, REGARDLESS OF THE FORM OF THE CLAIM OR CAUSE OF ACTION (WHETHER BASED IN CONTRACT, INFRINGEMENT, NEGLIGENCE, STRICT LIABILITY, OTHER TORT OR OTHERWISE), SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMERS EXCEED THE PRICE PAID BY BUYER FOR THE SPECIFIC GOODS PROVIDED BY SELLER GIVING RISE TO THE CLAIM OR CAUSE OF ACTION. BUYER AGREES THAT IN NO EVENT SHALL SELLER'S LIABILITY TO BUYER AND/OR ITS CUSTOMER EXTEND TO INCLUDE INCIDENTAL, CONSEQUENTIAL OR PUNITIVE DAMAGES. The term "consequential damages" shall include, but not be limited to, loss of anticipated profits, business interruption, loss of use, revenue, reputation and data, costs incurred, including without limitation, for capital, fuel, power and loss or damage to property or equipment.

It is expressly understood that any technical advice furnished by Seller with respect to the use of the Goods is given without charge, and Seller assumes no obligation or liability for the advice given, or results obtained, all such advice being given and accepted at Buyer's risk.

### 7. Patents and Copyrights:

Subject to the limitations of the second paragraph of Section 6, Seller warrants that the Goods sold, except as made specifically for Buyer according to Buyer's specifications, do not infringe any valid U.S. patent



# TERMS AND CONDITIONS



or copyright in existence as of the date of shipment. This warranty is given upon the condition that Buyer promptly notify Seller of any claim or suit involving Buyer in which such infringement is alleged and cooperate fully with Seller and permit Seller to control completely the defense, settlement or compromise of any such allegation of infringement. Seller's warranty as to use of patents only applies to infringement arising solely out of the inherent operation according to Seller's specifications and instructions (i) of such Goods, or (ii) of any combination of Goods acquired from Seller in a system designed by Seller. In the event such Goods are held to infringe such a U.S. patent or copyright in such suit, and the use of such Goods is enjoined, or in the case of a compromise or settlement by Seller, Seller shall have the right, at its option and expense, to procure for Buyer the right to continue using such Goods, or replace them with non-infringing Goods, or modify same to become non-infringing, or grant Buyer a credit for the depreciated value of such Goods and accept return of them. In the event of the foregoing, Seller may also, at its option, cancel the agreement as to future deliveries of such Goods, without liability.

## 8. Excuse of Performance:

Seller shall not be liable for delays in performance or for non-performance due to the following (none of which is as a result of Seller's negligent or intentional conduct): acts of God, acts of Buyer, war, riot, fire, flood, power surges, other severe weather, sabotage, or epidemics; strikes or labor disturbances; governmental requests, restrictions, laws, regulations, or orders; actions; unavailability of or delays in transportation; default of suppliers; or unforeseen circumstances or any events or causes beyond Seller's reasonable control. If Seller determines that its ability to supply the total demand for the Goods is made impracticable due to causes addressed in this Section 8, Seller may allocate its available supply of the Goods or such material (without obligation to acquire other supplies of any such Goods or such materials) among itself and its purchaser on such basis as Seller determines to be equitable without liability for any failure of performance which may result therefrom. Deliveries suspended or not made by reason of this section may be canceled by Seller upon notice to Buyer without liability, but the balance of the agreement shall otherwise remain unaffected as a result of the foregoing.

If Seller determines that its ability to supply the total demand for the Goods, or to obtain material used directly or indirectly in the manufacture of the Goods, is hindered, limited or made impracticable due to causes set forth in the preceding paragraph, Seller may allocate its available supply of the Goods or such material (without obligation to acquire other supplies of any such Goods or material) among its purchasers on such basis as Seller determines to be equitable without liability for any failure of performance which may result therefrom.

## 9. Cancellation:

The Buyer may cancel orders only upon written notice and upon payment to Seller of cancellation or restocking charges which include, among other things, all costs and expenses incurred and commitments made by the Seller and a reasonable profit thereon. Larger requirements of made-to-order products may require a non-cancelable purchase order. Provided, however, Buyer shall incur no costs for canceling orders in which seller has not timely delivered. Once ordered, Metro ESP options may not be cancelled, and are not refundable, in whole or part.

## 10. Changes:

Buyer may request changes or additions to the Goods consistent with Seller's specifications and criteria. In the event such changes or additions are accepted by Seller, Seller may revise the price and delivery schedule.

Seller reserves the right to change designs and specifications for the Goods without prior notice to Buyer, except with respect to Goods being made-to-order for Buyer.

## 11. Tooling:

Tool, die, and pattern charges, if any, are in addition to the price of the Goods and are due and payable upon completion of the tooling. All such tools, dies and patterns shall be and remain the property of Seller. Charges for tools, dies, and patterns do not convey to Buyer, title, ownership interests in, or right to possession or removal, nor prevent their use by Seller for other purchasers, except as otherwise expressly provided by Seller and Buyer in writing with reference to this provision.

## 12. Assignment:

Buyer shall not assign its rights or delegate its duties hereunder or any interest therein or any rights hereunder without the prior written consent of the Seller, and any such assignment, without such consent, shall be void.

## 13. Software:

Notwithstanding any other provision herein to the contrary, Seller or applicable third party licensor to Seller shall retain all rights of ownership and title in its respective Software, including without limitation all rights of ownership and title in its respective copies of such Software. Except as otherwise provided herein, Buyer is hereby granted a nonexclusive, non-transferable royalty free license to use the Software incorporated into the Goods solely for purposes of Buyer properly utilizing such Goods purchased from Seller. All other Software shall be furnished to, and used by, Buyer only after execution of Seller's (or the licensor's) applicable standard license agreement.

## 14. General Provisions:

These terms and conditions supersede all other communications, negotiations and prior oral or written statements regarding the subject matter of these terms and conditions. No change, modification, rescission, discharge, abandonment or waiver of these terms and conditions shall be binding upon the Seller unless made in writing and signed on its behalf by a duly authorized representative of Seller. No conditions, usage of trade, course of dealing or performance, understanding or agreement purporting to modify, vary, explain, or supplement these terms and conditions shall be binding unless hereafter made in writing and signed by the party to be bound, and no modification or additional term shall be applicable to this agreement by Seller's receipt, acknowledgment, or acceptance of purchase orders, shipping instruction forms, or other documentation containing terms at variance with or in addition to those set forth herein. Any such modifications or additional terms are specifically rejected by Seller. No waiver by either party with respect to any breach or default or of any right or remedy, and no course of dealing, shall be deemed to constitute a continuing waiver of any other breach or default or of any other right or remedy, unless such waiver be expressed in writing and signed by the party to be bound. All typographical or clerical errors made by Seller in any quotation, acknowledgment or publication are subject to correction.

The validity, performance, and all other matters relating to the interpretation and effect of this agreement shall be governed by the law of the State of Pennsylvania without regard to its conflict of laws principles. Buyer and Seller agree that the proper venue for all actions arising in connection herewith shall be only in Pennsylvania and the parties agree to submit to such jurisdiction. No action, regardless of form, arising out of transactions relating to this contract, may be brought by either party more than two (2) years after the cause

of action has accrued. The Convention for the International Sale of Goods shall not apply to this agreement.

## 15. Buyer's Compliance with Laws:

In connection with the transactions contemplated by this agreement, Buyer is familiar with and shall fully comply with all applicable laws, regulations, rules and other requirements of the United States and of any applicable state, foreign and local governmental body in connection with the purchase, receipt, use, shipment, transfer and disposal of the Goods.

## 16. Export/Import:

Buyer agrees that all applicable import and export control laws, regulations, orders and requirements, including without limitation those of the United States and the European Union, and the jurisdictions in which the Seller and Buyer are established or from which Goods and Services may be supplied, will apply to their receipt and use. In no event shall Buyer use, transfer, release, import, export, Goods in violation of such applicable laws, regulations, orders or requirements.

## 17. Additional Terms & Conditions Expressly Related to Configured Products\*:

The following Terms and Conditions provided expressly for Configured Products supersede those stated for all other Goods of Seller. Those situations not specifically addressed by the following Configured Products Terms and Conditions are governed by Seller's standard Terms and Conditions of Sales provided above.

### A. Configured Products—Order Change/ Cancellation Policy:

All order change requests must be requested through Seller's customer service. Changes/cancellations requested within 7 workdays of the scheduled ship date that will impact order production, will incur, a then-current minimum Change/Cancellation Fee, up to the full order value, depending on the percentage of the order completed. See [www.metro.com/termsfor](http://www.metro.com/termsfor) Metro's Configured Products minimum order Change/Cancellation Fee. Customer service will relay percentage of order completed along with the Change/Cancellation Fee amount. Prior to Seller accepting the change, a revised purchase order (including associated Fee) is required. Orders for C5 cabinets with an "A" suffix are non-cancellable and non-returnable.

### B. Configured Products—Return Policy

—Accessories are returnable at the sole discretion of Seller.

- A Return Merchandise Authorization (RMA) must be obtained through Seller's customer service prior to returning the product.
- All returns will be coordinated by Seller's customer service and return freight costs will be charged back.
- All returns must be in original packaging, unused and in saleable condition.
- All returns must be made within 45 days of invoice date.

Returns must meet Metro's then-current Minimum Return Value and may be subject to a then-current restock charge. See [www.metro.com/Termsfor](http://www.metro.com/Termsfor) Metro's current Minimum Return Value and Configured Product Restock Charge.

*\*Configured Products apply to thermal holding and transport cabinets, healthcare carts, point-of-care workstations, automated dispensing products, modular work centers, countertops, fixtures and medication carts.*



Most Metro Foodservice Products are listed by National Sanitation Foundation. For specific items, please check the latest NSF foodservice listing.



## PRODUCT INDEX

PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE	PRODUCT	PAGE
<b>Bench, Gowning</b> .....	<b>172</b>	<b>Frames</b>		<b>Reel Storage, SMT</b> .....	<b>225</b>	Dust .....	52
<b>Carts</b>		Dolly .....	52	<b>Security Trucks and Units</b> .....	<b>103-107</b>	ESD Cart .....	215-217
Autoclave .....	175	MetroMax .....	27			Dividers .....	22, 23, 55, 57, 76, 77
Basket .....	127	Three-Sided .....	57			Enclosure Panels .....	24, 56
Benchside .....	217	<b>Furniture, Lab</b>		<b>Shelves</b>		Foot Plates .....	14, 47, 71
Cleanroom Wire/Solid .....	230	Starsys System .....	178-210	Basket .....	27, 47, 134	Floor Glides .....	47
Electronic Tray .....	214-216	<b>Grounding Cables</b> .....	<b>227</b>	Cantilever .....	46, 134, 150	Handles .....	49, 54
Feed .....	177			Dunnage .....	46, 71	Hooks .....	58, 132
Glassware .....	159	<b>Hangers</b>		Triangle .....	150	Inlays, Shelf .....	58
Kitting .....	218	Extension Display .....	60	<b>Shelving</b>		Keyboard Tray .....	63
Lab .....	156-209	Garment Tube .....	58	Appeal .....	65	Label Holders .....	25, 35, 61
Lab Animal Research .....	176	Rail .....	57	Autoclave .....	174-175	Ledges .....	22, 23, 55
Liquid Chromatography .....	158	Swing .....	60	Convenience Pak .....	46	Leveling Feet .....	47
PCB .....	214-221	<b>HD qwikTRAK</b> .....	<b>108-112, 118</b>	Designer .....	68-71	Power Strip .....	63
Metal .....	160-161	<b>High-Density Storage</b> .....	<b>108-118</b>	Drop Mat .....	77	Rods and Tabs .....	57
Sanitation .....	233	<b>Inventory Storage</b> .....	<b>141-144</b>	Erecta Shelf .....	78	"S" Hooks .....	38, 44
Slanted Shelf .....	71			HD Super .....	119	Shelf Markers .....	25, 35
Smart Tray .....	214-216	<b>Kits</b>		Hi-Rise .....	12	Slides .....	26, 59, 76
Stem Caster .....	18, 39, 48	ESD .....	227	MetroMax i Polymer .....	12	Split Sleeves .....	47
Tray .....	214-216	Solid Mat Overlay .....	16	MetroMax 4 .....	14-15	Tote Boxes .....	228
<b>Utility</b>		<b>Merchandisers, Slanted Shelf</b> .....	<b>151</b>	MetroMax Q Polymer .....	17	Tow Bar Assembly .....	54
Accessories .....	127			Wire Hybrid .....	17	Wedge Connector .....	12, 14, 16
Deep Ledge .....	127	<b>Posts</b>		Platform .....	102, 131	Wire Management Clip .....	63
Heavy Duty .....	21	Designer .....	43	quikSLOT .....	66-71	<b>Smart Tray System</b> .....	<b>214-216</b>
MetroMax i .....	19, 21	HD Super .....	78	Reel .....	225	<b>Starsys System</b> .....	<b>178-209</b>
MetroMax Q .....	19, 21	MetroMax i .....	12	Seismic .....	120-121	<b>Table Accessories</b> .....	<b>98-101</b>
myCart Series .....	124-125	MetroMax 4 .....	14	SmartLever .....	93-95	<b>Tables</b> .....	<b>98-104, 231</b>
myFold .....	126	MetroMax Q .....	16	<b>Starter and Add-On Units</b>		<b>Tables</b> .....	<b>98-104, 231</b>
Standard Duty .....	128	quikSLOT .....	65	MetroMax i .....	12	<b>Tote Boxes</b> .....	<b>228</b>
Wine .....	152	Super Erecta .....	35, 37, 42, 174	MetroMax Q .....	17	<b>Trucks</b>	
<b>Caster Guide</b> .....	<b>51</b>	<b>Printed Circuit Board Handling</b>		Super Adjustable .....	36-39	Super Erecta Shelf Dolly .....	49
<b>Casters</b>		Accessories .....	216	Super Erecta .....	44-45	<b>Wall Shelving</b>	
Antimicrobial .....	50	Hand-Held Carriers .....	220	Super Adjustable .....	36-39	Brackets .....	86-95
Cleanroom .....	233	PCB Carts .....	114-221	Super Erecta .....	32-35	Erecta Shelf .....	88
Conductive .....	226	Smart Tray System .....	214-216	Super Erecta Pro .....	32-35	MetroMax i .....	90
Decorative .....	51	<b>Racks</b>		Super Erecta Shelf .....	74-76	SmartWall G3 .....	82-87
Electronic .....	226	Bootie/Shoe .....	235	Super Erecta Shelf .....	40-61	Super Erecta Shelf .....	88-89
High-Temperature .....	50	Can .....	26	TopTrack .....	112-118	<b>Wine Merchandisers</b> .....	<b>152</b>
Plate .....	53	Cleanroom Garment .....	234	quikTRAK .....	108-111	<b>Work Stations</b>	
Polymer .....	18, 50	Drying .....	28	<b>Shelving Accessories</b>		PrepMate .....	91-92
Stainless Steel .....	18, 50	Dunnage .....	130-131	Baskets .....	27, 59, 60	SmartLever .....	96-97
Stem .....	18, 50, 226	End Load .....	137	Bins .....	72-73	SmartStations .....	93-95
<b>Clean Tables, Perf Top</b> .....	<b>231</b>	Garment .....	172, 234	Bumpers .....	51, 71	<b>Work Tables &amp; Accessories</b> .....	<b>98-104</b>
<b>Computer Accessories</b> .....	<b>63</b>	Gowning .....	172, 235	Clamps			
<b>Counter Units</b> .....	<b>75</b>	Side Load .....	221	Joining .....	14, 47, 68		
<b>Dollies</b>		Tray Drying .....	28	Post .....	14, 47, 68		
Made-To-Order .....	52	Turn-Out Gear .....	238	Color Identification Tubes .....	61		
Truck .....	52	Wire Tray Carts .....	221	Covers			
<b>Flexline</b> .....	<b>162-169</b>			Autoclave .....	175		
				Cart .....	61		



# Look inside for what's new.



**NEW qwikSlot®**  
2-Bin Storage System  
pg.70



**NEW MetroMax® 4**  
All-Polymer Shelving System  
pg.14



**NEW SpaceSaver Worktables**  
Stainless Steel 24" Deep  
pg.98



**NEW SmartLever™**  
Multifunctional Storage & Workstations  
pg.93

**Corporate Headquarters**  
651 North Washington Street  
Wilkes-Barre, PA 18705  
Phone: +1 570 825 2741  
Fax: +1 570 825 2852

**U.S. & Canada Customer Service**  
Phone: 1 800 992 1776  
Fax (PA): +1 800 638 9263  
Fax: (CA): +1 800 638. 3292

**International Sales/  
Customer Service Offices**  
**Middle East/Africa/India**  
Dubai-United Arab Emirates  
Phone: +971 4 811 8286  
Fax: +971 4 886 5465

**Asia/Pacific**  
Singapore  
Phone: +65 6829 5382

**Latin America**  
Mexico  
Phone: +52 33 362 778 30

**Europe**  
The Netherlands  
Phone: +31 76 587 7550  
Fax: +31 76 581 1313

**HON.** Allsteel



**OfficeMart**

#Sololosmejoresmuebles

## CONTÁCTANOS

ventas@oficemart.mx

www.oficemart.mx

MXL. (686) 558 7874

TJN. (664) 689 2823

ENS. (646) 144 6382

Te asesoramos en el diseño de tus espacios de trabajo sin costo